


### dormakaba 96 00 terminal

## Time recording in a compact design

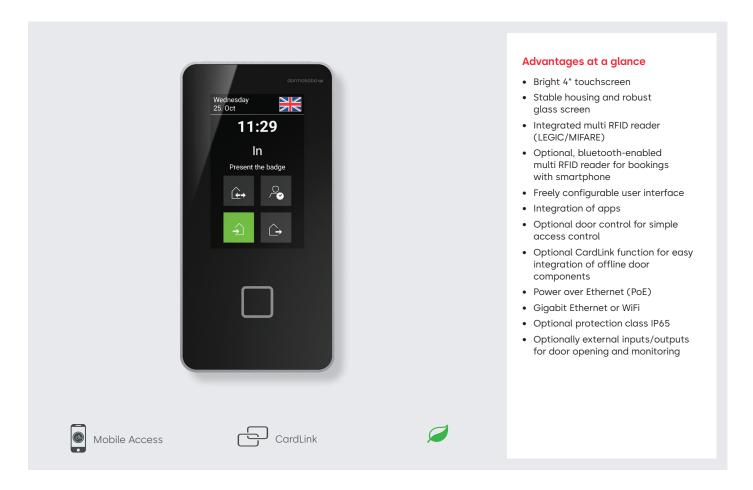

Are you looking for a secure and uncomplicated time recording? With the terminal 96 00, we offer you a flexible, small all-rounder that you can expand later without any difficulty.

In addition to time recording, the terminal 96 00 provides you with door control options and modern staff communication. The user interface offers extensive configuration options to be adapted to your corporate identity featuring company-specific content and applications. Its stable housing and robust glass screen make the terminal durable in application.

The employee identification is done in contactless manner through the integrated multi RFID reader using an RFID medium or smartphone. Additional options like CardLink extend the scope of functions based on demand. That way, you can connect your digital door components of a standalone access control to an online access solution without any difficulty.

# Select the device that meets your requirements from the different option packages:

Terminal 96 00 is available in the option packages 96 20, 96 40 and 96 60. These choices give you the option of customising your device to meet your individual requirements.

| 9600-K6                                     | Option<br>package<br>96 20 | Option<br>package<br>96 40 | Option<br>package<br>96 60 |
|---|----------------------------|----------------------------|----------------------------|
| Device software                             |                            |                            |                            |
| B-client HR20                               | •                          | •                          | •                          |
| Reader                                      |                            |                            |                            |
| Multi RFID reader (LEGIC/MIFARE) with BLE   | •                          | •                          | •                          |
| HID iClass SE proximity reader              | 0                          | 0                          | 0                          |
| Host interface                              |                            |                            |                            |
| 10/100/1000 Ethernet Interface (IPv4, IPv6) | •                          | •                          | •                          |
| WLAN  | 0                          | 0                          | 0                          |
| Power supply                                |                            |                            |                            |
| Power over Ethernet                         | •                          | •                          | •                          |
| Options                                     |                            |                            |                            |
| Door control                                | 0                          | 0                          | •                          |
| Data encryption                             | •                          | •                          | •                          |
| CardLink / AoC / DoC                        | 0                          | •                          | •                          |
| Mobile Access – booking with a smartphone   | 0                          | •                          | •                          |
| Storage options                             |                            |                            |                            |
| 200 persons                                 | •                          | _                          | _                          |
| 1,000 persons                               | 0                          | •                          | _                          |
| 2,000 persons                               | 0                          | 0                          | •                          |
| 10,000 persons                              | 0                          | 0                          | 0                          |
| 10,000+ persons                             | 0                          | 0                          | 0                          |
| Design                                      |                            |                            |                            |
| Increased protection class IP65             | 0                          | 0                          | -                          |
| Surface-mounted cable feed                  | 0                          | 0                          | _                          |
| Add-on I/Os (surface-mounted)               | 0                          | 0                          | •                          |
| Remote I/Os (flush-mounted)                 | 0                          | 0                          | 0                          |

Note: The scope of effectively available product functions depends on the context in which the system is used.

Standard Option 0 Not possible

#### **Our Sustainability Commitment**

dormakaba is committed to foster a sustainable development along our entire value chain.

In order to give quantified disclosures of a product's environmental impact and its ecological footprint, dormakaba provides Environmental Product Declarations (EPDs). Please download the EPD and read more about our sustainability commitment here or use the QR code provided.





#### **Technical specification**

- Data recording terminal
- Freescale i.MX6DualLite processor
- 4" touchscreen 480 x 800 pixels
- dormakaba-specific Android
- 2 GB RAM, 8 GB eMMC Flash

#### Interfaces

- External I/Os (2 relays, 4 digital inputs) via:
  - Add-On I/Os for 9600-K6
  - Removed I/Os for 9600-K6

#### **Power supply**

- Power over Ethernet (IEEE 802.3at)
- Power class 0 (0.44-12.95 W)

#### **Environment**

- Ambient temperature: -25 °C to +55 °C
- Relative humidity: 5% to 85% (non-condensing)
- Protection class according to IEC 60529: IP20/IP54/IP65 depending on version

#### Housing

- Robust plastic/aluminium housing with wall mounting plate
- Optional external I/Os (2 relays, 4 inputs)
- Optional external magnetic stripe card reader

#### Dimensions (W x H x D) without mounting plate

• 89 mm x 177 mm x 32 mm (main device)

You will find further details and order information in the relevant dormakaba catalogues or system descriptions.

WN 05520751532 Subject to technical modifications. © 2023 dormakaba. Date 08/2023







