


INSTALLATION

RCI 906, 908, 916, 919, 920 MUSHROOM CAP PUSHBUTTONS

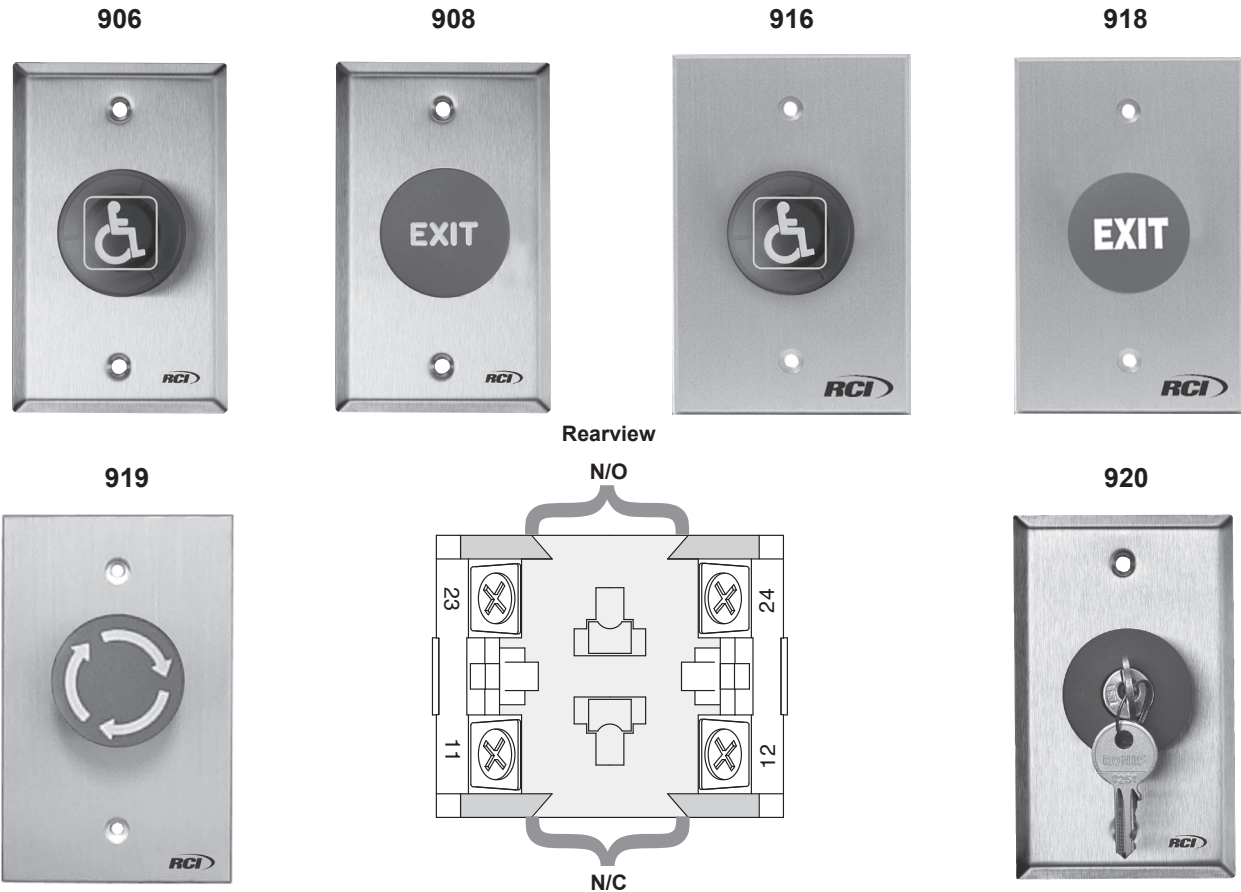

Description	Switch Mode	Switch Configuration	Switch Rating	Standard
906-MO Handicap	Momentary Action	1 x SPST N/O & 1 SPST N/C	6A @24V cULus	32D Blue Cap
906-TD Handicap	Adj. Delay 1 sec - 34 hrs*	DPDT N/O & N/C	Timer rated 5A @24V	32D Blue Cap
906-MA Handicap	Maintained Action	1 x SPST N/O & 1 SPST N/C	6A @24V cULus	32D Blue Cap
908-MO Exit Button	Momentary Action	1 x SPST N/O & 1 SPST N/C	6A @24V cULus	32D Red Cap
908-TD Exit Button	Adj. Delay 1 sec - 34 hrs*	DPDT N/O & N/C	Timer rated 5A @24V	32D Red Cap
908-MA Exit Button	Maintained Action	1 x SPST N/O & 1 SPST N/C	6A @24V cULus	32D Red Cap
916-MO Handicap	Momentary Action	1 x SPST N/O & 1 SPST N/C	6A @24V cULus	28 or 40 Blue Cap
916-TD Handicap	Adj. Delay 1 sec - 34 hrs*	DPDT N/O & N/C	Timer rated 5A @24V	28 or 40 Blue Cap
916-MA Handicap	Maintained Action	1 x SPST N/O & 1 SPST N/C	6A @24V cULus	28 or 40 Blue Cap
918-MO Exit Button	Momentary Action	1 x SPST N/O & 1 SPST N/C	6A @24V cULus	28 or 40 Red Cap
918-TD Exit Button	Adj. Delay 1 sec - 34 hrs*	DPDT N/O & N/C	Timer rated 5A @24V	28 or 40 Red Cap
918-MA Exit Button	Maintained Action	1 x SPST N/O & 1 SPST N/C	6A @24V cULus	28 or 40 Red Cap
919-MA Rotary Release	Maintained Action	1 x SPST N/O & 1 SPST N/C	6A @24V cULus	28 or 40 Red Cap
920-MA Key Release	Maintained Action	1 x SPST N/O & 1 SPST N/C	6A @24V cULus	32D Red Cap

*Mounted separately. N/C – Normally Closed; N/O – Normally Open **NOTE:** Specifications are subject to change without notice.