dormakaba 🚧

Jamb mounted video camera



Description

This enhanced definition color video camera is designed to monitor the usage and traffic flow of pedestrian doors.

Its sleek, low profile design provides a discreet method for improving loss prevention and limiting liability.

The RCA video output can be seamlessly integrated into most existing video surveillance systems.

Features & benefits


- Full color video with resolution of 480 × 720 (480p).
- Standard RCA video output.
- Wide angle lens for complete view of door and traffic flow.
- Integrated voltage regulator for installation convenience.
- Low profile design minimizes accidental damage from shopping carts and other errant objects.
- Reversible left and right mounting for application flexibility.

Related products



DX3336-012 IXIO-DT1 with video camera


Applications

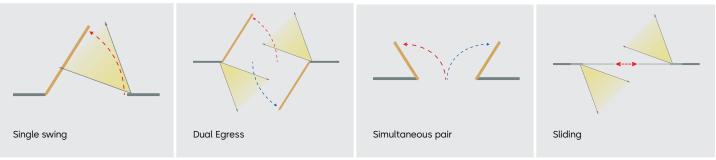


Technical specifications

Supply voltage	6.6 - 36 VDC; ±10% 6.0 - 28 VAC; ±10%
Operating temperature	-22 °F – 140 °F (RH 95% max) (-30 °C – 60 °C)
Video output	1.0 (Vp-p) / 75Ω
Image sensor	CMOS
Horizontal resolution	480 TVL
NTSC output	720 (H) × 480 (W)
Sync system	Inter-Sync
Frame rate	30 fps
Minimum illumination	0.01 LUX
AE control	Auto
Gain control	Auto
Electronic shutter	1 s ~ 1/10,000 s
S/N ratio	> 50 dB
AWB	Auto
Dimensions	1.75" (W) × 3" (H) × 0.75" (D)

DX3336-062 dimensional drawing

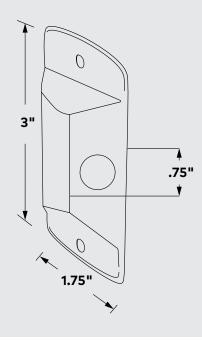

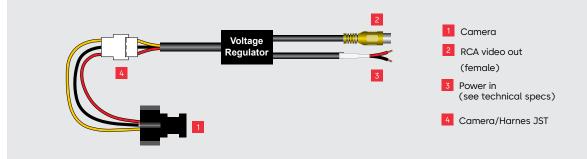

© dormakaba 2024 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation.

Any questions? We would be happy to advise you. Contact us at: 1-800-265-6630