

# D900 Grade 1 Small Case Mortise Dead Bolts



# Grade 1 Small Case Mortise Dead Bolts

## D900 Series

3 Technical Details/Specifications

## How to Order

4 Locks

5 Keyways

## Functions

6 Available Functions

## Lock Options


7 Strikes

7 Occupancy Indicators

dormakaba USA quality and environmental management systems in Reamstown/Leola, PA and Steeleville, IL are certified to ISO 9001:2015 and ISO 14001:2015.



# D900 Series

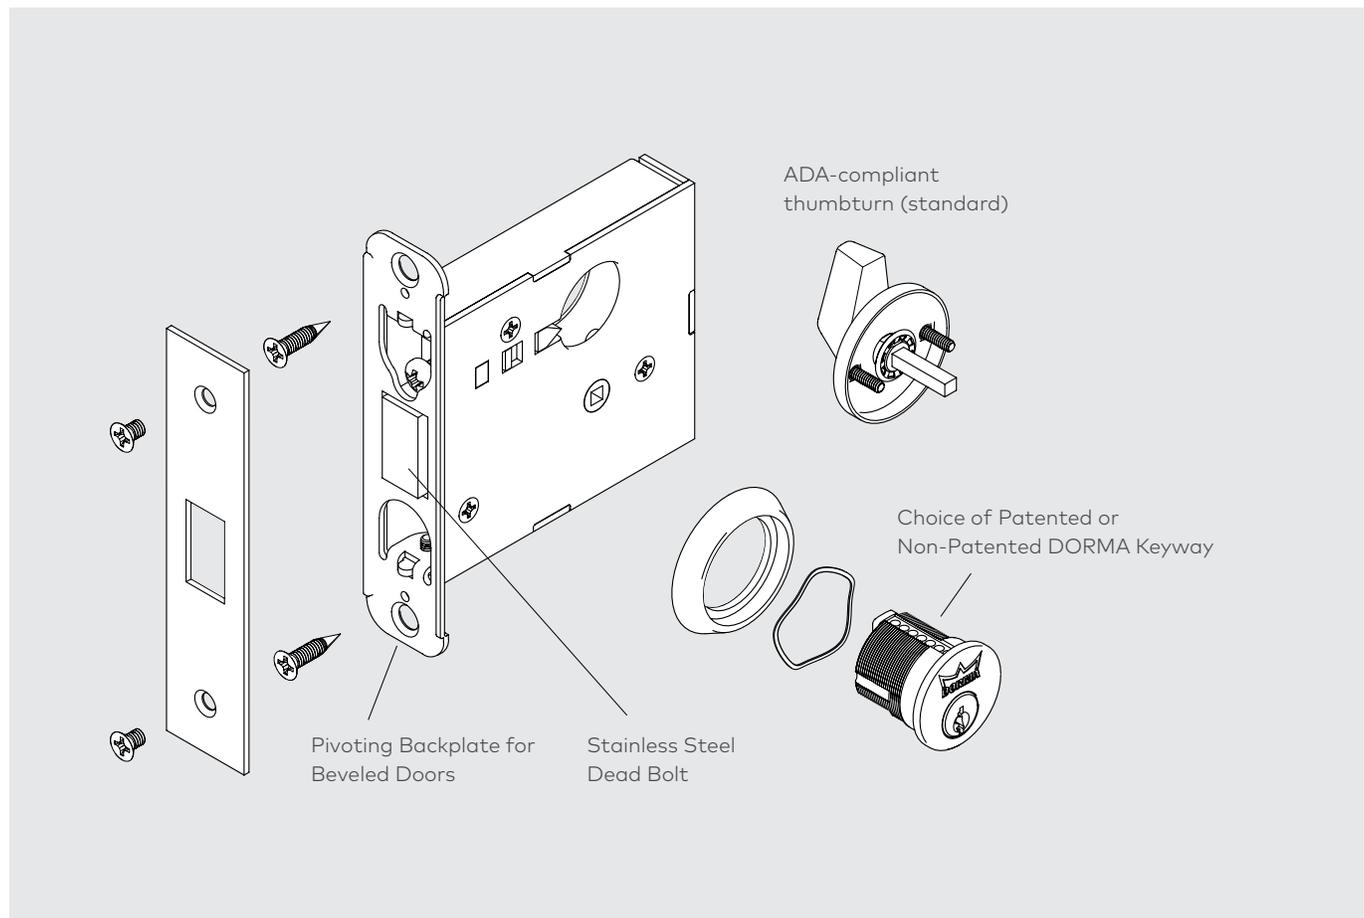

The D900 is a small case mortise dead bolt for use in heavy duty commercial environments such as schools, hospitals, and office buildings.

Typical applications are storage room doors, locker room doors, rest room doors, or any application where latching is not required.

The D900 can be used as a primary lock, or as an auxiliary lock.

### Technical Details

- Standard door thickness 1-3/4"–2-1/4" thicker doors by special request.
- 2-3/4" backset.
- 1-1/8" x 5-9/16" faceplate.
- 1-1/8" x 3-1/2" no lip dead bolt strike.
- 1" throw, stainless steel bolt.
- Non-handed (field reversible).

### Certifications

- ANSI/BHMA A156.36 Grade 1 certified.
- UL listed 3 hour fire rated. Locks are listed for A label and lesser class doors.
- Fire rated by itself or as



auxiliary latching device.

### Cylinders and Keying

- Unless otherwise specified, cylinders will be provided in SC keyway with two (2) nickel silver keys.
- Optional patented key system available.

### Finishes

- Brass: 605 PVD (Bright) or 606 PVD (Satin)
- Bronze: 612 PVD (Satin) or 613 PVD (Dark Oxidized Satin)
- Nickel: 619 PVD (Satin)
- Chrome: 625 (Bright) or 626 (Satin)
- Stainless: 629 (Bright) or 630 (Satin)

### Warranty

For details, refer to **Limited Warranty** on our website at [go.dormakaba.com/Terms-DA](http://go.dormakaba.com/Terms-DA)

## How to order D900 Series locks

| Function             |     | Antimicrobial Coating |    | Security Screws |  | Strike Options |  | See Next Page for Keying Options |  |
|----------------------|-----|-----------------------|----|-----------------|--|----------------|--|----------------------------------|--|
| Turn Only            | 81  | AM                    | TX |                 |  |                |  |                                  |  |
| Indicator x Turn     | 71  |                       |    |                 |  |                |  |                                  |  |
| Cylinder x Classroom | 63* |                       |    |                 |  |                |  |                                  |  |
| Cylinder x Cylinder  | 62  |                       |    |                 |  |                |  |                                  |  |
| Cylinder x Blank     | 61  |                       |    |                 |  |                |  |                                  |  |
| Cylinder x Turn      | 60  |                       |    |                 |  |                |  |                                  |  |

| Product Family                       | Finish          | Handing (D963 only) | Door Thickness  | Cylinder Type |
|--------------------------------------|-----------------|---------------------|-----------------|---------------|
| Grade 1 Small Case Mortise Dead Bolt | Satin Stainless | RH                  | 134             | T             |
|                                      | Satin Chrome    | LH                  | 1-3/4" - 2-1/4" | J             |
|                                      | Bright Chrome   |                     |                 | C             |
|                                      | Satin Black     |                     |                 | L             |
|                                      | Satin Nickel    |                     |                 | D             |
|                                      | Dark Oxidized   |                     |                 | G             |
|                                      | Satin Bronze    |                     |                 | R             |
|                                      | Satin Bronze    |                     |                 | F             |
|                                      | Satin Brass     |                     |                 |               |
|                                      | Bright Brass    |                     |                 |               |

**Product Family**: D9

**Finish**: 60, 626, 625, 622 PVD, 619 PVD, 613 PVD, 612 PVD, 606 PVD, 605 PVD


**Handing (D963 only)**: RH (Right Hand/Right Hand Reverse), LH (Left Hand/Left Hand Reverse)

**Door Thickness**: 134





**Cylinder Type**: T (Temporary SFIC), J (SFIC (Less Core)), C (SFIC), L (Less Cylinder), D (Conventional Cylinder), G (Temporary Schlage LFIC), R (Schlage LFIC (Less Core)), F (Schlage LFIC)

\* D963 function available in 613, 619, 626 and 630 finish only.

## How to order Keyways

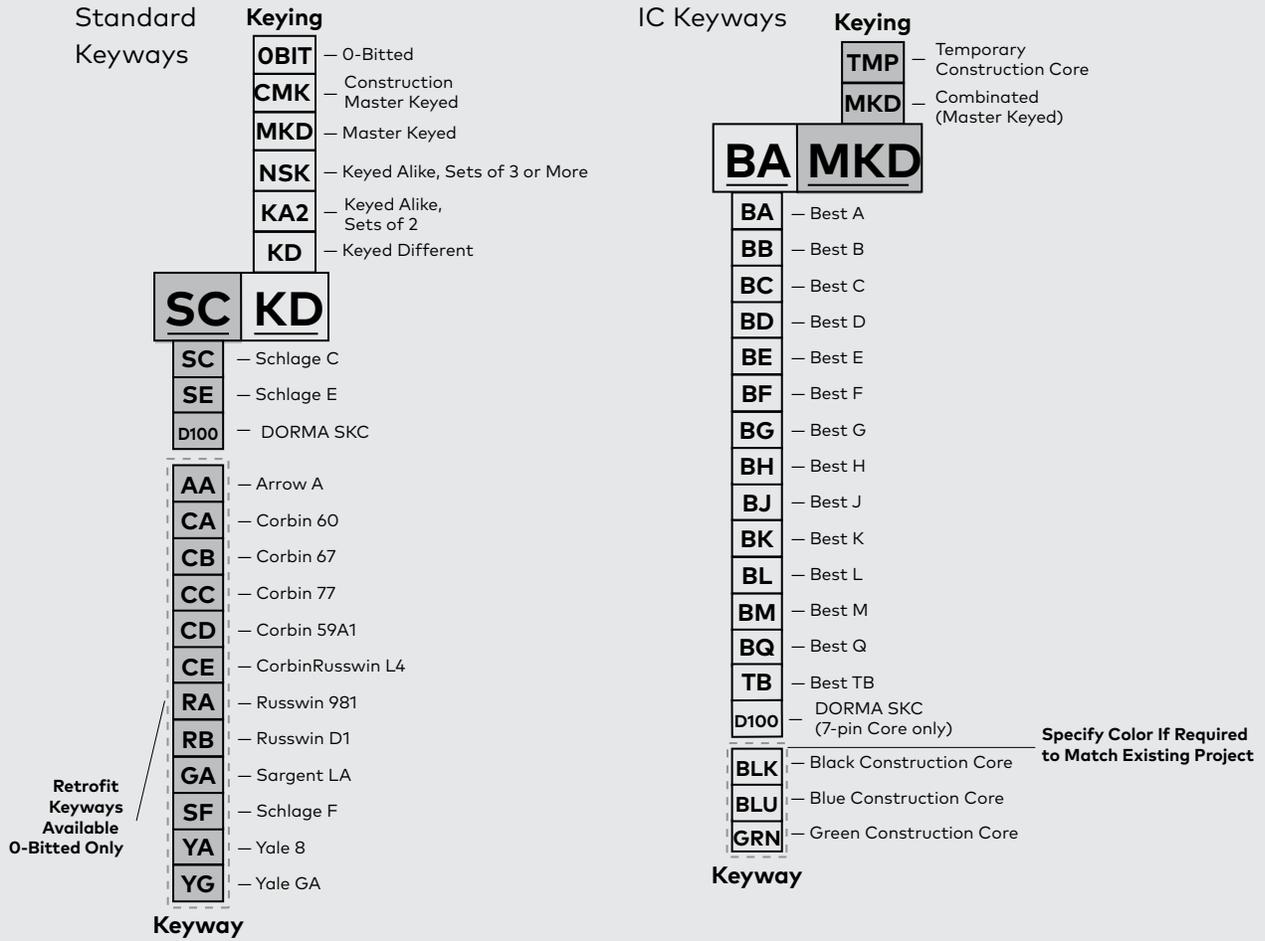


# Functions

| Function                  | Series | Outside/Inside   | Description  |
|---------------------------|--------|--|--|
| Cylinder × Turn           | D960   | <br><b>E06071</b>   | <ul style="list-style-type: none"> <li>• Dead bolt operated by key outside or by turn inside.</li> </ul>   |
| Cylinder × Blank          | D961   | <br><b>E06081</b>   | <ul style="list-style-type: none"> <li>• Dead bolt operated by key outside only.</li> </ul>  |
| Cylinder × Cylinder       | D962   | <br><b>E06061</b>   | <ul style="list-style-type: none"> <li>• Dead bolt operated by key either side.</li> </ul>   |
| Cylinder × Classroom      | D963   | <br><b>E06091</b>  | <ul style="list-style-type: none"> <li>• Dead bolt operated by key outside.</li> <li>• Turn inside retracts but does not project dead bolt.</li> <li>• Available finishes—613, 619, 626, and 630.</li> </ul> |
| Cylinder Indicator × Turn | D971   | <br><b>E06181</b> | <ul style="list-style-type: none"> <li>• Dead bolt operated by key outside or by turn inside.</li> <li>• Indicator (included) message reads occupied/vacant or secured/unsecured.</li> </ul>                 |
| Turn Only                 | D981   | <br><b>E06181</b> | <ul style="list-style-type: none"> <li>• Dead bolt operated by turn inside.</li> </ul>   |

# Lock Options

## Strike

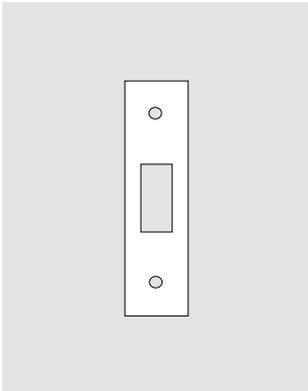


**5301** — 1-1/8" x 3-1/2" square corner strike — no lip deadbolt.


## Occupancy Indicators




**79024\*** — Indicator used with cylinder, reading OCCUPIED/VACANT or SECURED UNSECURED. Both readings supplied.



**79020** — Indicator used without cylinder, emergency access, reading OCCUPIED/VACANT.



**79021** — Indicator used without cylinder, reading SECURED/UNSECURED. No emergency access.



**79022** — Indicator with coiturn used without cylinder, reading OCCUPIED/VACANT.

### NOTES:

- Occupancy indicators are for use on 1-3/4"-2-1/8" thick doors. Consult factory for thicker door applications.

\* Included with D971 function.

dormakaba USA, Inc.  
6161 E. 75th St.  
Indianapolis, IN 46250  
800.523.8483  
[www.dormakaba.us](http://www.dormakaba.us)

[www.dormakaba.us](http://www.dormakaba.us)

