



HSD-L08

Half-height swing doors


Standard units	HSD-L08
Construction	
Tubular column	Made of AISI 304 stainless steel, \varnothing 2-3/8" (\varnothing 60) with emergency exit function.
Barrier element	Multi-layer panel with opening for children.
Leaf radius	38-9/16" (980)
Leaf upper edge	49-3/16" (1250)
Finish	Stainless steel satin finish.
Function	Type 0: Manual operation. Mechanically free in both directions. 90° opening in entrance and exit directions. When the swing door is opened, an acoustic signal sounds. Manual motion from the zero position with a force of 90 Nm on the front door leaf end.
Installation	Dowelled on finished floor level, FFL. Not suitable for outdoor installation.

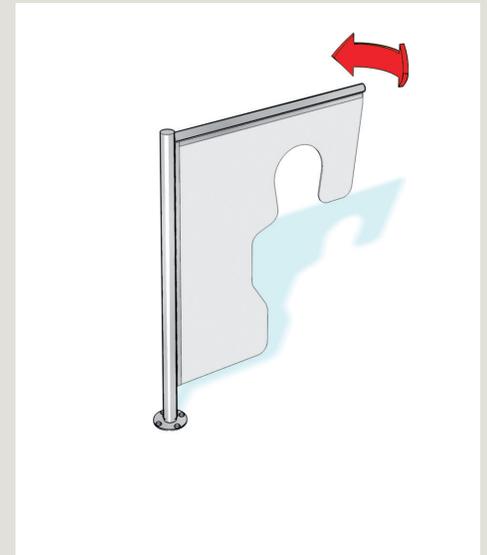


Installation alternatives



Dowelled on finished floor (standard)



With mounting plate on subfloor level




Cast-in in finished floor level

Note

Dimensions shown as inches followed by millimeters; for example, 1" (25).

Elevation drawing



HSD-L08

HSD-L08 option

Construction

Special leaf width: minimum 25-9/16" (650).