


HSD-L07

Half-height swing doors


Standard units	HSD-L07
Construction	
Tubular column	Made of AISI 304 stainless steel, \varnothing 5-1/2" (\varnothing 140).
Barrier element	U-shaped, made of tubular AISI 304 stainless steel, \varnothing 1-9/16" (\varnothing 40).
Leaf radius	37-13/16" (960)
Leaf upper edge	35-7/16" (900)
Finish	Stainless steel satin finish.
Function	Type 0: Manual operation. 90° mechanical opening in one direction/opposite direction blocked. Locking with electric door opener (in stainless steel post, \varnothing 2-3/8" [\varnothing 60]), incl. door check and anti-lift security to prevent opening.
Electrical equipment	24 V DC power supply for electrical door opener supplied by the customer, on-site control.
Installation	Dowelled on finished floor level, FFL. Not suitable for outdoor installation.




Installation alternatives



Dowelled on finished floor (standard)



With mounting plate on subfloor level




Cast-in in finished floor level

Note

Dimensions shown as inches followed by millimeters; for example, 1" (25).

Elevation drawing

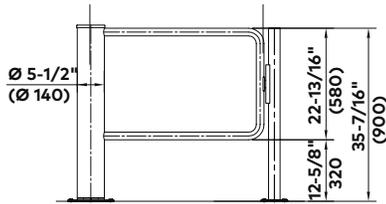

HSD-L07

HSD-L07 options

Construction

Passage width 39-3/8" (1000).

Passage width:
min. 25-9/16" (650), max. 47-1/4" (1200).

Special leaf width: minimum 25-9/16" (650).

Door leaf panel in TSG (sealed at the top and bottom).

Special height:
Door leaf raised to max. 47-1/4" (1200), 55-1/8" (1400).

Installation

Mounting plate with variable substructure, measure X = 3-1/8" – 7-1/16" (80 – 180).

Cast-in with floor element.