

Gateway II

Electronic Access Control Systems



Driving Hotel Connectivity

The Gateway II facilitates the interface between a hotel's Property Management System (PMS) and the Front Desk Units (FDU). It processes incoming requests from the PMS (in the Kaba indirect protocol) and forwards them to a selected FDU for keycard encoding. Guest information is therefore only entered once (in the PMS) reducing the chance of data entry error and speeding up the check-in process.

The Gateway II is small enough to fit under the hotel Front Desk. Cabling costs are minimalized. For applications needing more than 8 serial ports, devices will be daisy-chained together.

The Gateway II is user friendly and easy to install and configure:

- All options can be configured using the built-in LCD and function keys
- Run time status display
- Complete audit trail
- Built-in serial loop back and FDU communication tests
- Simple software upgrade and rollback
- LAN or serial PMS interfaces
- Interfaces to all major PMS packages

Front View



Rear View





KABA[®]



System Features

Compatibility	Backward compatibility with FDC version 5.0 or higher. Interfaces to all major PMS packages
Capacity	Supports up to 24 simultaneous FDU connections without any perceivable processing delay
Environmental	Room temperature between 32° and 104° F (0° and 40° C) Room relative humidity between 10 and 95 % (non-condensing)
Certification	FCC class A limit, CE class A, UL
Hardware	LAN: 10/100M auto-sensing x 2 Serial Ports: 8 RS-232/422/485 ports Keypad: 5 buttons Power Input: 12-48 VDC Power Consumption: UC-7420: 12W Dimensions: W: 197mm D: 125mm H: 44 mm LCM Display: W: 52mm H: 32 mm

Appearance & Connectivity

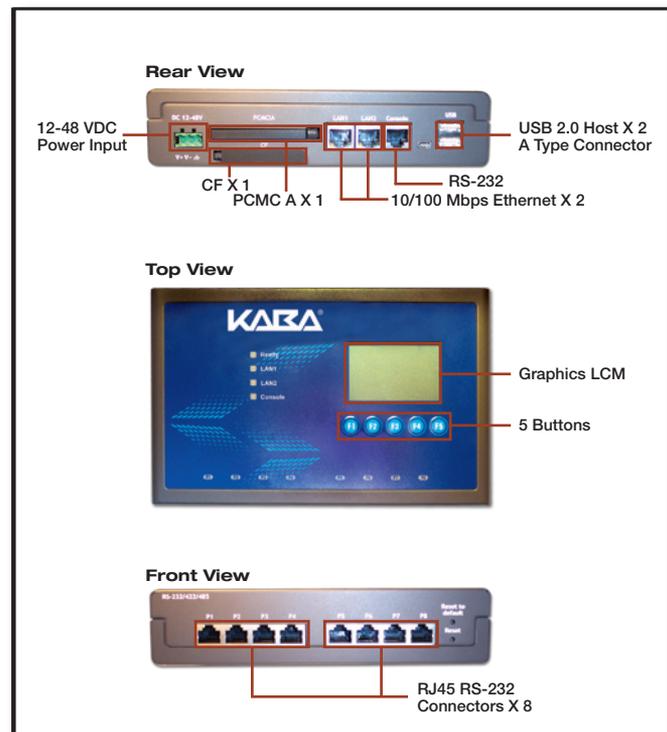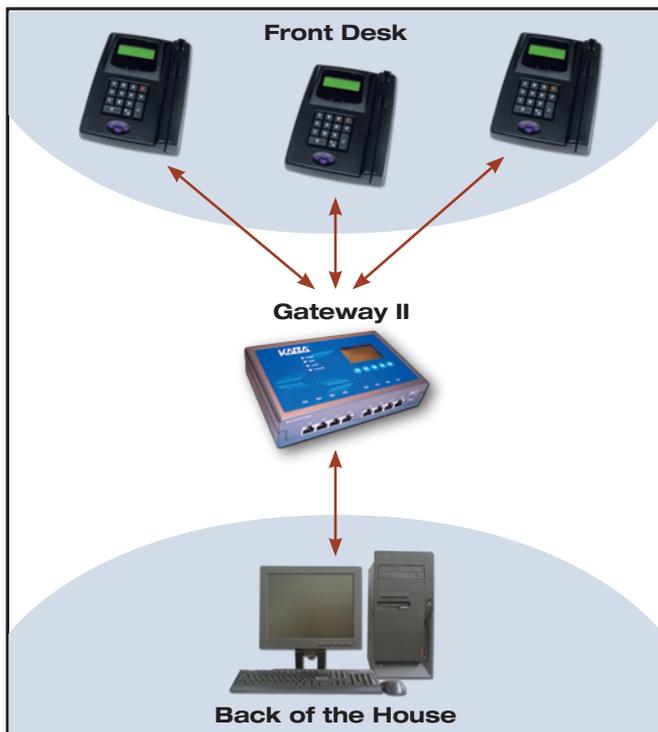

Contact Information
US & Canada
T.: 1.877.468.3555
E.: info@kim.kaba.com
www.kabalodging.com

