



# Series 300 / 200

Mortice locks  
for timber doors



Figure: DORMA lock series 300  
DORMA lever handle PREMIUM 8906

## Contents

	Page
<b>Mortice locks 300/200</b>	
Benefits / Features	3
<b>Mortice locks 300/200</b>	
Classification EN 12209 / Lock details	4
<b>Mortice locks 300/200</b>	
Handing	5
<b>Mortice locks 300/200</b>	
Application	5
<b>Mortice locks 300/200</b>	
Summary	6
<b>Mortice locks 300 CE</b>	
Premier	8
<b>Mortice locks 300</b>	
Project	16
<b>Mortice locks 200 CE</b>	
Contract	20
<b>Mortice locks 200</b>	
Standard	25
<b>Strike plates</b>	36
<b>DORMA locks</b>	
Compatibility	37
<b>Specification text</b>	
300 CE, 300, 200 CE, 200	38/39

## DORMA Mortice locks for timber doors – a complete range of high quality products

DORMA locks offer the very highest standard of quality and functional reliability. With the use of high-grade materials, precise production techniques and a comprehensive quality management

system, all DORMA locks meet demanding technical specifications. Additionally, locks conforming to the technical requirements of DIN 18251 and EN 12209 also offer unbeatable ease of use and security features.

Locks from DORMA are also offered as a set. The package contains the Mortice lock with screws and strike plate.

### Further information, specification texts

Additional information, e.g. specification texts, drawings, and installation instructions on many products, can be accessed via electronic media (Internet).

### Benefits at a glance

#### For the architect

- The high quality satin stainless steel surface finish satisfies very high demands with respect to the appearance of the door furniture.

#### For the trade

- The package contains the Mortice lock with screws and strike plate
- Non-handed lock version to reduce storage space
- Identical fixing screws for lock and strike plate simplify material management
- Having been assigned category of use grade 2 and 3 per EN 12209 the

locks can also be reliably installed in buildings subject to heavy pedestrian traffic frequencies

- Optimated processes because DORMA locks and fittings are from one hand
- Not provided for fire-rated doors in Germany
- All the DORMA Mortice locks have following variations:
 

backset	55 mm
	60 mm
	65 mm
	70 mm
	80 mm
forend	20 mm, square
	20 mm, rounded
	24 mm, square
	24 mm, rounded

#### For the installer


- DORMA locks offer their precision by a simple, compatible assembling in standard door cuts.
- DORMA locks have consistently uniform sizes each and are interchangeable, also between each series.
- DORMA locks can be used universally by changing the latch handing, without using a tool.
- DORMA locks achieve a long life because of a robust maintenance-free lock mechanism, even under difficult operating conditions.

- DORMA locks can be commonly used with standard fittings, e.g. standard lever handles, profile cylinders, roses/escutcheons/backplastes etc.
- DORMA locks are subject to strict quality requirements and are tested and certified according to EN 12209. For applications with increased security requirements the locks are tested and certified in accordance with national and international standards.

Features	300 CE Premier	300 Project	200 CE Contract	200 Standard
Grade EN 12209	3	3	2	2
CE	●	–	●	–
DIN 18251-1	●	●	●	●
Door Application for:	Public	Public	Office	Office
Latch handing	Reversible	Reversible	Reversible	Reversible
Latch	Satin stainless steel	Satin stainless steel	Satin stainless steel	Solid metal nickel plated
Follower 8 mm	Clamp	Clamp	Standard	Standard
Follower bearing	Steel bushes	Steel bushes	Formed	Formed
Dead bolt	Satin stainless steel	Satin stainless steel	Satin stainless steel	Solid metal nickel plated
Anti-saw protection	●	●	–	–
Anti-picking shield	●	●	–	–
Fixing holes	Bushed	Bushed	Unbushed	Unbushed
Forend	Screwed	Screwed	Screwed	Screwed
Forend SSS	AISI 316	AISI 316	AISI 304	AISI 304

● yes – no

Lock details

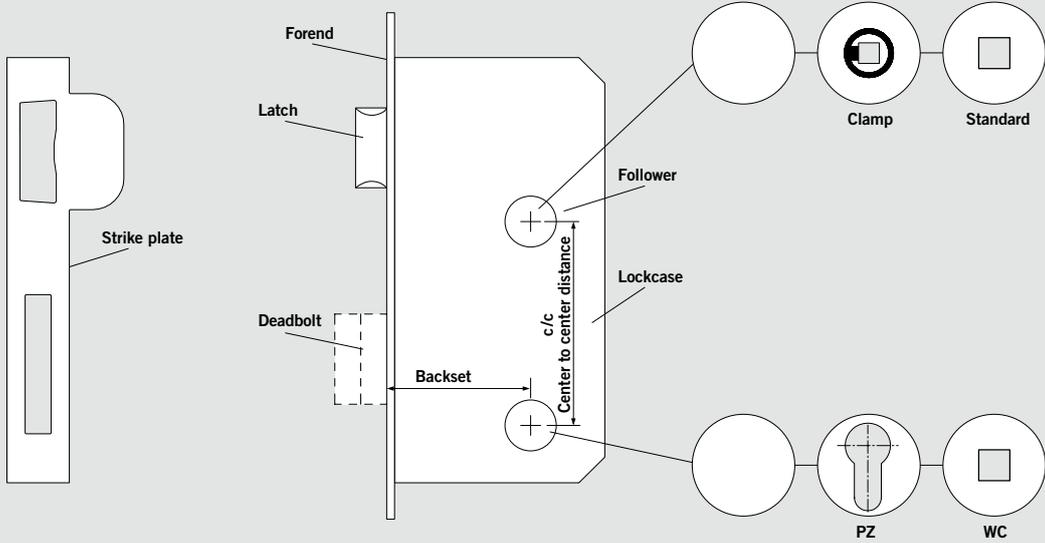


Example Classification code to EN 12209 for the 381 CE lock

<b>Mortice locks 381</b>	<b>3</b>	<b>X</b>	<b>8</b>	<b>1</b>	<b>0</b>	<b>G</b>	<b>4</b>	<b>H</b>	<b>C</b>	<b>2</b>	<b>0</b>
<b>Category of use</b> e.g. doors in public buildings											<b>Key identification</b> no requirement
<b>Durability</b> 200.000 cycl./120 N load on latch bolt											<b>Type of spindle operation</b> for unsprung lever handle
<b>Door Mass</b> above 200 kg, closing force 25 N											<b>Key operation and locking</b> Cylinder manually with intermediate
<b>Fire / smoke doors</b> approved											<b>Door application</b> Hinged door supported
<b>Safety</b> no requirements											<b>Security-drill resistance</b> medium no drill resistance
											<b>Corrosion resistance</b> very high resistance, NSS 120 h, -20 °C to + 80 °C

Example Classification code to EN 12209 for the 271 lock

<b>Mortice locks 271</b>	<b>2</b>	<b>S</b>	<b>8</b>	<b>0</b>	<b>0</b>	<b>G</b>	<b>3</b>	<b>B</b>	<b>C</b>	<b>2</b>	<b>0</b>
<b>Category of use</b> e.g. office doors											<b>Key identification</b> no requirement
<b>Durability</b> 200.000 cycl./50 N load on latch bolt											<b>Type of spindle operation</b> for unsprung lever handle
<b>Door Mass</b> above 200 kg, closing force 25 N											<b>Key operation and locking</b> Cylinder manually with intermediate
<b>Fire / smoke doors</b> not approved											<b>Door application</b> Hinged door
<b>Safety</b> no requirements											<b>Security-drill resistance</b> medium no drill resistance
											<b>Corrosion resistance</b> very high resistance, NSS 120 h, -20 °C to + 80 °C

**Handing data for entrance door sets**

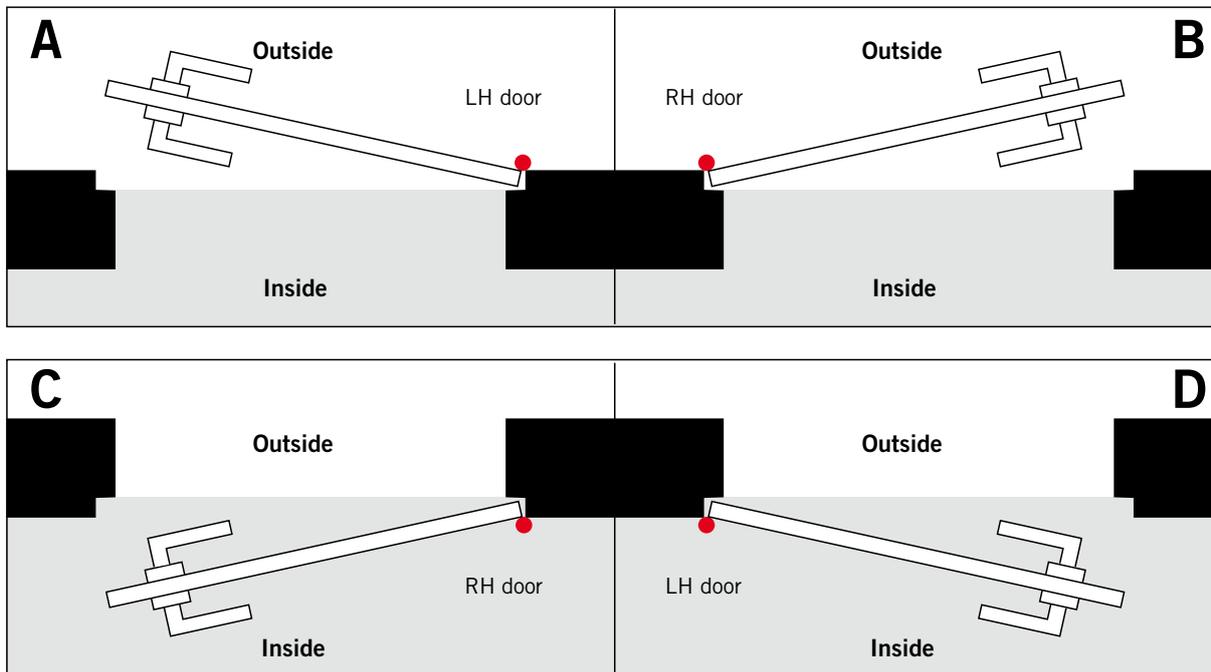

**Application with DORMA Beschlagtechnik lever handles**

DORMA locks are prepared to be used with the DORMA Beschlagtechnik Premium, Plus and Pure ranges.



Premium for Projects with high demands on function and design




Plus for functional doors



Pure for standard doors



**CR  
EA  
TE**





Giving shape to an idea.  
Please do not hesitate to contact us.

PREMIER series 300 CE		381	385	388	389	391	392	393	394
Latch type standard		●	●	–	●	antithrust	antithrust	classroom	●
Latch retractable	by handle	●	●	–	●	●	●	●	●
	by cylinder	●	–	–	–	●	–	–	●
Dead bolt	double throw 20 mm	●	–	●	–	●	–	–	●
	single throw 10 mm	–	●	–	–	–	–	–	–
Dead bolt operable	by cylinder EPC	●	–	●	–	●	–	–	●
	by thumbturn	–	●	–	–	–	–	–	–
Centers	72 mm	●	–	●	●	●	●	●	–
	78 mm	–	●	–	–	–	–	–	–
	85 mm	–	–	–	–	–	–	–	●
Backset		55–80	55–80	55–80	55–80	55–80	55–80	55–60	45
Forend	20 mm rounded / square	● / ●	● / ●	● / ●	● / ●	● / ●	● / ●	● / ●	● / ●
	24 mm rounded / square	● / ●	● / ●	● / ●	● / ●	● / ●	● / ●	● / ●	● / ●
More information on page:		8	9	10	11	12	13	14	15

PROJECT series 300		371	375	378	379
Latch type standard		●	●	–	●
Latch retractable	by handle	●	●	–	●
	by cylinder	●	–	–	–
Dead bolt	double throw 20 mm	●	–	●	–
	single throw 10 mm	–	●	–	–
Dead bolt operable	by cylinder EPC	●	–	●	–
	by thumbturn	–	●	–	–
Centers	72 mm	●	–	●	●
	78 mm	–	●	–	–
Backset		55–80	55–80	55–80	55–80
Forend	20 mm rounded / square	● / ●	● / ●	● / ●	● / ●
	24 mm rounded / square	● / ●	● / ●	● / ●	● / ●
More information on page:		16	17	18	19



● yes – no

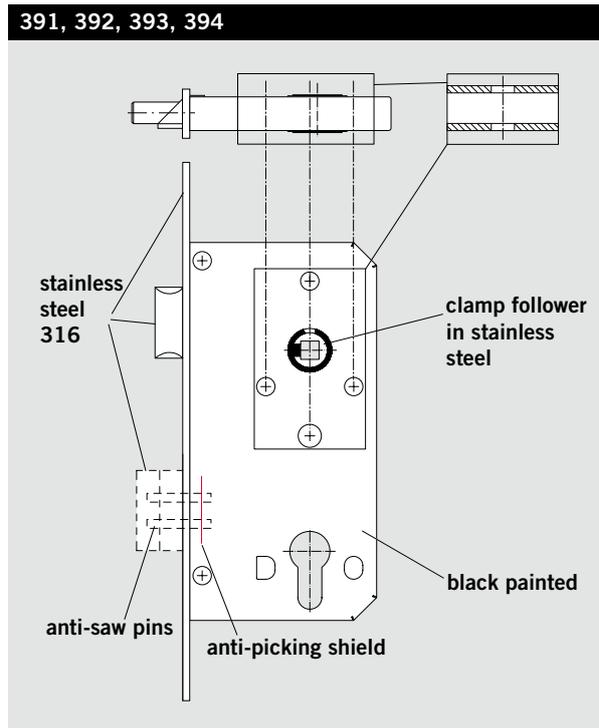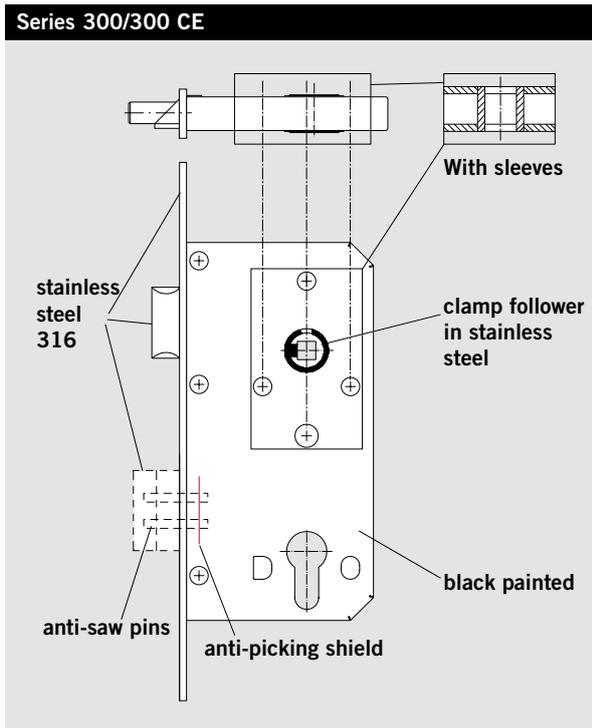

<b>CONTRACT series 200 CE</b>		<b>281</b>	<b>285</b>	<b>288</b>	<b>289</b>	<b>290</b>
Latch type standard		●	●	–	●	●
Latch retractable	by handle	●	●	–	●	●
	by cylinder	●	–	–	–	●
Dead bolt	double throw 20 mm	●	–	●	–	–
	single throw 10 mm	–	●	–	–	–
Dead bolt operable	by cylinder EPC	●	–	●	–	–
	by thumbturn	–	●	–	–	–
Centers	72 mm	●	–	●	●	●
	78 mm	–	●	–	–	–
Backset		55–80	55–80	55–80	55–80	55–80
Forend	20 mm rounded / square	● / ●	● / ●	● / ●	● / ●	● / ●
	24 mm rounded / square	● / ●	● / ●	● / ●	● / ●	● / ●
More information on page:		20	21	22	23	24

<b>STANDARD series 200</b>		<b>271</b>	<b>275</b>	<b>278</b>	<b>279</b>	<b>208</b>	<b>209</b>	<b>232</b>	<b>233</b>	<b>234</b>	<b>235</b>
Latch type standard		●	●	–	●	–	●	roller	–	●	●
Latch retractable	by handle	●	●	–	●	–	●	–	–	●	●
	by cylinder	●	–	–	–	–	–	–	–	–	–
Dead bolt	double throw 20 mm	●	–	●	–	●	–	●	–	–	–
	single throw 10 mm	–	●	–	–	–	–	–	●	–	●
Dead bolt operable	by cylinder EPC	●	–	●	–	●	–	●	–	lockable follower	–
	by thumbturn	–	●	–	–	–	–	–	●	–	●
Centers	72 mm	●	–	●	●	–	–	●	–	●	●
	78 mm	–	●	–	–	–	–	–	●	–	–
	85 mm	–	–	–	–	–	–	–	–	–	–
Backset		55–80	55–80	55–80	55–80	55	55	55–80	55–80	55–80	55–80
Forend	20 mm rounded / square	● / ●	● / ●	● / ●	● / ●	● / ●	● / ●	● / –	● / ●	● / ●	● / ●
	24 mm rounded / square	● / ●	● / ●	● / ●	● / ●	● / ●	● / ●	– / ●	● / ●	● / ●	● / ●
More information on page:		25	26	27	28	29	30	31	32	33	34

● yes – no

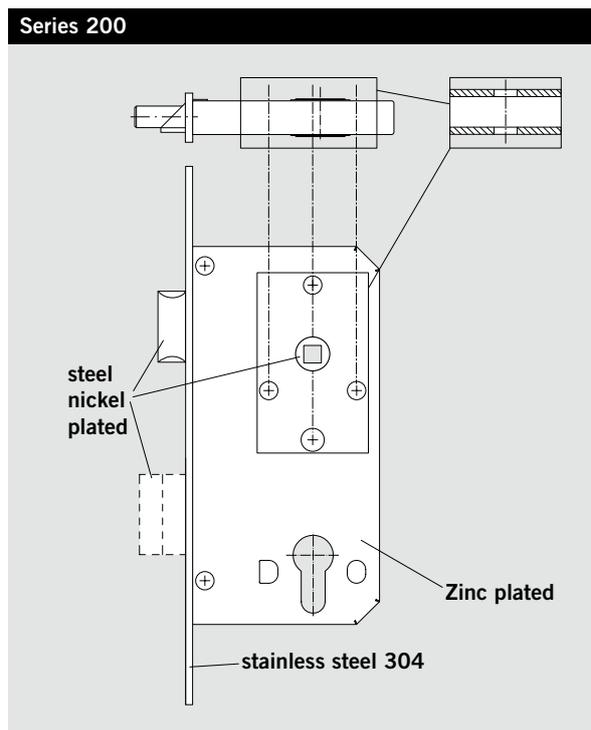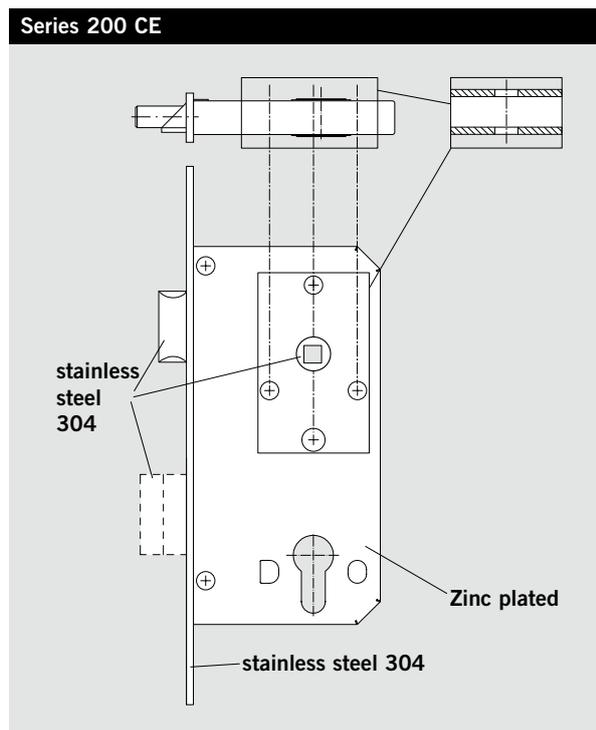

**Mortice lock 381**

Locks for interior and exterior doors, e.g. in public buildings


**Features**

- Grade 3 – EN 12209,
- approved for fire-rated doors with CE certificate
- Lock case size DIN 18251-1, closed case with sleeves, zinc plated, black painted
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- latch handing is reversible
- latch and dead bolt, stainless steel, satin
- Security dead bolt with hardened anti-saw pins, anti-picking shield
- clamp follower, stainless steel, 8 mm square hole, with separate bush bearing
- centred forend, satin stainless steel 1.4401 / AISI 316

**Recommended Strike plate: 20**      **side: non-handed**

**Classification EN 12209**

3	X	8	1	0	G	4	H	C	2	0
---	---	---	---	---	---	---	---	---	---	---

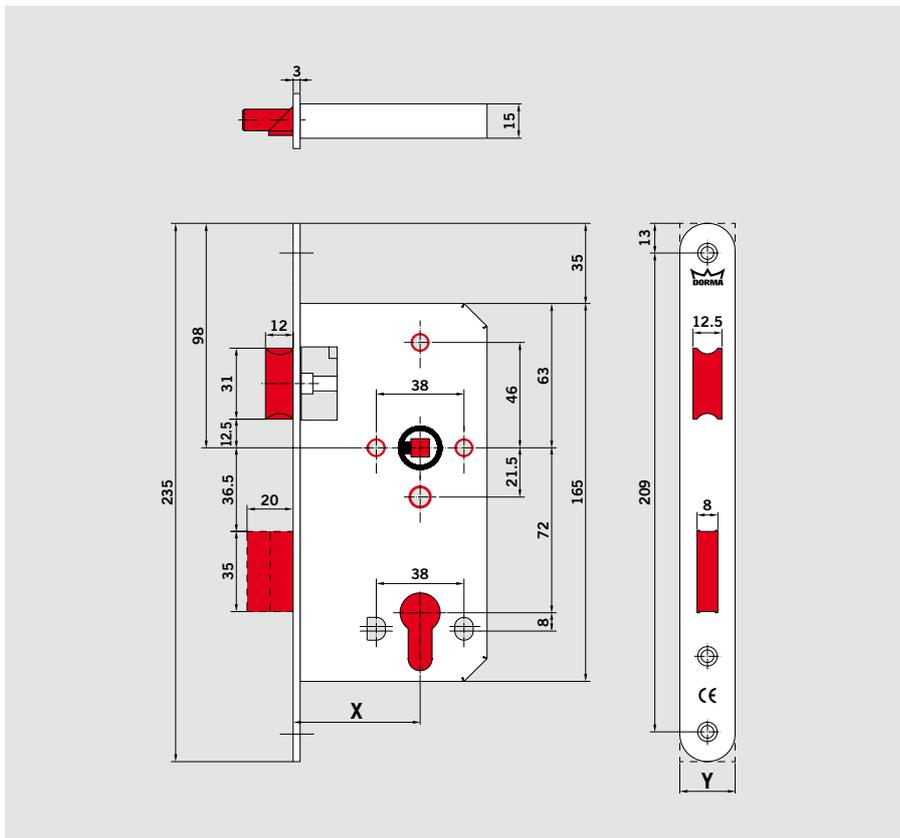

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

## Mortice lock 385

Locks for bathroom doors, e.g. in public buildings


### Features

- Grade 3 – EN 12209,
- approved for fire-rated doors with CE certificate
- Lock case size DIN 18251-1, closed case with sleeves, zinc plated, black painted
- lock case prepared for thumbturn and standard fittings
- latch handing is reversible
- latch and dead bolt, stainless steel, satin
- Security dead bolt with hardened anti-saw pins, anti-picking shield
- clamp follower, stainless steel, 8 mm square hole, with separate bush bearing and 8 mm bathroom follower
- centred forend, satin stainless steel 1.4401 / AISI 316

**Recommended Strike plate: 20**      **side: non-handed**

### Classification EN 12209

3	X	8	1	0	G	4	H	G	2	0
---	---	---	---	---	---	---	---	---	---	---

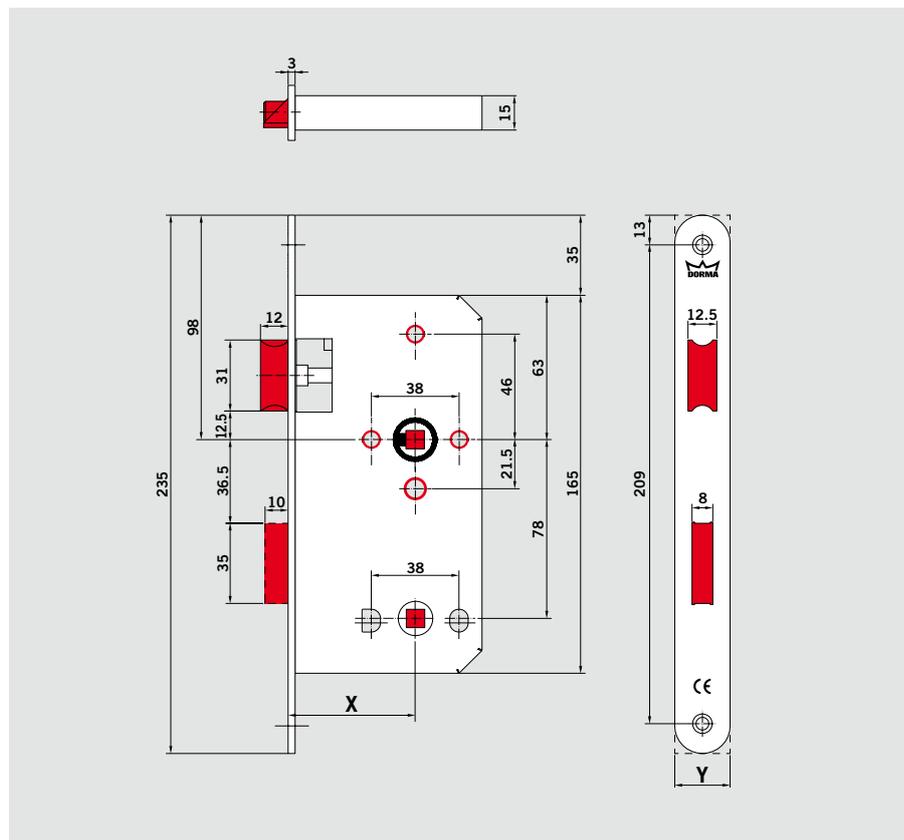

### Possible variation

#### Backset: X

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

#### Dimension of forend: Y

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

**Mortice lock 388**

Locks for interior and exterior doors, e.g. in public buildings


**Features**

- Grade 3 – EN 12209,
- approved for fire-rated doors with CE certificate
- Lock case size DIN 18251-1, closed case with sleeves, zinc plated, black painted
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- dead bolt, stainless steel, satin
- Security dead bolt with hardened anti-saw pins, anti-picking shield
- centred forend, satin stainless steel 1.4401 / AISI 316

**Recommended Strike plate: 21**      side: non-handed

**Classification EN 12209**

3	X	8	1	0	G	4	H	C	2	0
---	---	---	---	---	---	---	---	---	---	---

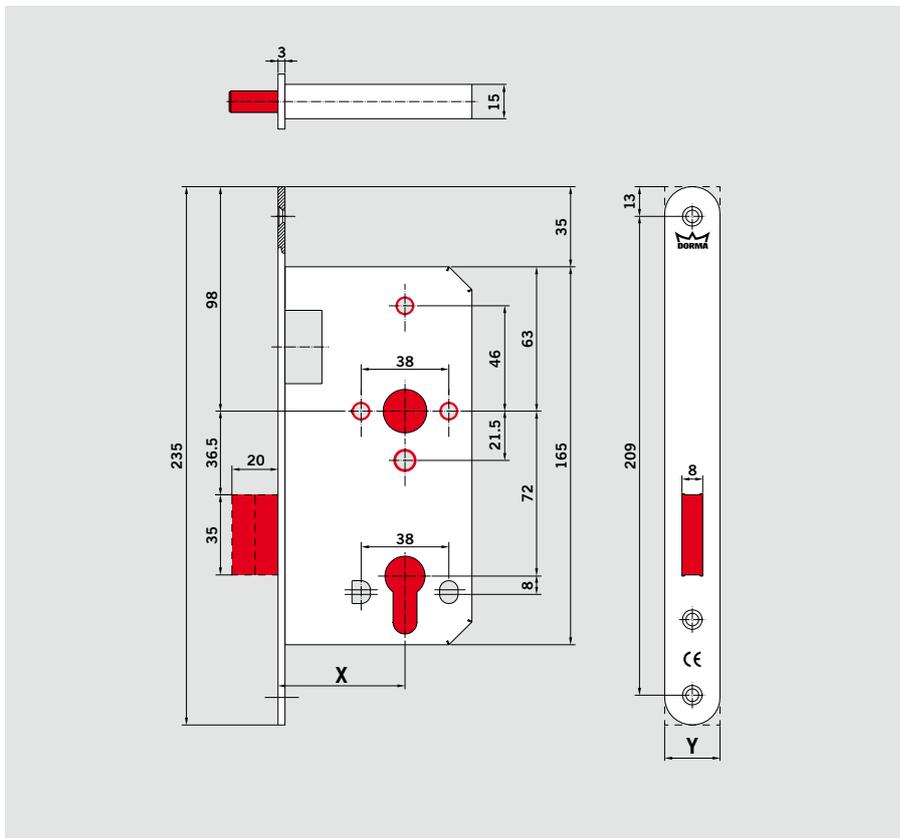

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm

### Mortice lock 389

Locks for interior and exterior doors, e.g. in public buildings


#### Features

- Grade 3 – EN 12209,
- approved for fire-rated doors with CE certificate
- Lock case size DIN 18251-1, closed case with sleeves, zinc plated, black painted
- lock case prepared for standard fittings
- latch handing is reversible
- latch, stainless steel, satin
- clamp follower, stainless steel, 8 mm square hole, with separate bush bearing
- centred forend, satin stainless steel 1.4401 / AISI 316

Recommended Strike plate: 23                  side: non-handed

#### Classification EN 12209

3	X	8	1	0	G	4	H	0	2	0
---	---	---	---	---	---	---	---	---	---	---

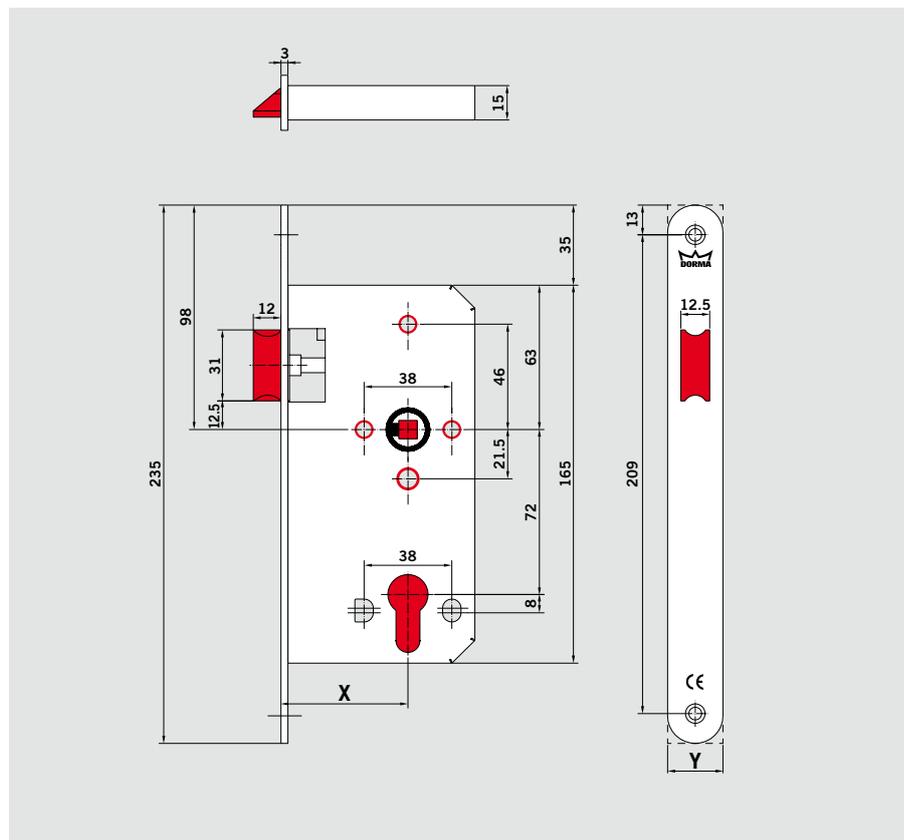

#### Possible variation

##### Backset: X

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

##### Dimension of forend: Y

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

**Mortice lock 391**

Locks for interior and exterior doors, e.g. in public buildings

**Features**

Grade 3 – EN 12209


approved for fire-rated doors with CE certificate

- Lock case size DIN 18251-1, closed case, zinc plated, black painted
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- latch handing is reversible
- anti-thrust latch, with snib
- latch and dead bolt, stainless steel, satin
- Security dead bolt with hardened anti-saw pins, anti-picking shield
- follower, stainless steel, 8 mm square hole, mounted in drawn steel bushes
- centred forend, satin stainless steel 1.4401 / AISI 316

**Recommended Strike plate: 20**      **side: non-handed**

**Classification EN 12209**

3	S	8	1	0	G	3	H	C	2	0
---	---	---	---	---	---	---	---	---	---	---

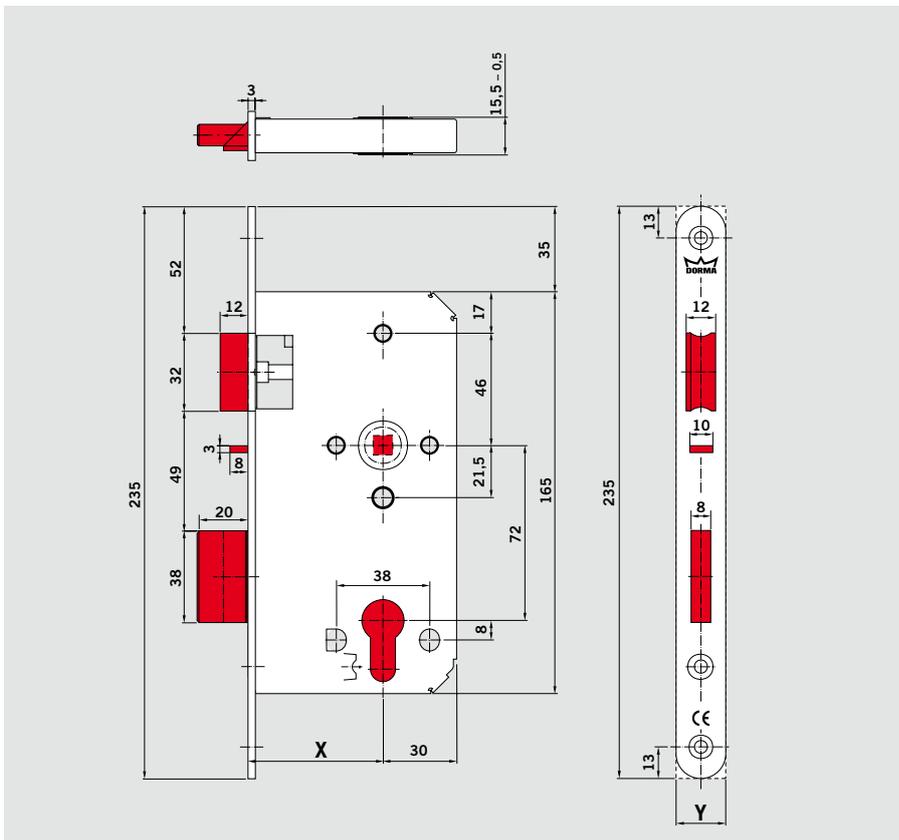

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: X**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

## Mortice lock 392

Locks for interior and exterior doors, e.g. in project buildings

### Features

Grade 3 – EN 12209


approved for fire-rated doors with CE certificate

- Lock case size DIN 18251-1, closed case, zinc plated, black painted
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- latch handing is reversible
- anti-trust latch with snib
- latch, stainless steel, satin
- follower, stainless steel, 8 mm square hole, mounted in drawn steel bushes
- centred forend, satin stainless steel 1.4401 / AISI 316

**Recommended Strike plate: 23**      **side: non-handed**

### Classification EN 12209

3	S	8	1	0	G	3	H	0	2	0
---	---	---	---	---	---	---	---	---	---	---

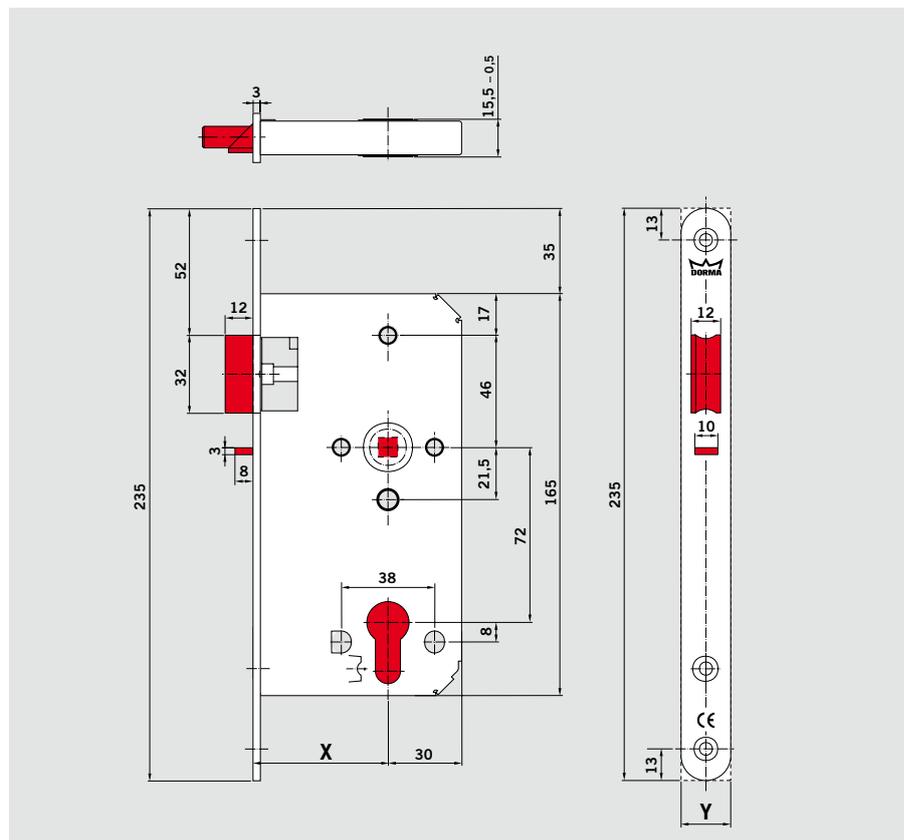

### Possible variation

#### Backset: X

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

#### Dimension of forend: Y

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

**Mortice lock 393**

**Locks for classroom doors**

**Features**

Grade 3 – EN 12209


approved for fire-rated doors with CE certificate

- Lock case size DIN 18251-1, closed case, zinc plated, black painted
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- latch handing is reversible
- anti-trust latch with snib
- latch, stainless steel, satin
- Split follower, stainless steel, 8 mm square hole, mounted in drawn steel bushes, outside follower, lockable by cylinder
- centred forend, satin stainless steel 1.4401 / AISI 316
- delivered with split spindle (8 x 110 mm)

**Recommended Strike plate: 23**      **side: non-handed**

**Classification EN 12209**

3	S	8	1	0	G	3	H	0	2	0
---	---	---	---	---	---	---	---	---	---	---

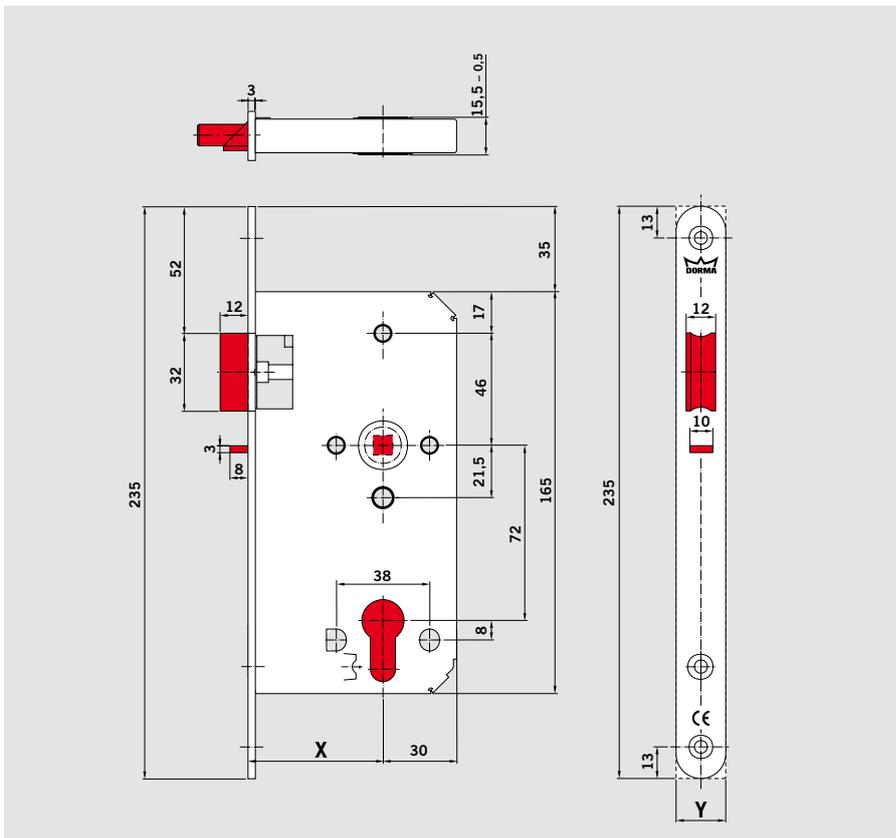

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

### Mortice lock 394

Locks for interior and exterior doors, e.g. in public buildings

#### Features

Grade 3 – EN 12209


approved for fire-rated doors with CE certificate

- Lock case size DIN 18251-1, closed case, zinc plated, black painted
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- latch handing is reversible
- latch and dead bolt, stainless steel, satin
- follower, stainless steel, 8 mm square hole, mounted in drawn steel bushes
- centred forend, satin stainless steel 1.4401 / AISI 316

**Recommended Strike plate: 20**      **side: non-handed**

#### Classification EN 12209

3	X	8	1	0	G	3	H	C	2	0
---	---	---	---	---	---	---	---	---	---	---

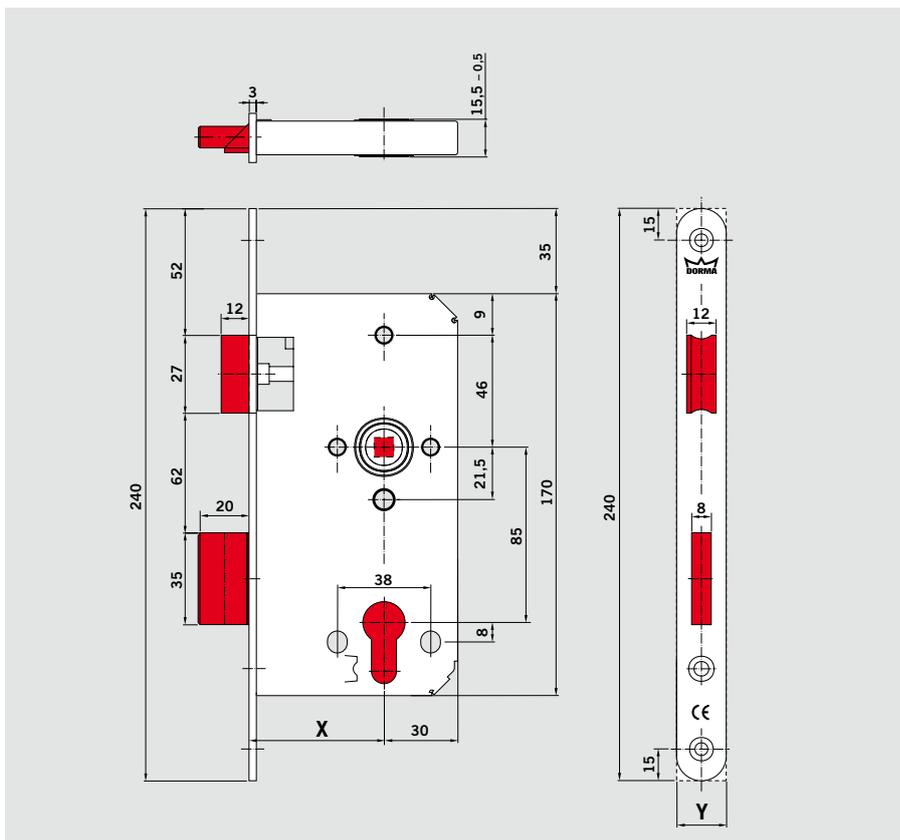

#### Possible variation

**Backset: X**

45 mm

**Dimension of forend: Y**

square 20 mm

24 mm

rounded 20 mm

24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

**Mortice lock 371**

Locks for interior and exterior doors, e.g. in public buildings

**Features**


Grade 3 – EN 12209

- Lock case size DIN 18251-1, closed case with sleeves, zinc plated, black painted
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- latch handing is reversible
- latch and dead bolt, stainless steel, satin
- Security dead bolt with hardened anti-saw pins, anti-picking shield
- clamp follower, stainless steel, 8 mm square hole, with separate bush bearing
- centred forend, satin stainless steel 1.4401 / AISI 316

**Recommended Strike plate: 20**      **side: non-handed**

**Classification EN 12209**

3	X	8	0	0	G	4	H	C	2	0
---	---	---	---	---	---	---	---	---	---	---

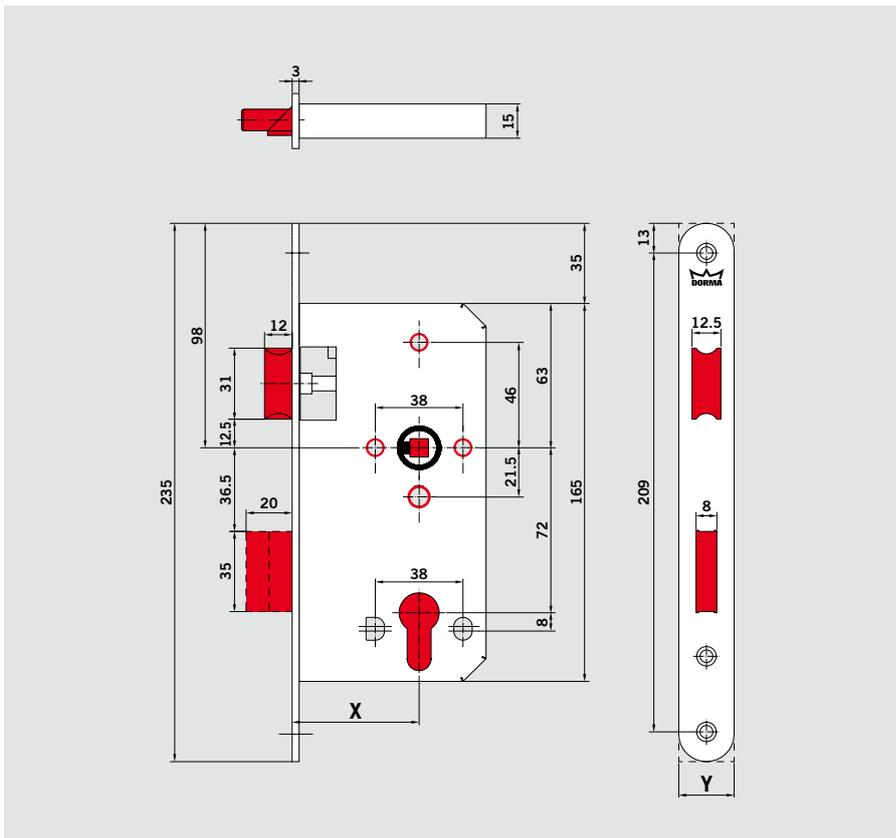

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

## Mortice lock 375

Locks for bathroom doors, e.g. in public buildings

### Features


Grade 3 – EN 12209

- Lock case size DIN 18251-1, closed case with sleeves, zinc plated, black painted
- lock case prepared for thumbturn and standard fittings
- latch handing is reversible
- latch and dead bolt, stainless steel, satin
- Security dead bolt with hardened anti-saw pins, anti-picking shield
- clamp follower, stainless steel, 8 mm square hole, with separate bush bearing, and 8 mm bathroom follower
- centred forend, satin stainless steel 1.4401 / AISI 316

**Recommended Strike plate: 20**      **side: non-handed**

### Classification EN 12209

3	X	8	0	0	G	4	H	G	2	0
---	---	---	---	---	---	---	---	---	---	---

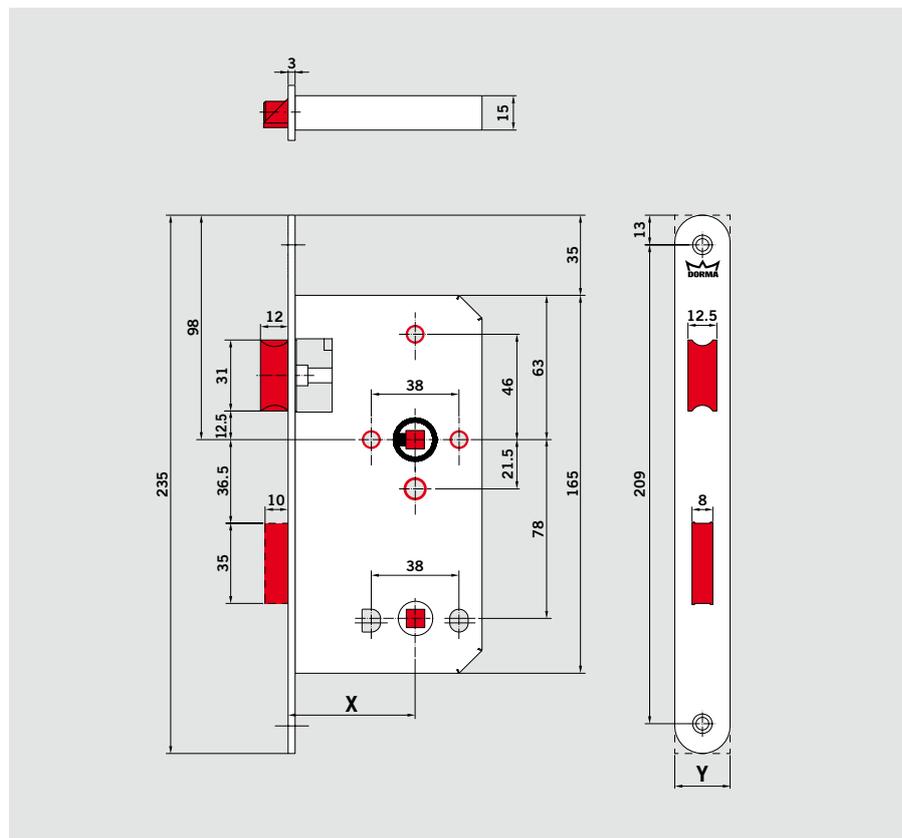

### Possible variation

#### Backset: X

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

#### Dimension of forend: Y

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

**Mortice lock 378**

Locks for interior and exterior doors, e.g. in public buildings

**Features**


Grade 3 – EN 12209

- Lock case size DIN 18251-1, closed case with sleeves, zinc plated, black painted
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- dead bolt, stainless steel, satin
- Security dead bolt with hardened anti-saw pins, anti-picking shield
- centred forend, satin stainless steel 1.4401 / AISI 316

**Recommended Strike plate: 21**      **side: non-handed**

**Classification EN 12209**

3	X	8	0	0	G	4	H	C	0	0
---	---	---	---	---	---	---	---	---	---	---

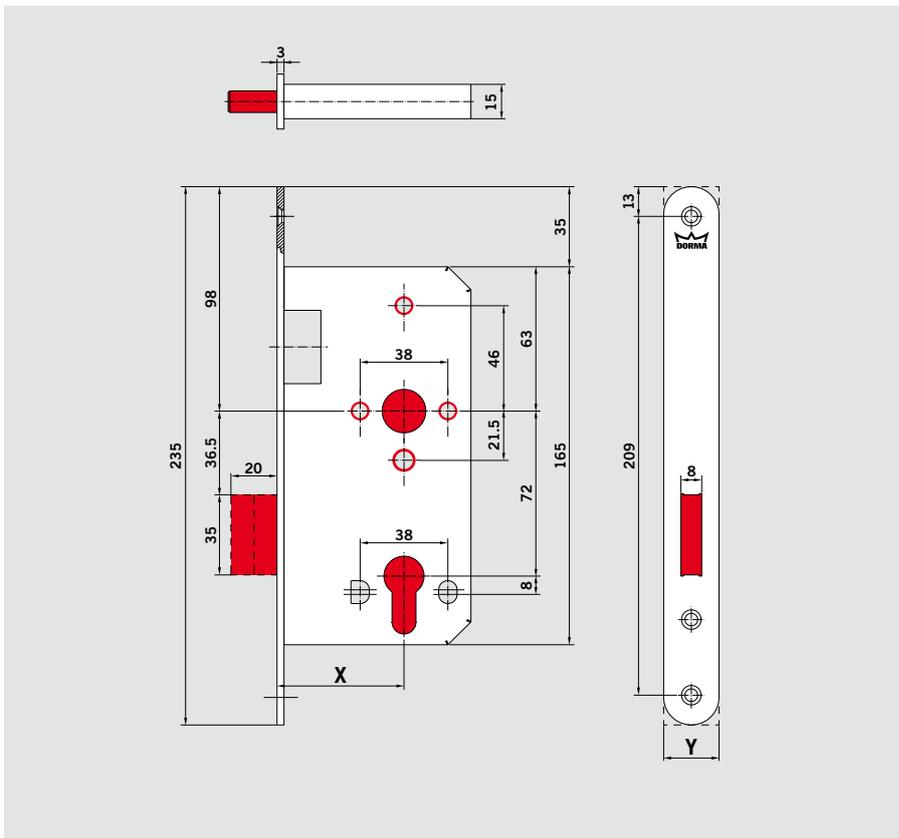

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

## Mortice lock 379

Locks for interior and exterior doors, e.g. in public buildings

### Features

Grade 2 – EN 12209


- Lock case size DIN 18251-1, closed case with sleeves, zinc plated, black painted
- lock case prepared for standard fittings
- latch handing is reversible
- latch, stainless steel, satin
- clamp follower, stainless steel, 8 mm square hole, mounted in drawn steel bushes
- centred forend, satin stainless steel 1.4401 / AISI 316, changeable

Recommended Strike plate: 23                      side: non-handed



### Classification EN 12209

3	X	8	0	0	G	4	H	0	2	0
---	---	---	---	---	---	---	---	---	---	---

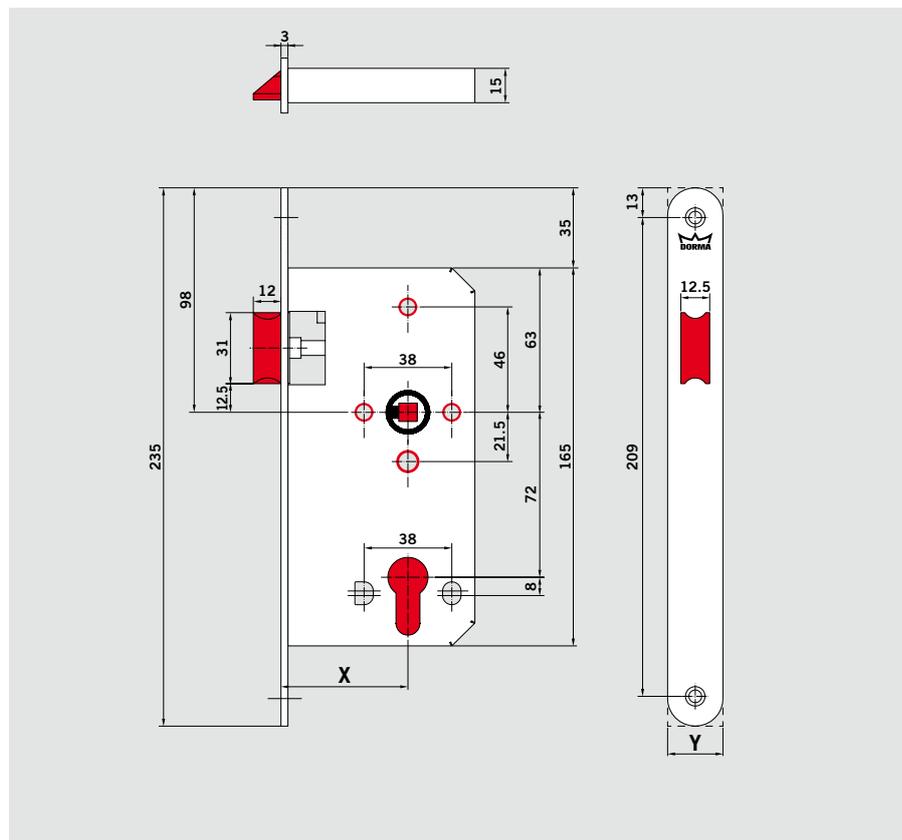

### Possible variation

#### Backset: X

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

#### Dimension of forend: Y

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

## Highlights of the 300 series

	300 CE	300
Category of use Grade EN 12209	3	3
CE	●	-
Lock case size DIN 18251-1	●	●
Door application for	Public	Public
Latch handing	Reversible	Reversible
Latch	Satin stainless steel	Solid metal nickel plated
Follower, 8mm	Clamp	Clamp
Follower bearing	with seperate bush bearing	with seperate bush bearing
Dead bolt	Satin stainless steel	Solid metal nickel plated
Dead bolt operable by Cylinder EPC	●	●
by thumbturn	●	●
Anti-saw protection	●	●
Anti-picking shield	●	●
Fixing holes	Bushed	Bushed
Forend	Screwed	Screwed
Forend SSS	AISI 316	AISI 316

● yes – no

- The high quality satin stainless steel surface finish satisfies very high demands with respect to the appearance of the door furniture.
- The package contains the Mortice lock with screws and strike plate
- Non-handed lock version to reduce storage space
- Identical fixing screws for lock and strike plate simplify material management
- Having been assigned category of use grade 3 per EN 12209 the locks can also be reliably installed in buildings subject to heavy pedestrian traffic frequencies
- Anti-saw protection and anti-picking shield increase the security demands
- All the DORMA Mortice locks have following variations:
  - backset 55 mm
  - 60 mm
  - 65 mm
  - 70 mm\*
  - 80 mm\*
- \*on request
- forend 20 mm, square
- 20 mm, rounded
- 24 mm, square
- 24 mm, rounded
- DORMA locks achieve a long life because of a robust maintenance-free lock mechanism, even under difficult operating conditions.
- DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

**Mortice lock 281**

Locks for interior and exterior doors, e.g. in office buildings

**Features**

Grade 2 – EN 12209



approved for fire-rated doors with CE certificate

- Lock case size DIN 18251-1, closed case, zinc plated
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- latch handing is reversible
- latch and dead bolt, stainless steel, satin
- follower, stainless steel, 8 mm square hole, mounted in drawn steel bushes
- centred forend, satin stainless steel 1.4301 / AISI 304

**Recommended Strike plate: 20**      **side: non-handed**

**Classification EN 12209**

2	S	8	1	0	G	3	H	C	2	0
---	---	---	---	---	---	---	---	---	---	---

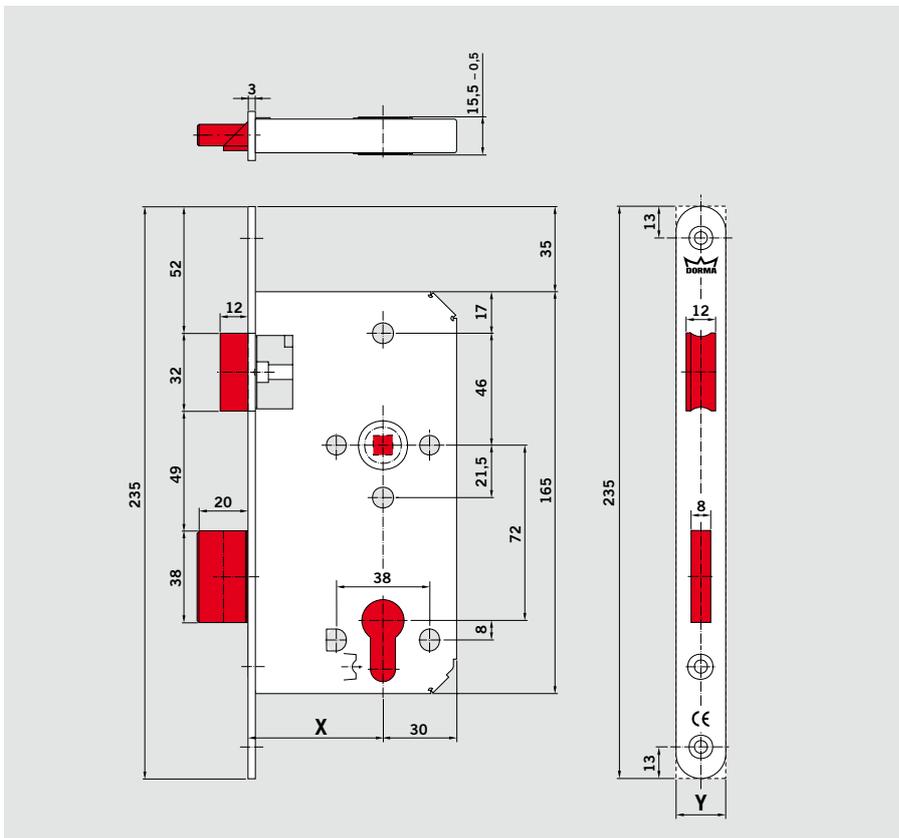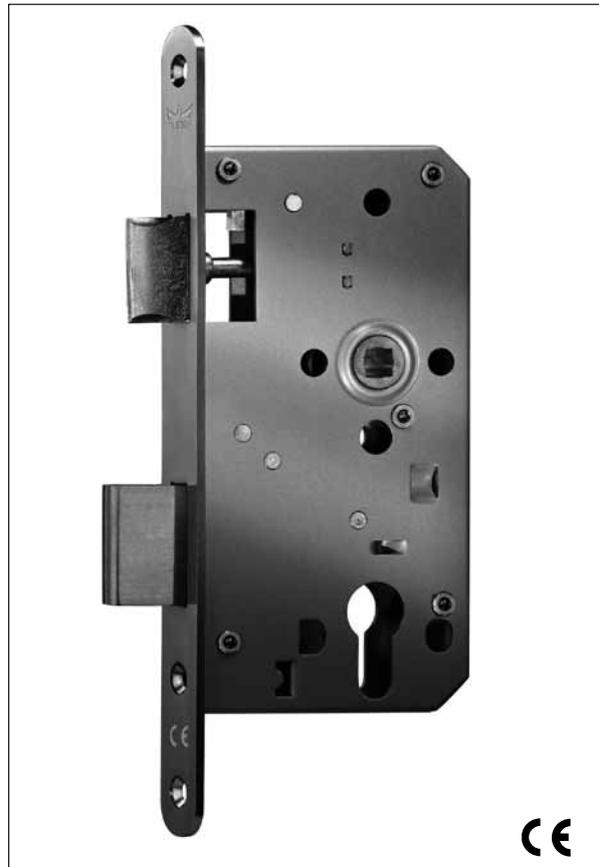

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

**Mortice lock 285**

Locks for bathroom doors, e.g. in office buildings

**Features**

Grade 2 – EN 12209

approved for fire-rated doors with CE certificate

– Lock case size DIN 18251-1, closed case, zinc plated

– lock case prepared for thumbturn

and standard fittings

– latch handing is reversible

– latch and dead bolt, stainless steel, satin

– follower, stainless steel, 8 mm square hole,

mounted in drawn steel bushes and 8 mm bathroom

follower


– centred forend, satin stainless steel 1.4301 / AISI 304

**Recommended Strike plate: 20**

**side: non-handed**

**Classification EN 12209**

2	S	8	1	0	G	3	H	G	2	0
---	---	---	---	---	---	---	---	---	---	---

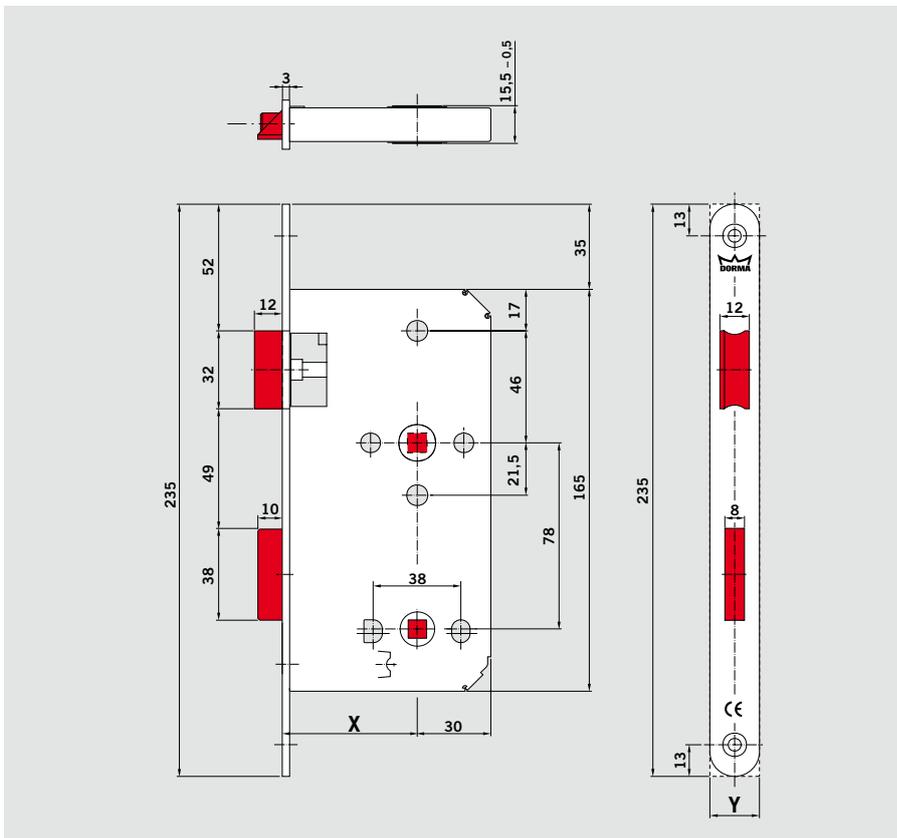

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

## Mortice lock 288

Locks for interior and exterior doors, e.g. in office buildings

### Features

Grade 2 – EN 12209

approved for fire-rated doors with CE certificate

– Lock case size DIN 18251-1, closed case, zinc plated  
– lock case prepared for Euro profile cylinder (DIN18252)  
and standard fittings


– dead bolt, stainless steel, satin

– centred forend, satin stainless steel 1.4301 / AISI 304

**Recommended Strike plate: 21**      **side: non-handed**

### Classification EN 12209

2	S	8	1	0	G	3	H	C	2	0
---	---	---	---	---	---	---	---	---	---	---

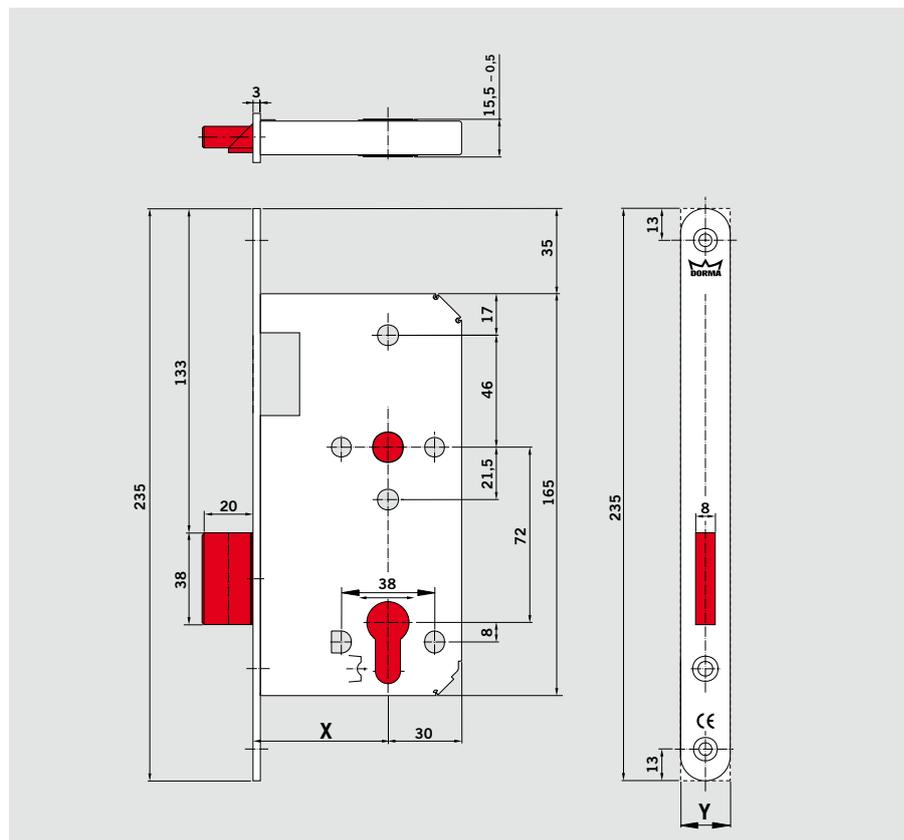

### Possible variation

#### Backset: X

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

#### Dimension of forend: Y

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm

**Mortice lock 289**

Locks for interior and exterior doors, e.g. in office buildings

**Features**

Grade 2 – EN 12209


approved for fire-rated doors with CE certificate

- Lock case size DIN 18251-1, closed case, zinc plated
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- latch handing is reversible
- latch, stainless steel, satin
- follower, stainless steel, 8 mm square hole, mounted in drawn steel bushes
- centred forend, satin stainless steel 1.4301 / AISI 304

**Recommended Strike plate: 23                  side: non-handed**

**Classification EN 12209**

2	S	8	1	0	G	3	H	0	2	0
---	---	---	---	---	---	---	---	---	---	---

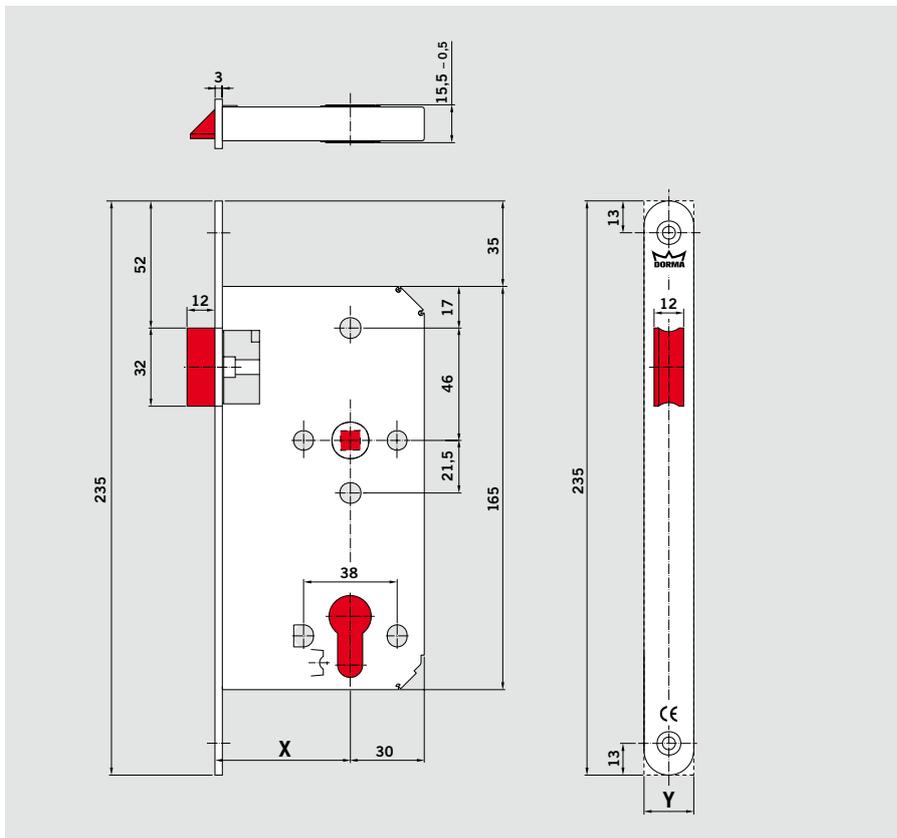

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

## Mortice lock 290

Locks for interior and exterior doors, e.g. in office buildings

### Features

Grade 2 – EN 12209


approved for fire-rated doors with CE certificate

- lock case size DIN 18251-1, closed case, zinc plated
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- latch handing is reversible, with night latch function
- latch, stainless steel, satin
- follower, stainless steel, 8 mm square hole, mounted in drawn steel bushes
- centred forend, satin stainless steel 1.4301 / AISI 304

Recommended Strike plate: **23**      side: non-handed

### Classification EN 12209

2	S	8	1	0	G	3	H	0	2	0
---	---	---	---	---	---	---	---	---	---	---

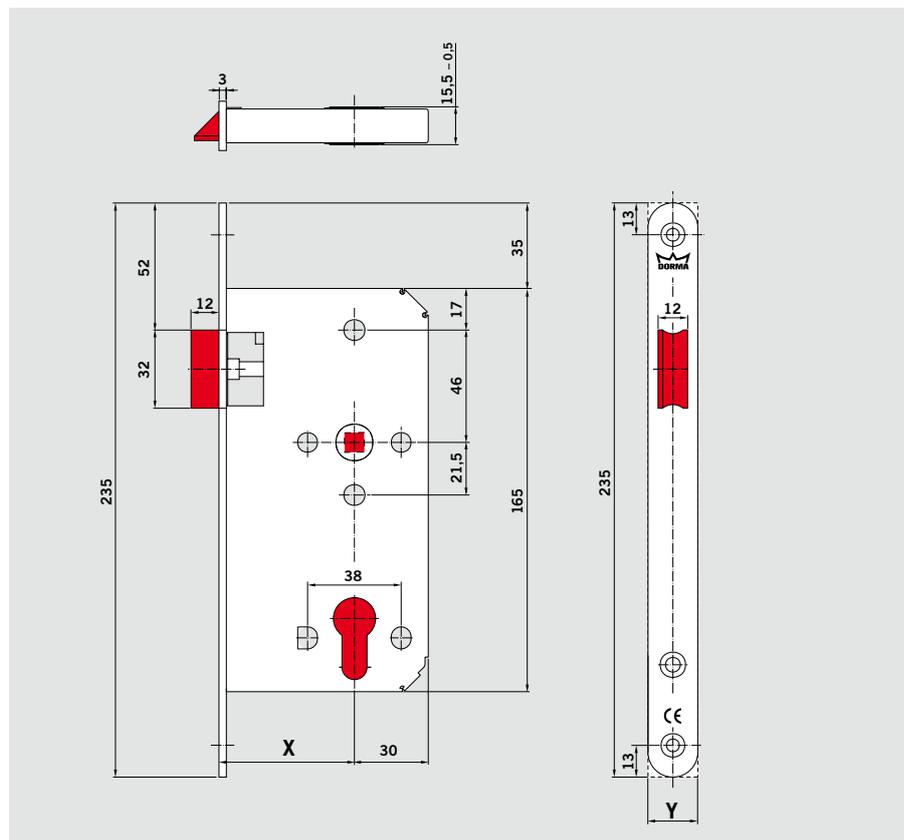

### Possible variation

#### Backset: X

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

#### Dimension of forend: Y

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

**Mortice lock 271**

Locks for interior and exterior doors, e.g. in office buildings

**Features**


Grade 2 – EN 12209

- Lock case size DIN 18251-1, closed case, zinc plated
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- latch handing is reversible
- latch and dead bolt, zinc, nickel plated
- follower, steel blade, 8 mm square hole, mounted in drawn steel bushes
- centred forend, satin stainless steel 1.4301 / AISI 304, changeable

**Recommended Strike plate: 20**      **side: non-handed**

**Classification EN 12209**

2	S	8	0	0	G	3	H	C	2	0
---	---	---	---	---	---	---	---	---	---	---

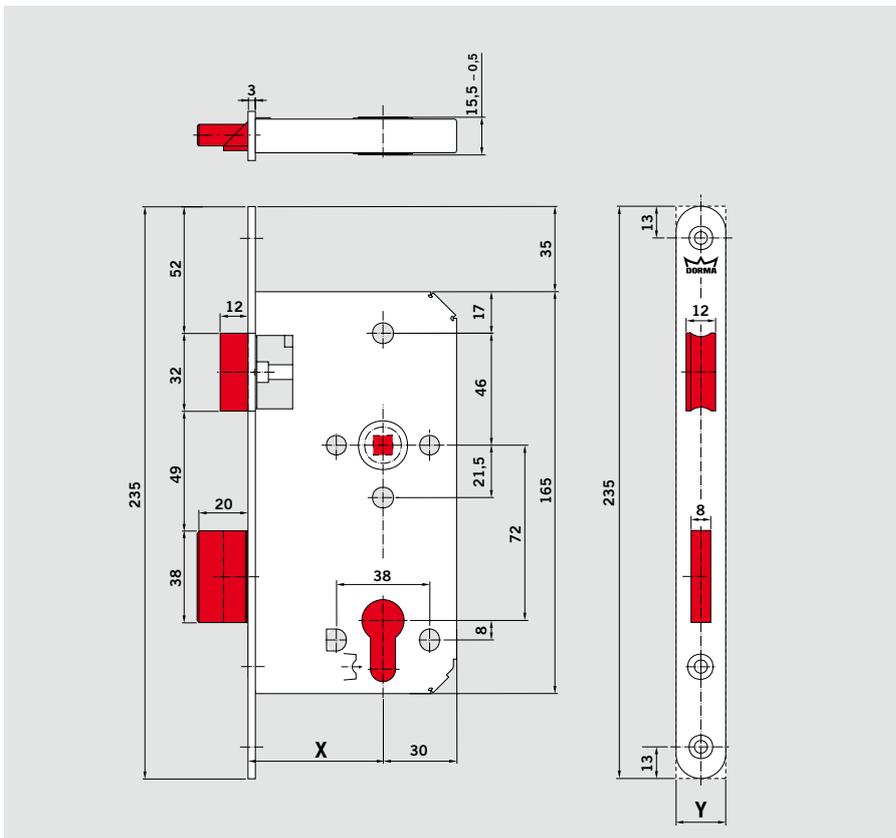

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

## Mortice lock 275

Locks for bathroom doors, e.g. in office buildings

### Features


Grade 2 – EN 12209

- Lock case size DIN 18251-1, closed case, zinc plated
- lock case prepared for thumbturn and standard fittings
- latch handing is reversible
- latch and dead bolt, zinc, nickel plated
- follower, steel blade, 8 mm square hole, mounted in drawn steel bushes and 8 mm bathroom follower
- centred forend, satin stainless steel 1.4301 / AISI 304, changeable

**Recommended Strike plate: 20**      **side: non-handed**

### Classification EN 12209

2	S	8	0	0	G	3	H	G	2	0
---	---	---	---	---	---	---	---	---	---	---

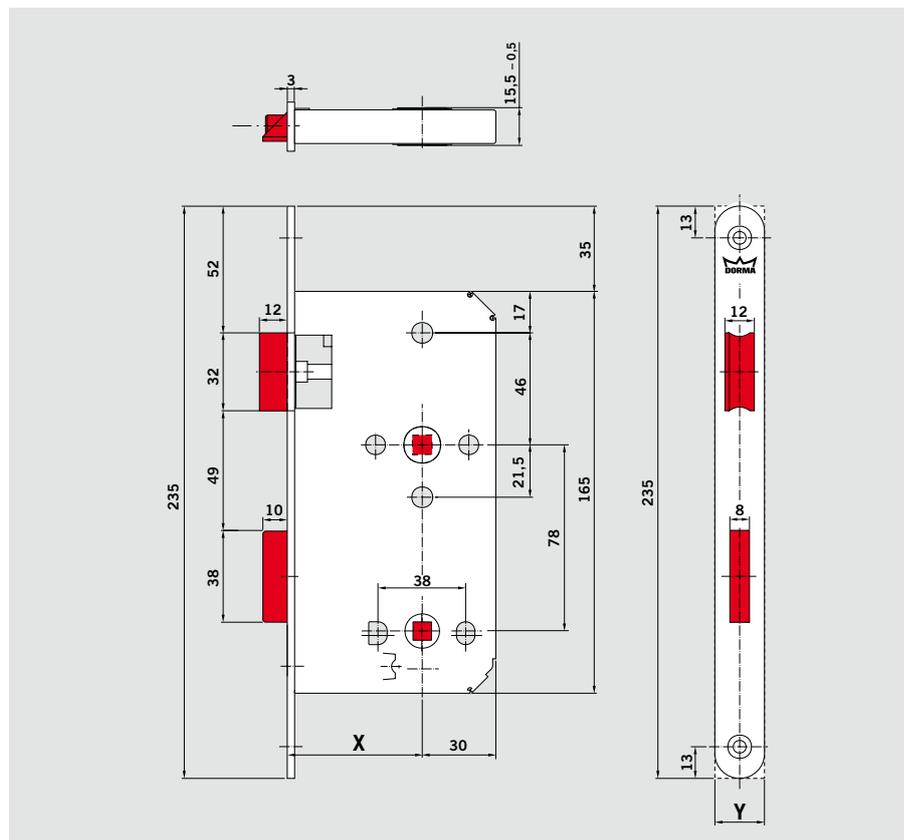

### Possible variation

#### Backset: X

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

#### Dimension of forend: Y

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

**Mortice lock 278**

Locks for interior and exterior doors, e.g. in office buildings

**Features**


Grade 2 – EN 12209

- Lock case size DIN 18251-1, closed case, zinc plated
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- dead bolt, zinc, nickel plated
- centred forend, satin stainless steel 1.4301 / AISI 304, changeable

**Recommended Strike plate: 21**      **side: non-handed**

**Classification EN 12209**

2	S	8	0	0	G	3	H	C	2	0
---	---	---	---	---	---	---	---	---	---	---

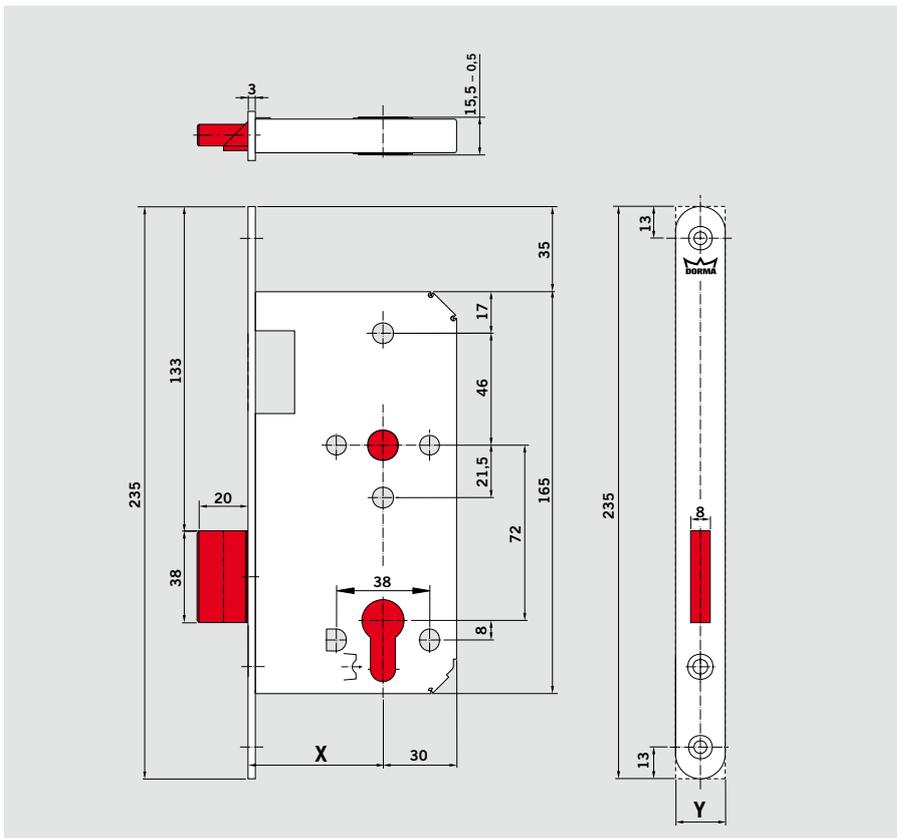

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm

## Mortice lock 279

Locks for interior and exterior doors, e.g. in office buildings

### Features



Grade 2 – EN 12209

- Lock case size DIN 18251-1, closed case, zinc plated
- lock case prepared for standard fittings
- latch handing is reversible
- latch, zinc, nickel plated
- follower, steel blade, 8 mm square hole, mounted in drawn steel bushes
- centred forend, satin stainless steel 1.4301 / AISI 304, changeable

Recommended Strike plate: 23                      side: non-handed

### Classification EN 12209

2	S	8	0	0	G	3	H	0	2	0
---	---	---	---	---	---	---	---	---	---	---

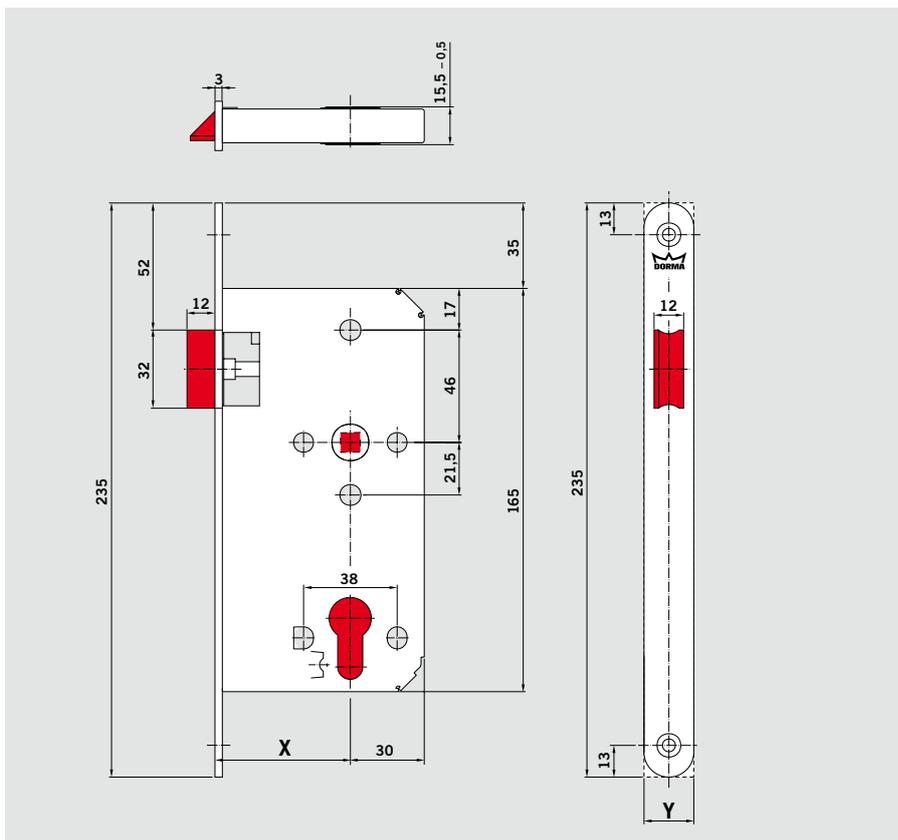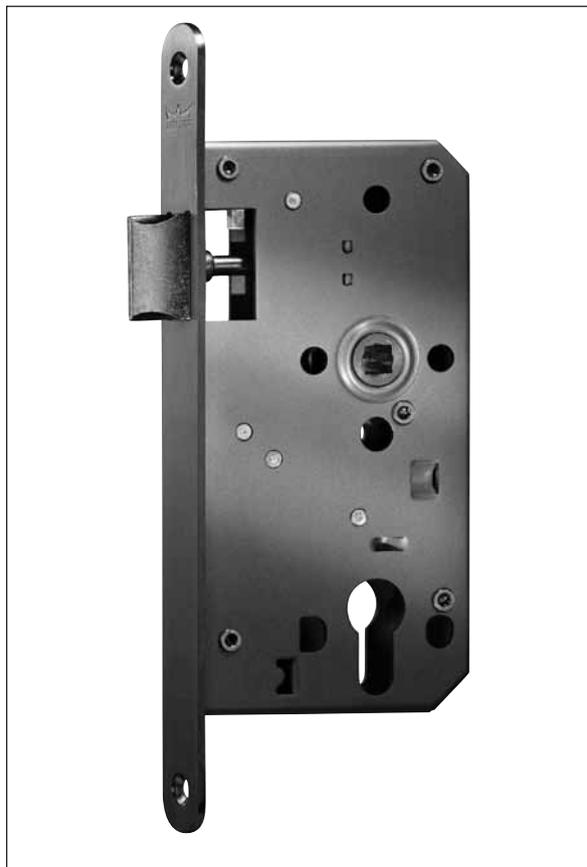

### Possible variation

#### Backset: X

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

#### Dimension of forend: Y

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

**Mortice lock 208**

Locks for interior doors, e.g. in office buildings

**Features**

Grade 2 – EN 12209


- closed lock case, zinc plated
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- dead bolt, zinc, nickel plated
- centred forend, satin stainless steel 1.4301 / AISI 304, changeable

**Recommended Strike plate: 21**      **side: non-handed**



**Classification EN 12209**

2	S	8	0	0	G	3	H	C	0	0
---	---	---	---	---	---	---	---	---	---	---

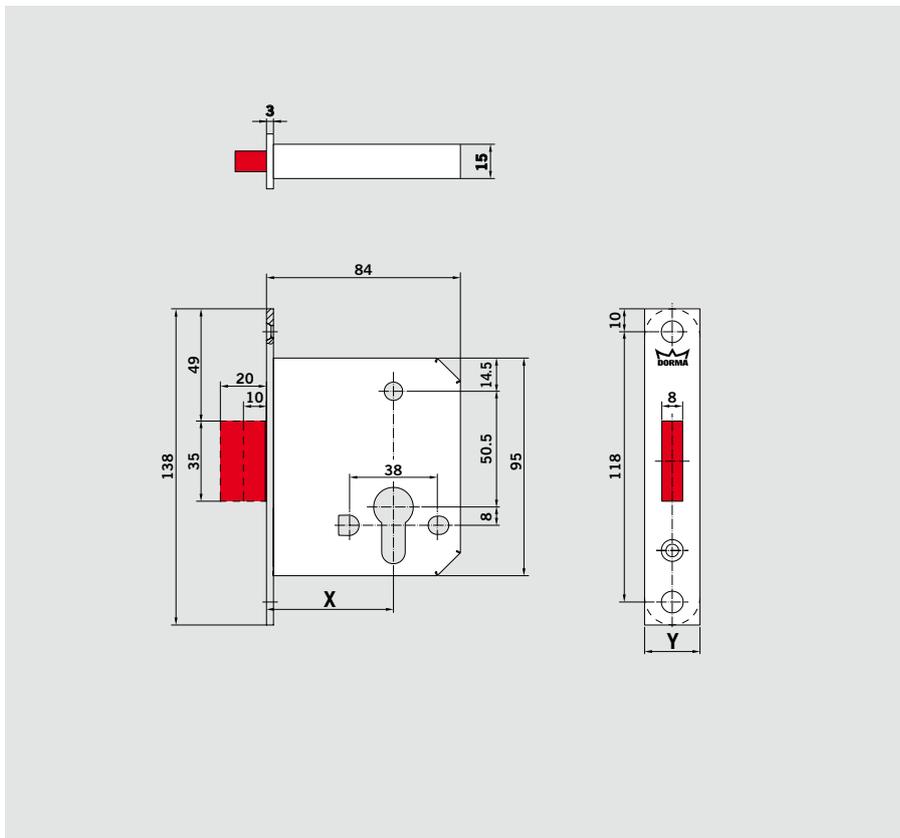

**Possible variation**

**Backset: X**

55 mm

**Dimension of forend: Y**

square 20 mm

24 mm

rounded 20 mm

24 mm

## Mortice lock 209

Locks for interior doors, e.g. in office buildings

### Features

Grade 2 – EN 12209


- closed lock case, zinc plated
- lock case prepared for standard fittings
- latch handing is reversible
- latch, zinc, nickel plated
- follower, steel blade, 8 mm square hole, mounted in drawn steel bushes
- centred forend, satin stainless steel 1.4301 / AISI 304, changeable

**Recommended Strike plate: 23**      **side: non-handed**



### Classification EN 12209

2	S	8	0	0	G	3	H	0	2	0
---	---	---	---	---	---	---	---	---	---	---

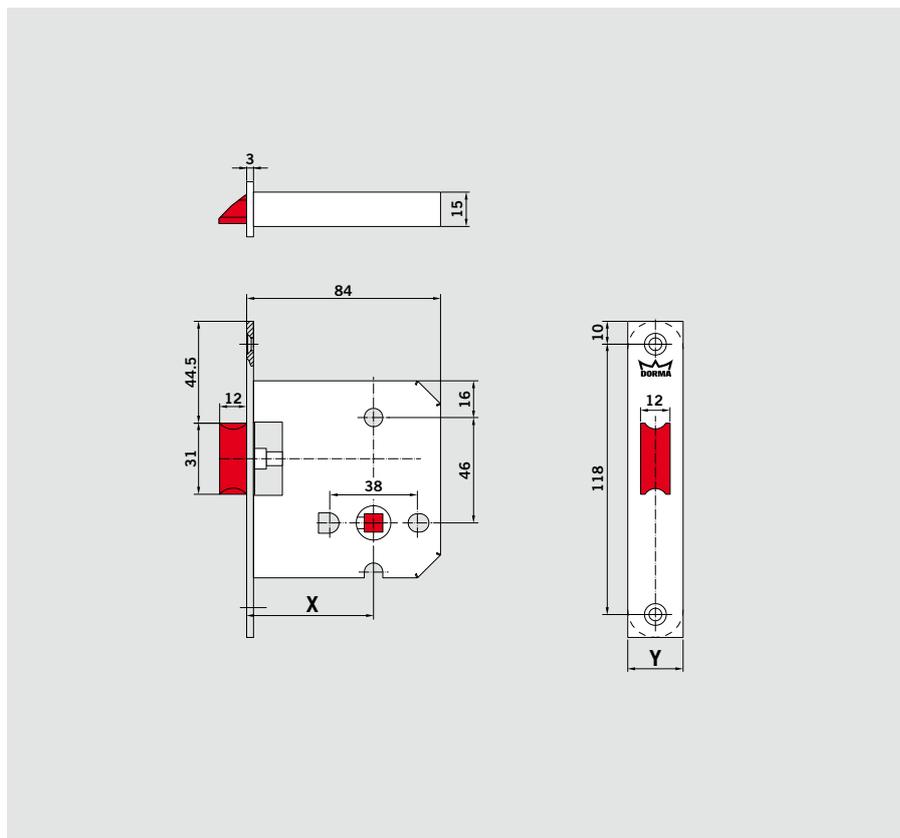

### Possible variation

**Backset: X**

55 mm

**Dimension of forend: Y**

square 20 mm

24 mm

rounded 20 mm

24 mm

**Mortice lock 232**

Locks for interior and exterior swing doors,  
e.g. in office buildings

**Features**


Grade 2 – EN 12209

- Lock case size DIN 18251-1, closed case, zinc plated
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- Roller latch (protrusion adjustable) and dead bolt, solid metal alloy, nickel plated
- centred forend, satin stainless steel 1.4301 / AISI 304, changeable

**Recommended Strike plate: 27**      **side: non-handed**

**Classification EN 12209**

2	S	8	0	0	G	3	H	C	0	0
---	---	---	---	---	---	---	---	---	---	---

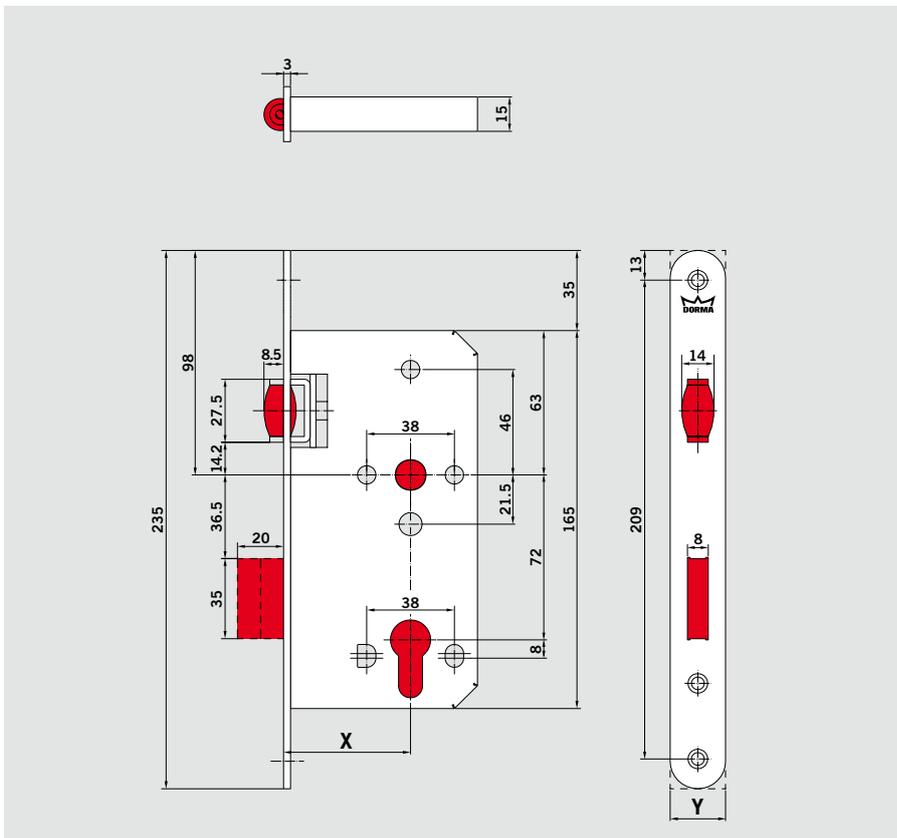

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



**Mortice lock 234**

Locks for interior doors, e.g. in office buildings

**Features**


Grade 2 – EN 12209

- Lock case size DIN 18251-1, closed case, zinc plated
- lock case prepared for Euro profile cylinder (DIN18252) and standard fittings
- latch handing is reversible
- latch, zinc, nickel plated
- follower, steel blade, 8 mm square hole, mounted in drawn steel bushes
- follower lockable by cylinder
- centred forend, satin stainless steel 1.4301 / AISI 304, changeable

**Recommended Strike plate: 23          side: non-handed**

**Classification EN 12209**

2	S	8	0	0	G	3	H	0	2	0
---	---	---	---	---	---	---	---	---	---	---

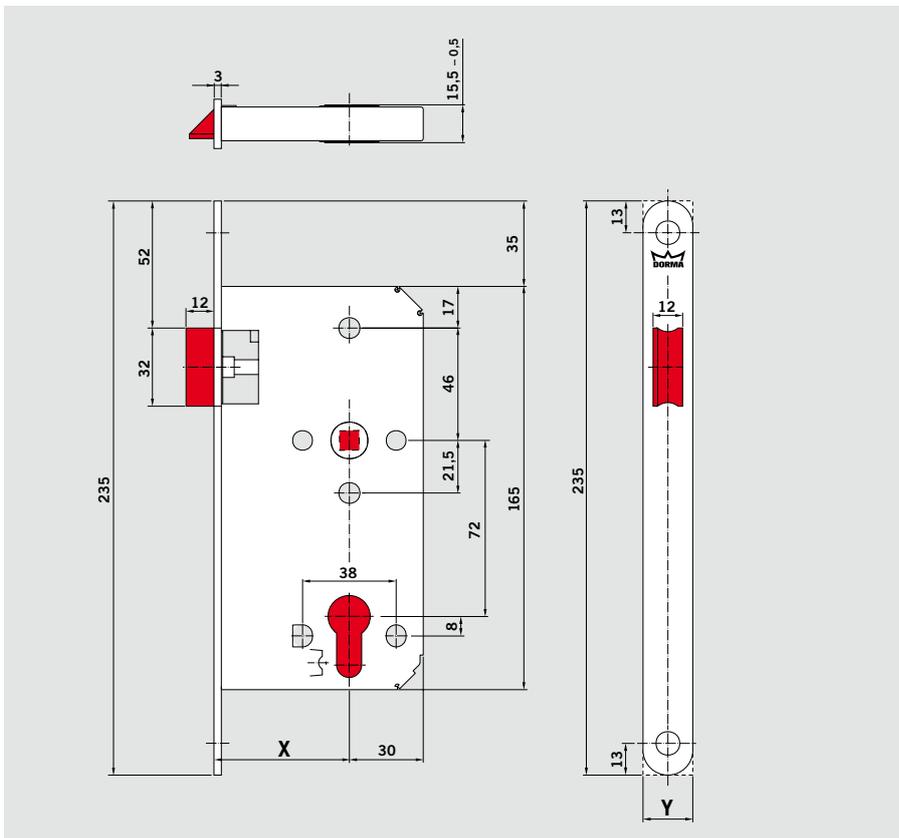

**Possible variation**

**Backset: X**

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

**Dimension of forend: Y**

- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik

## Mortice lock 235

Locks for bathroom doors, e.g. in office buildings

### Features


Grade 2 – EN 12209

- Lock case size DIN 18251-1, closed case, zinc plated
- lock case prepared for thumbturn and standard fittings (c/c 72 mm)
- latch handing is reversible
- latch and dead bolt, zinc, nickel plated
- follower, steel blade, 8 mm square hole, mounted in drawn steel bushes and 8 mm bathroom follower
- centred forend, satin stainless steel 1.4301 / AISI 304, changeable

**Recommended Strike plate: 20**      **side: non-handed**

### Classification EN 12209

2	S	8	0	0	G	3	H	G	2	0
---	---	---	---	---	---	---	---	---	---	---

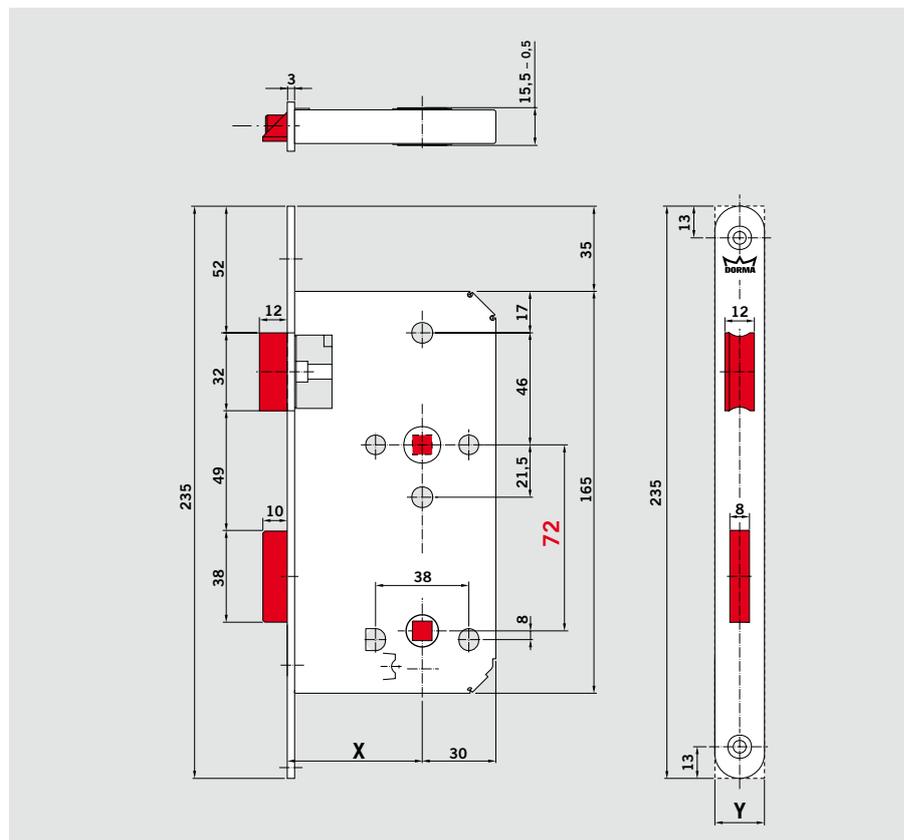

### Possible variation

#### Backset: X

- 55 mm
- 60 mm
- 65 mm
- 70 mm\*
- 80 mm\*

\*on request

#### Dimension of forend: Y


- square 20 mm
- 24 mm
- rounded 20 mm
- 24 mm



DORMA locks are prepared to be used with the levers of DORMA Beschlagtechnik


**Strike plates Type 020**

Material: satin stainless steel

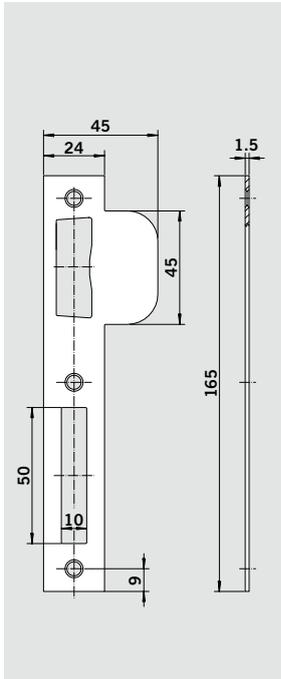


**Strike plates Type 020-1**

Material: satin stainless steel

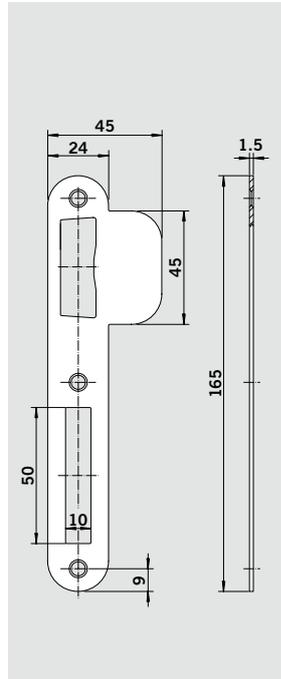


**Strike plates Type 021**

Material: satin stainless steel

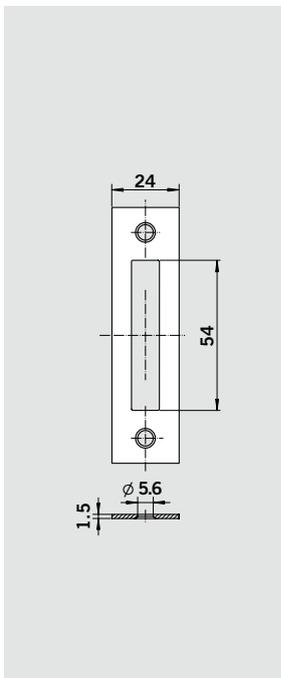

**Strike plates Type 023**

Material: satin stainless steel

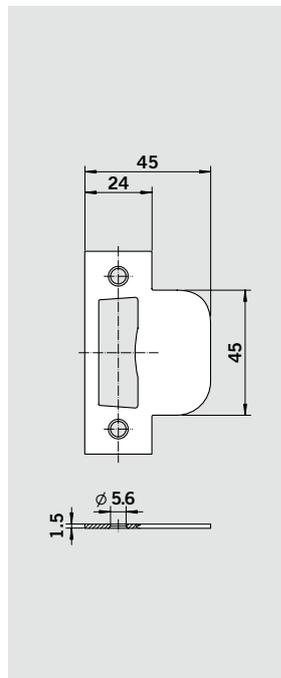

### Compatibility with the previous program

Locks of the previous program can be easily replaced by the locks of the new program. The dimensions as well as the functions of the two programs are similar.

The figure below shows the compatibility of the two programs.

New program	Previous program
<b>300 CE</b>	
381	151-F
385	191-F
388	132-F
389	115-F
391	210
392	117
394	781
<b>300</b>	
371	151
375	191
378	132
379	115
<b>200 CE</b>	
281	752-F
285	790-F
288	532-F
289	515-F
290	116
<b>200</b>	
271	771
275	775
278	778
279	779



**DORMA Mortice CE lock – PREMIER**

Locks for interior and exterior doors and fire-rated doors, intended for public buildings, Grade 3 – EN 12209, approved for fire-rated doors with CE-certificate, Lock case size DIN 18251-1, Latch handing is reversible, Lock case prepared for standard fittings, closed case, zinc plated, black painted, Latch and deadbolt satin stainless steel, Reinforced deadbolt with hardened anti-saw pins and anti-picking shield, Deadbolt projection double throw 20 mm (bathroom / WC 10 mm), Clamp follower 8 mm, stainless steel, with separate bush bearing, Centred forend, satin stainless steel AISI 316

**Lock type**

- Europrofile cylinder with night latch function, 72 mm centres, with sleeves (381)
- Bathroom/WC, for WC knob – 8 mm, 78 mm centres, with sleeves (385)
- Deadbolt lock, Europrofile cylinder, with sleeves (388)
- Latch lock, with sleeves (389)
- Europrofile cylinder, anti-thrust latch and deadbolt, 72 mm centres (391)
- Europrofile cylinder, anti-thrust latch, 72 mm centres (392)
- Europrofile cylinder, anti-thrust latch, split follower, classroom function, 72 mm centres (393)
- Europrofile cylinder, with night latch function, backset 45 mm only, 85 mm centres (394)

<b>Backset:</b>	<b>Forend width</b>	<b>Forend design</b>
<input type="checkbox"/> 45 mm*	<input type="checkbox"/> 20 mm	<input type="checkbox"/> Rounded ends
<input type="checkbox"/> 55 mm	<input type="checkbox"/> 24 mm	<input type="checkbox"/> Square ends
<input type="checkbox"/> 60 mm		
<input type="checkbox"/> 65 mm		
<input type="checkbox"/> 70 mm*		
<input type="checkbox"/> 80 mm*		

\*on request

**DORMA Mortice lock – PROJECT**

Locks for interior and exterior doors, intended for public buildings, Grade 3 – EN 12209, lock case size DIN 18251-1, Latch handing is reversible, Lock case prepared for standard fittings, closed case with sleeves, zinc plated, black painted, Latch and deadbolt satin stainless steel, Reinforced deadbolt with hardened anti-saw pins and anti-picking shield, Deadbolt projection double throw 20 mm (bathroom / WC 10 mm), Clamp follower 8 mm, stainless steel, with separate bush bearing, Centred forend, satin stainless steel AISI 316

**Lock type**

- Europrofile cylinder with night latch function, 72 mm centres (371)
- Bathroom/WC, for WC knob – 8 mm, 78 mm centres (375)
- Deadbolt lock, Europrofile cylinder (378)
- Latch lock (379)

<b>Backset:</b>	<b>Forend width</b>	<b>Forend design</b>
<input type="checkbox"/> 55 mm	<input type="checkbox"/> 20 mm	<input type="checkbox"/> Rounded ends
<input type="checkbox"/> 60 mm	<input type="checkbox"/> 24 mm	<input type="checkbox"/> Square ends
<input type="checkbox"/> 65 mm		
<input type="checkbox"/> 70 mm*		
<input type="checkbox"/> 80 mm*		

\*on request

### DORMA Mortice CE lock – CONTRACT

Locks for interior and exterior doors and fire-rated doors, intended for office buildings, Grade 2 – EN 12209, approved for fire-rated doors with CE-certificate, Lock case size DIN 18251-1, Latch handing is reversible, Lock case prepared for standard fittings, closed case, zinc plated, Latch and deadbolt satin stainless steel, Deadbolt projection double throw 20 mm (bathroom / WC 10 mm), Clamp follower 8 mm, stainless steel, mounted in drawn steel bushes, Centred forend, satin stainless steel AISI 304

#### Lock type

- Europrofile cylinder with night latch function, 72 mm centres (281)
- Bathroom/WC, for WC knob – 8 mm, 78 mm centres (285)
- Deadbolt lock, Europrofile cylinder (288)
- Latch lock (289)
- Latch lock, Europrofile cylinder with night latch function, 72 mm centres (290)

Backset:	Forend width	Forend design
<input type="checkbox"/> 55 mm	<input type="checkbox"/> 20 mm	<input type="checkbox"/> Rounded ends
<input type="checkbox"/> 60 mm	<input type="checkbox"/> 24 mm	<input type="checkbox"/> Square ends
<input type="checkbox"/> 65 mm		
<input type="checkbox"/> 70 mm*		
<input type="checkbox"/> 80 mm*		

\*on request

### DORMA Mortice lock – STANDARD

Locks for interior and exterior doors, intended for office buildings, Grade 2 – EN 12209, lock case size DIN 18251-1, Latch handing is reversible, Lock case prepared for standard fittings, closed case, zinc plated, Latch and deadbolt zinc, nickel plated, Deadbolt projection double throw 20 mm (bathroom / WC 10 mm), Follower 8 mm, steel blade, mounted in drawn steel bushes, Centred forend, satin stainless steel AISI 304

#### Lock type

- Europrofile cylinder with night latch function, 72 mm centres (271)
- Bathroom/WC, for WC knob – 8 mm, 78 mm centres (275)
- Deadbolt lock, Europrofile cylinder (278)
- Latch lock (279)
- Deadbolt lock, small case, 55 mm backset only, Europrofile cylinder, latch and deadbolt satin stainless steel (208)
- Latch lock, small case, 55 mm backset only, latch and deadbolt satin stainless steel (209)
- Europrofile cylinder, roller latch and deadbolt, 72 mm centres (232)
- Deadbolt lock, for WC knob – 8 mm (233)
- Europrofile cylinder, latch and lockable handle, 72 mm centres (234)
- Bathroom/WC, for WC knob – 8 mm, 72 mm centres (235)

Backset:	Forend width	Forend design
<input type="checkbox"/> 55 mm	<input type="checkbox"/> 20 mm	<input type="checkbox"/> Rounded ends
<input type="checkbox"/> 60 mm	<input type="checkbox"/> 24 mm	<input type="checkbox"/> Square ends
<input type="checkbox"/> 65 mm		
<input type="checkbox"/> 70 mm*		
<input type="checkbox"/> 80 mm*		

\*on request

**Door Control Division worldwide**

**Central Europe**

DORMA GmbH + Co. KG  
DORMA Platz 1  
D-58256 Ennepetal  
Tel. +49 2333 793-0  
Fax +49 2333 793-495

**Australasia**

DORMA Door Controls Pty. Ltd.  
52, Abbott Road  
Hallam/Victoria 3803  
Australia  
Tel. +61 3 8795 0666  
Fax +61 3 8795 0280

**China/Hong Kong**

DORMA Door Controls  
(Suzhou) Co. Ltd.  
No. 9, Hong Feng Road  
Suzhou Singapore Industrial Park  
Suzhou, 215021  
P.R. of China  
Tel. +86 512 67612481  
Fax +86 512 67614582

**DORMA Door Controls Pte. Ltd.**

Room 701, Technology Plaza  
651 King's Road  
North Point  
Hong Kong  
Tel. +852 25034632  
Fax +852 28875370

**Emerging Markets**

DORMA GmbH + Co. KG  
DORMA Platz 1  
D-58256 Ennepetal  
Tel. +49 2333 793-0  
Fax +49 2333 793-495

**DORMA Door Controls (Pty.) Ltd.**

Kings Court  
4A Mineral Crescent  
ZA-2000 Crown/Gauteng  
South Africa  
Tel. +27 11 8300280  
Fax +27 11 8300291

**Far East**

DORMA Far East Pte. Ltd.  
No. 31 Gul Lane  
Singapore 629425  
Tel. +65 6268 7633  
Fax +65 6265 7995

**France**

DORMA France S.A.S.  
Zone Europarc  
Immeuble Mega 42  
42, Rue Eugène Dupuis  
F-94046 Créteil Cedex  
Tel. +33 1 41942400  
Fax +33 1 41942401

**Gulf**

DORMA Gulf Door Controls FZE  
Jebel Ali Free Zone South  
Plot No. S 20135  
Road No. SW 301 G  
P.O. Box 17268  
Dubai – United Arab Emirates  
Tel. +971 4 8020400  
Fax +971 4 8869100/8869101

**North America**

DORMA Architectural Hardware  
DORMA Drive, Drawer AC  
Reamstown, PA 17567-0411  
Tel. +1 800 5238483  
Fax +1 800 2749724

**Scanbalt**

DORMA Danmark A/S  
Sindalvej 6-8  
DK-2610 Rødovre  
Tel. +45 44 543000  
Fax +45 44 543001

**South America**

DORMA Sistemas de Controles  
para Portas Ltda.  
Av. Piracema, 1400  
Centro Empresarial Tambore  
CEP 06400-933 Barueri/  
São Paulo, Brasil  
Tel. +55 11 46899280  
Fax +55 11 46899215

**South-East Europe**

DORMA AUSTRIA GmbH  
Pebering Strass 22  
A-5301 Eugendorf  
Tel. +43 6225 284880  
Fax +43 6225 28491

**South Europe**

DORMA Italiana S.r.l.  
Via. Canova 44/46  
I-20035 Lissone (MI)  
Tel. +39 039 244031  
Fax +39 039 24403310

**DORMA Ibérica, S.A.**

Camino San Martin de la Vega, 4  
E-28500 Arganda del Rey  
(Madrid)  
Tel. +34 91 8757850  
Fax +34 91 8757881

**UK/Ireland**

DORMA UK Ltd.  
Wilbury Way  
Hitchin  
GB-Hertfordshire SG4 0AB  
Great Britain  
Tel. +44 1462 477600  
Fax +44 1462 477601



**Door Control**



**Automatic**



**Glass Fittings  
and Accessories**



**Security/Time  
and Access (STA)**



**Movable Walls**