

D900 Grade 1 Small Case Mortise Dead Bolts



Grade 1 Small Case Mortise Dead Bolts

D900 Series

3 Technical Details/Specifications

How to Order

4 Locks

5 Keyways

Functions

6 Available Functions

Lock Options

7 Strikes

7 Occupancy Indicators

dormakaba USA quality and environmental management systems in Reamstown/Leola, PA and Steeleville, IL are certified to ISO 9001:2015 and ISO 14001:2015.




Intertek



Intertek



D900 Series

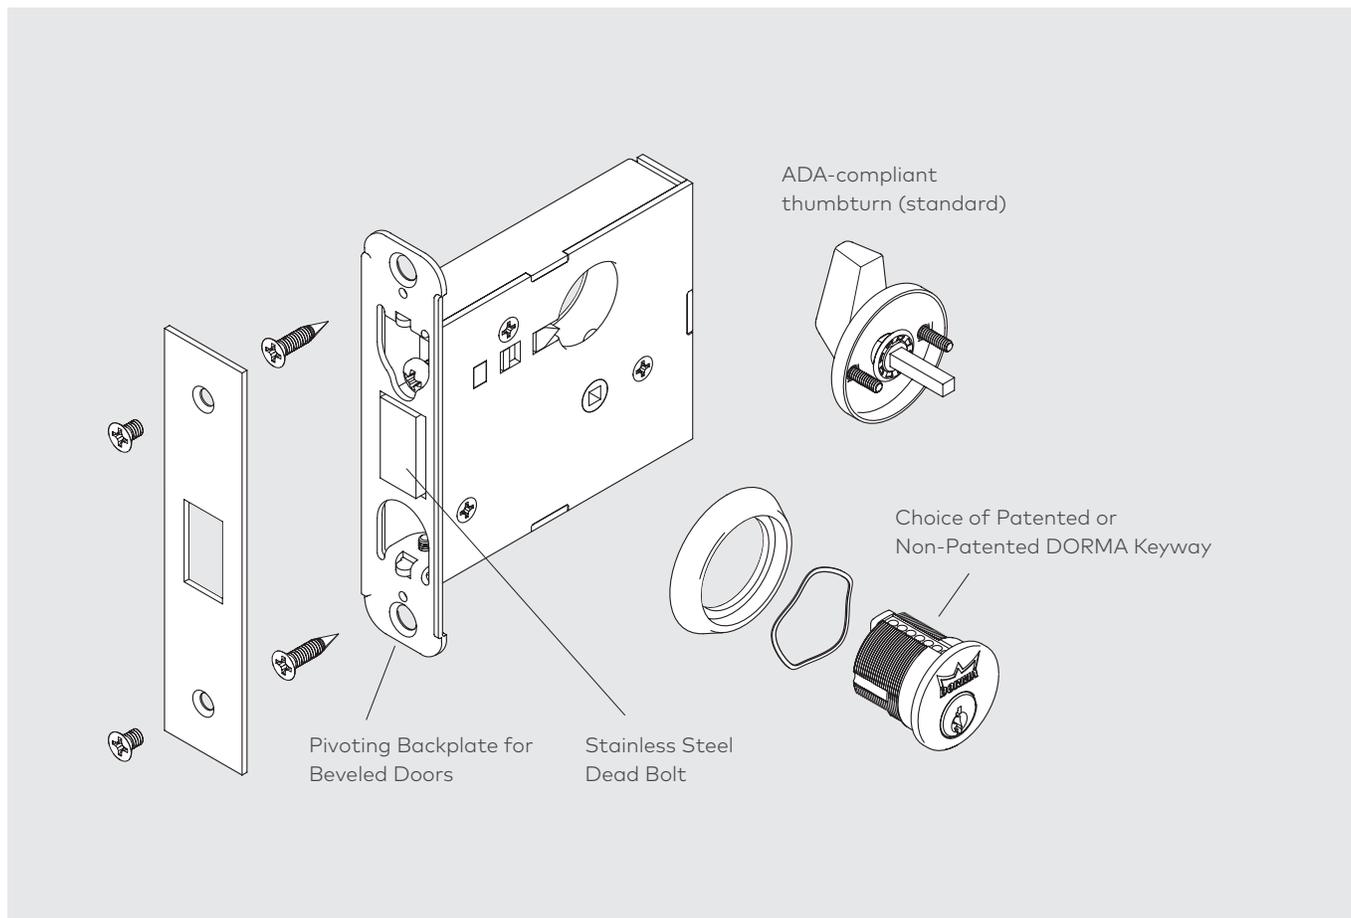

The D900 is a small case mortise dead bolt for use in heavy duty commercial environments such as schools, hospitals, and office buildings.

Typical applications are storage room doors, locker room doors, rest room doors, or any application where latching is not required.

The D900 can be used as a primary lock, or as an auxiliary lock.

Technical Details

- Standard door thickness 1-3/4"–2-1/4" thicker doors by special request.
- 2-3/4" backset.
- 1-1/8" x 5-9/16" faceplate.
- 1-1/8" x 3-1/2" no lip dead bolt strike.
- 1" throw, stainless steel bolt.
- Non-handed (field reversible).

Certifications

- ANSI/BHMA A156.36 Grade 1 certified.
- UL listed 3 hour fire rated. Locks are listed for A label and lesser class doors.
- Fire rated by itself or as



auxiliary latching device.

Cylinders and Keying

- Unless otherwise specified, cylinders will be provided in SC keyway with two (2) nickel silver keys.
- Optional patented key system available.

Finishes

- Brass: 605 PVD (Bright) or 606 PVD (Satin)
- Bronze: 612 PVD (Satin) or 613 PVD (Dark Oxidized Satin)
- Nickel: 619 PVD (Satin)
- Chrome: 625 (Bright) or 626 (Satin)
- Stainless: 629 (Bright) or 630 (Satin)

Warranty

For details, refer to **Limited Warranty** on our website at go.dormakaba.com/Terms-DA

How to order D900 Series locks


Function		Antimicrobial Coating		Security Screws		Strike Options		See Next Page for Keying Options	
Turn Only	81	AM	TX						
Indicator x Turn	71								
Cylinder x Classroom	63*								
Cylinder x Cylinder	62								
Cylinder x Blank	61								
Cylinder x Turn	60								

Product Family Grade 1 Small Case Mortise Dead Bolt	Satin Stainless	630	Right Hand/ Right Hand Reverse	RH	134 Door Thickness 1-3/4" - 2-1/4"	Handing (D963 only)	T	Temporary SFIC
	Satin Chrome	626		LH			J	SFIC (Less Core)
	Bright Chrome	625		C	SFIC			
	Satin Black	622 PVD		L	Less Cylinder			
	Satin Nickel	619 PVD		D	Conventional Cylinder			
	Dark Oxidized	613 PVD		G	Temporary Schlage LFIC			
	Satin Bronze	612 PVD		R	Schlage LFIC (Less Core)			
	Satin Bronze	612 PVD		F	Schlage LFIC			
	Satin Brass	606 PVD						
	Bright Brass	605 PVD						




D9	60	626			RH	134	5301	D	XXXX
Finish				Handing (D963 only)				Cylinder Type	

* D963 function available in 613, 619, 626 and 630 finish only.

How to order Keyways

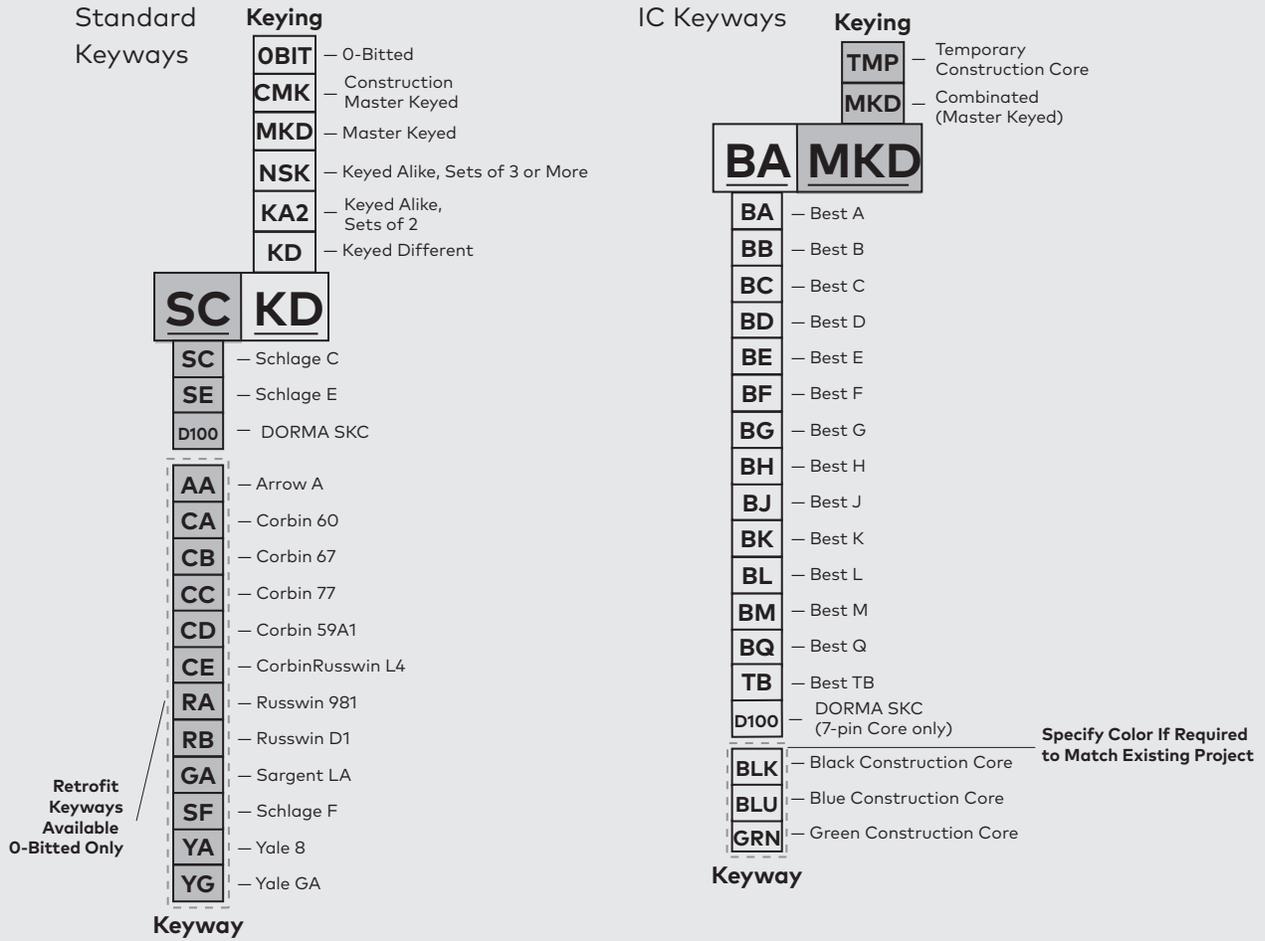


Functions

Function	Series	Outside/Inside	Description
Cylinder × Turn	D960	 E06071	<ul style="list-style-type: none"> • Dead bolt operated by key outside or by turn inside.
Cylinder × Blank	D961	 E06081	<ul style="list-style-type: none"> • Dead bolt operated by key outside only.
Cylinder × Cylinder	D962	 E06061	<ul style="list-style-type: none"> • Dead bolt operated by key either side.
Cylinder × Classroom	D963	 E06091	<ul style="list-style-type: none"> • Dead bolt operated by key outside. • Turn inside retracts but does not project dead bolt. • Available finishes—613, 619, 626, and 630.
Cylinder Indicator × Turn	D971	 E06181	<ul style="list-style-type: none"> • Dead bolt operated by key outside or by turn inside. • Indicator (included) message reads occupied/vacant or secured/unsecured.
Turn Only	D981	 E06181	<ul style="list-style-type: none"> • Dead bolt operated by turn inside.


Lock Options

Strike

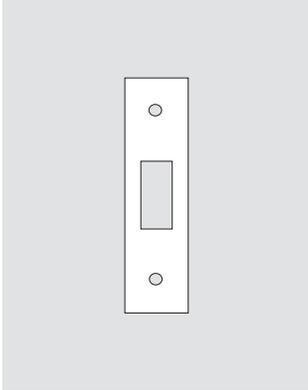


5301 — 1-1/8" x 3-1/2" square corner strike — no lip deadbolt.

Occupancy Indicators



79023* — Indicator used with cylinder, reading OCCUPIED/VACANT or SECURED UNSECURED. Both readings supplied.



79020 — Indicator used without cylinder, emergency access, reading OCCUPIED/VACANT.



79021 — Indicator used without cylinder, reading SECURED/UNSECURED. No emergency access.



79022 — Indicator with coiturn used without cylinder, reading OCCUPIED/VACANT.

NOTES:

- Occupancy indicators are for use on 1-3/4"-2-1/8" thick doors. Consult factory for thicker door applications.

* Included with D971 function.

www.dormakaba.us



dormakaba USA Inc.
Dorma Drive, Drawer AC
Reamstown, PA 17567
Tel: 800-523-8483
Fax: 800-274-9724
archdw.us@dormakaba.com

dormakaba Canada Inc.
1680 Courtney Park Drive, Unit 13
Mississauga, Ontario L5T 1R4
Tel: 800-387-4938
Fax: 905-670-5850
orders.canada@dormakaba.com

dormakaba México, S. de R.L. de C.V.
Calle Sur 110 no. 63, Col. Tolteca
01150 Mexico, D.F.
Tel: + 52 55 5272 6937 ext. 102
ventasdhw.mx@dormakaba.com



07000477 • 10-18 • TM • USA