

High Security IP68 Rated Padlock

P8065 CEN 5



Description:


High security applications including remote sites within the utility and infrastructure sectors as well as general perimeter security and security on track side/road side enclosures and cabinets.

A key is required to open and lock the shackle.

Suitable for universal indoor and outdoor use.

Features:

- 80mm hardened steel padlock and shackle
- Chrome plated
- 15mm diameter open shackle
- IP68 Standard: EN 60529:1991 + A1:2000 + A2:2013. IEC 60529:1989 + A1:1999 + A2:2013.
- Available with a removable or fixed shackle
- Available with a 27mm or 50mm shackle clearance
- EN 12320 Grade 5 (CEN 5)
- Cylinder is protected by a 5mm thick hardened plate
- Double locking hardened stainless steel ball bearing
- Uses a Swedish oval cylinder
- LPCB approved (LPS 1654: Issue 1 SR3) with Key Systems expert(plus), quattro plus (+) and Kaba 20
- Padlock Retention chain available separately

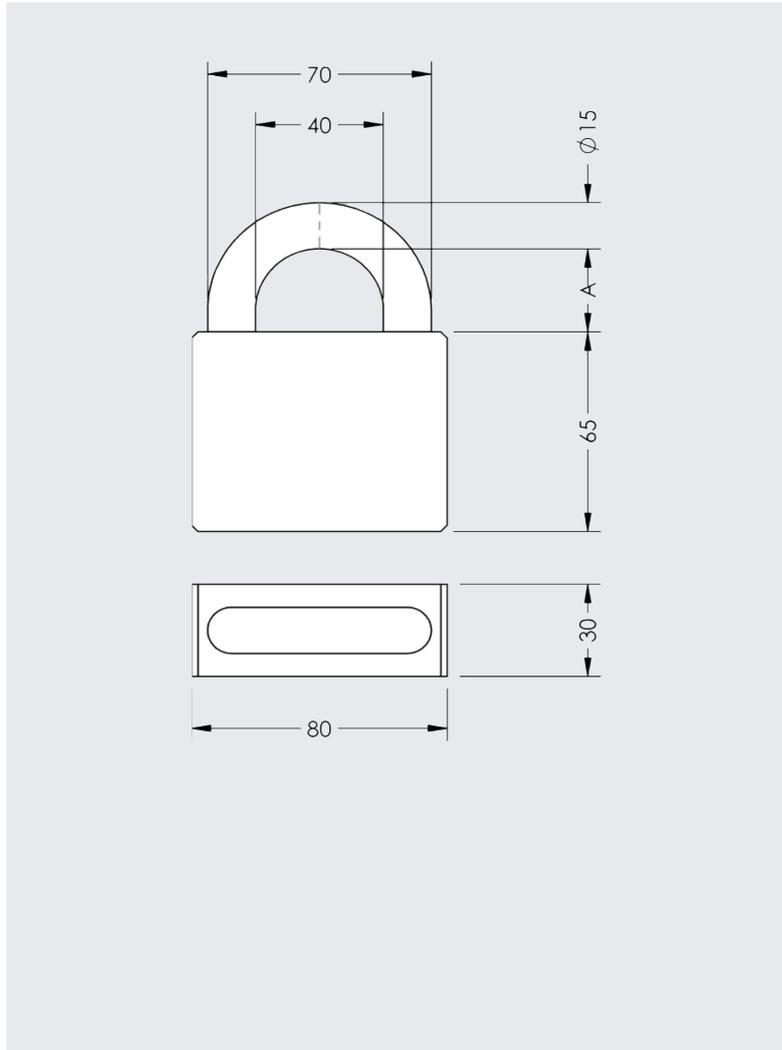

Padlock Information

Dimension A

- 27mm or 50mm

Available Patented Systems:

- Kaba 20 (K37)
- quattro plus (K85)
- expert plus (K83)
- pextra+ (PXP & PXPA)

Available Legacy Systems:

- Kaba 20 (P1)
- quattro Plus (K58)
- expert (K56)
- pextra (PX & PXA)

PDS-072-01

Any questions? We would be happy to advise you.

Contact us on: **01884 256464**