

# Simplex® L1000 Series



## Features

- **Access control:** Mechanical pushbutton lock—eliminates problems and costs associated with issuing, controlling, and collecting keys and cards. Provides exterior access by combination, while allowing free egress
- **No battery:** Fully mechanical lock eliminates the material and labor expense of battery replacements
- **Number of codes:** Single access code—one easy-to-manage code for all users
- **Programming:** Lock is easily programmed via keypad without removing lock from the door
- **Handing:** Factory-handed; not field reversible
- **Key override (optional):** Small format interchangeable cores, large format removable cores
- **Economical:** A cost effective access control solution

## Operation modes

- **Pushbutton access**
- **Passage (select models)** — allows access without using the lock entry code. Feature activated from the inside with a thumbturn or key (included with all passage feature models).
- **Privacy (select models)** — disables the lock from the inside so that the entry code cannot be used to gain access. Access is permitted using the key override only when in this mode.

## Model L101x

- Combination Entry
- Interior Combination Change

## Model L102x

- Combination Entry
- Key Override (not supplied)
- Interior Combination Change

## Model L103x


- Combination Entry
- Interior Combination Change
- Passage

## Model L104x

- Combination Entry
- Key Override (not supplied)
- Interior Combination Change
- Passage

## Model L1076

- Combination Entry
- Key Override (not supplied)
- Interior Combination Change
- Privacy (lockout) available on key override models only

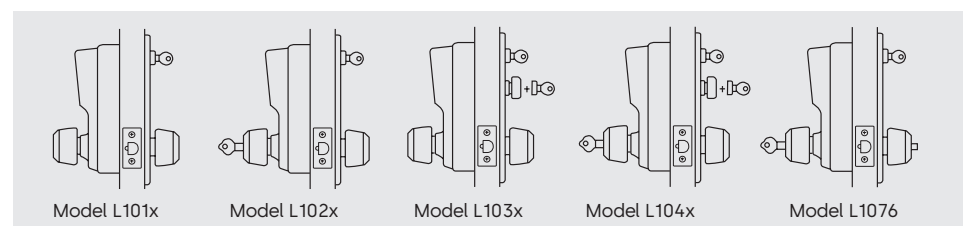

Specifications

Mechanical features

Construction	Heavy-duty cylindrical lock housing with cast front housing, unified trim plate, and fixed ADA-compliant levers
Locking device	Cylindrical latch with 3-hour UL/ULC fire rating on "A" labeled doors
Numeric keypad	Vandal resistant, solid metal pushbuttons
Handing	Factory-handed; not field reversible
Standard finishes	Satin Chrome 26D (626), Antique Brass 05 (609)
Optional finishes	Bright Brass 03 (605), Bright Chrome 026 (625)
Backset	2 ¾" (70 mm), 2 " (60 mm)
Latch	½" (13 mm) throw latch, ¾" (19 mm) throw latch (optional)
Minimum stile recommended	5" (127 mm)
Weight	8.25 lbs. (3.7 kg)
Strike	Standard strike plate; ASA strike plate

Key override

Interchangeable cores	Small format—Best and equivalents (6 or 7-pin length); core not included
Removable cores	Large format—Medeco/ASSA/Yale/Abloy (5 or 6-pin length); Corbin Russwin (6-pin length); Schlage, and Sargent; core not included

Installation

Door preparation	Easily installs on wood or metal doors. ASA 161 door preparation with additional through holes.
Door thickness	Pre-assembled to accommodate 1-5/8" (41mm) to 1-7/8" (48mm) doors. Hardware included to cover door thickness applications: 1-3/8" (35mm) to 1-1/2" (38mm), 2" (51mm) to 2-1/4" (57mm)


Certification and testing

Accessibility standard	Americans with Disabilities Act (ADA); fixed ADA-compliant levers
Durability	D.O.D. Compliant 5220.22M for supplemental access control; weather resistant
Fire rating	3-hour UL/ULC fire rating for "A" labeled doors

Warranty

Warranty	3-year warranty
----------	-----------------

Dimensions

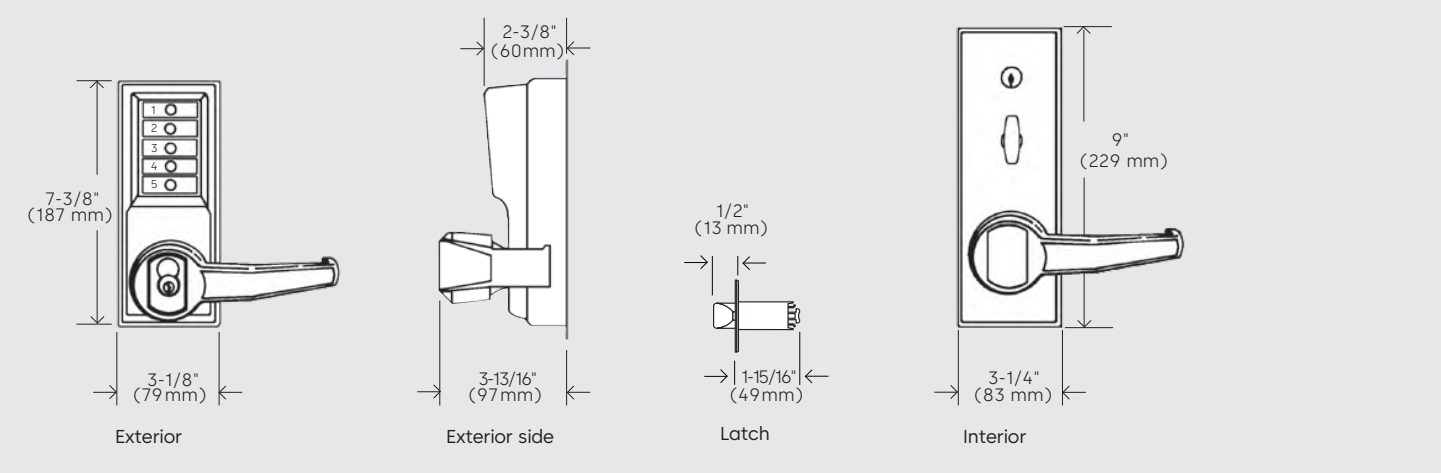

© dormakaba 2025 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation.

Any questions? We would be happy to advise you.  
Contact us at: 1-800-523-8483