



PS534RF REGULATED POWER SUPPLY
INSTALLATION INSTRUCTIONS




AC INPUT: →
GRN - GROUND
WHT - NEUTRAL
BLK - HOT

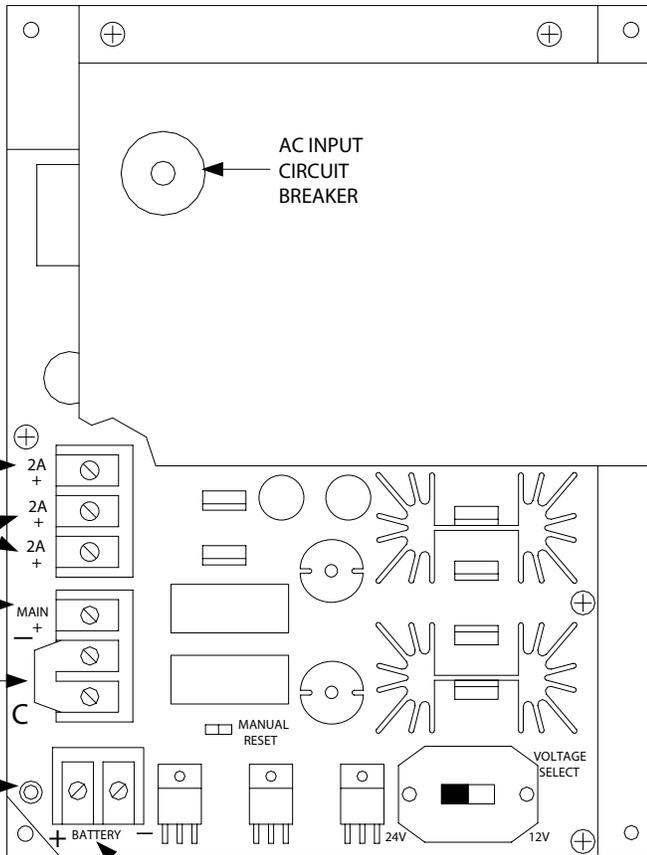

COMPONENT LOCATIONS

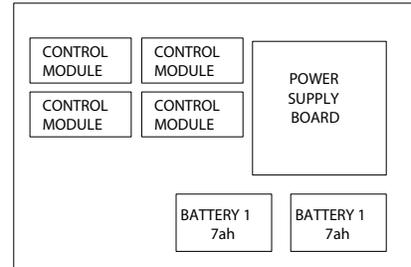

MAIN SYSTEM ON-OFF

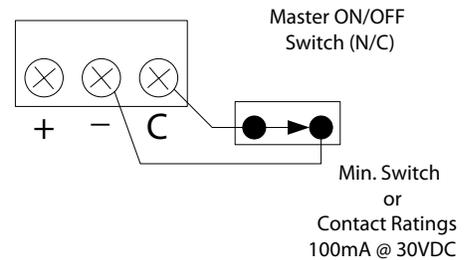

Min. Switch or Contact Ratings
100mA @ 30VDC

LED STATUS LEGEND:
YELLOW - SYSTEM OK
RED - NO AC INPUT
GREEN - NO DC OUTPUT

BATTERY INPUT TERMINALS

24V POSITION
12V POSITION



VOLTAGE SELECTION
NOTE: POWER MUST BE
TURNED OFF BEFORE
CHANGING VOLTAGE


POWER SUPPLY SPECIFICATIONS

Input Voltage: 115 VAC @ 60hz
Input Current: 1.2 amps Max.
Output Voltage: 12/24 VDC (Regulated & Filtered)
Output Current: 4 amps
Ripple Voltage: 0.05 Volts Max.
Battery Charger Max. Current: 0.35 amps
Maximum recommended battery size: 7 ah
(Replace batteries every 3 years)
For wire gage chart, and to determine battery backup capacity refer to charts in the sales brochure.

Suitable Uses:
Electric Lock Power Supply
Access Control Power Supply

TEST UNIT YEARLY

12 Volt Mode
Battery Connections

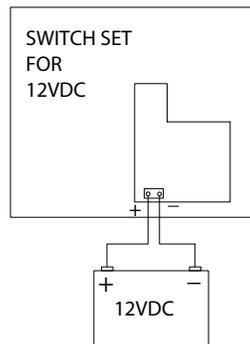

24 Volt Mode
Battery Connections

