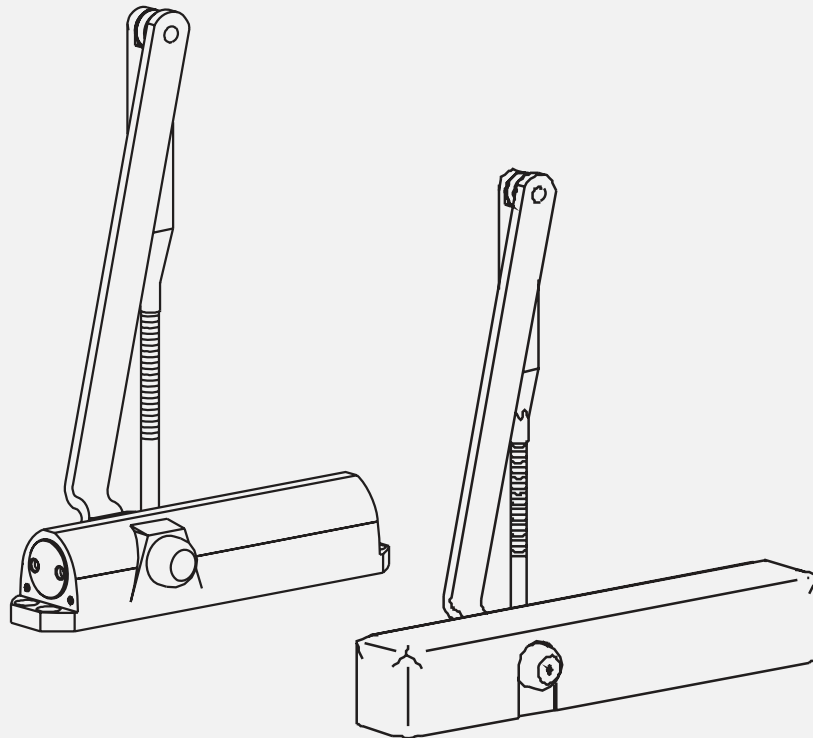


7300 Series

Closers

**Applications:**

The 7300 Series is designed to provide a highly flexible door control system suitable for use on all hollow metal, aluminum, and wood doors typically used in commercial construction. It is available in fixed spring sizes: 2, 3, 4, and 5. Doors may be mounted with either ball bearing hinges or pivots. Special brackets and other adapting hardware are available with the 7300 Series product.

Listings and approvals:

- ANSI Grade 1
- UL and ULC
- UL10C for positive pressure
- UBC 7.2 1997
- CSFM
- M.E.A.

Warranty: 25 Years

Range of door sizes:

- Exterior door widths to 48" (1219mm)
- Interior door widths to 48" (1219 mm)
- Door heights to 96" (2438 mm)
- Door weights to 200 pounds (91 kg)

Finishes:**Standard sprayed finishes**

- 689 (Aluminum)
- 690 (Dark Statuary Bronze)
- 691 (Dull Bronze)
- 693 (Black)
- 695 (Dark Duranodic Bronze)
- 696 (Satin Brass)

Custom painted finishes

Submit sample.

Customer approval required.

Closer mounting options:

- (based on arm selection)
- Regular pull side of the door
 - Top jamb push side of the door
 - Parallel arm on push side of the door

Arm functions:

- Regular, Top Jamb or Parallel Arm
- Friction hold-open

Closer functions:

- Adjustable back check intensity
- Adjustable sweep speed
- Adjustable latch speed

Cover options:

- Optional slim plastic cover

ANSI A156.4 Grade 1 selector chart

Arm(s)	Hingeside	Parallel arm	Top jamb
AR	C02011	C02021	C02041
FH	C02051	C02061	C02081
FT4 function options	A, D	A, D	A, D



Any questions? We would be happy to advise you.
Contact us at: 1-800-523-8483