

# Keyscan K-VAN

## Vandal resistant proximity reader



### **Vandal resistant 125 kHz proximity reader with Fibertex technology**

Keyscan's K-VAN proximity reader is an ideal selection when planning access control into rough environments. Rely on the Keyscan K-VAN vandal resistant proximity reader, constructed of a solid stainless steel body and fibertex.


K-VAN is an ideal proximity reader for all indoor or outdoor applications where aggressive behavior, crime or high-threat environments could be expected.

### **Features**

- Solid stainless steel bezel with Fibertex® insert provides the highest level of vandal resistance
- Fibertex® material is UL752 listed for bullet resistant integrity
- May be used on non-Keyscan systems with many HID 125kHz card protocols
- Pass-thru Wiegand output standard
- Suitable for indoor and outdoor applications in all weather conditions
- Provides non-contact read range of up to 25mm (1 inch)
- Limited lifetime warranty against defects in materials and workmanship
- Stylish yet extremely robust for the toughest applications
- Uses proven digital radio frequency identification technology
- Mounting options include two countersunk 0.25 inch thru-holes as well as four 1/4-20 tapped holes in the back for tamper-proof blind mount installations

Ideal for environments where crime and aggressive behaviors could be expected.

Keyscan K-VAN typical installation

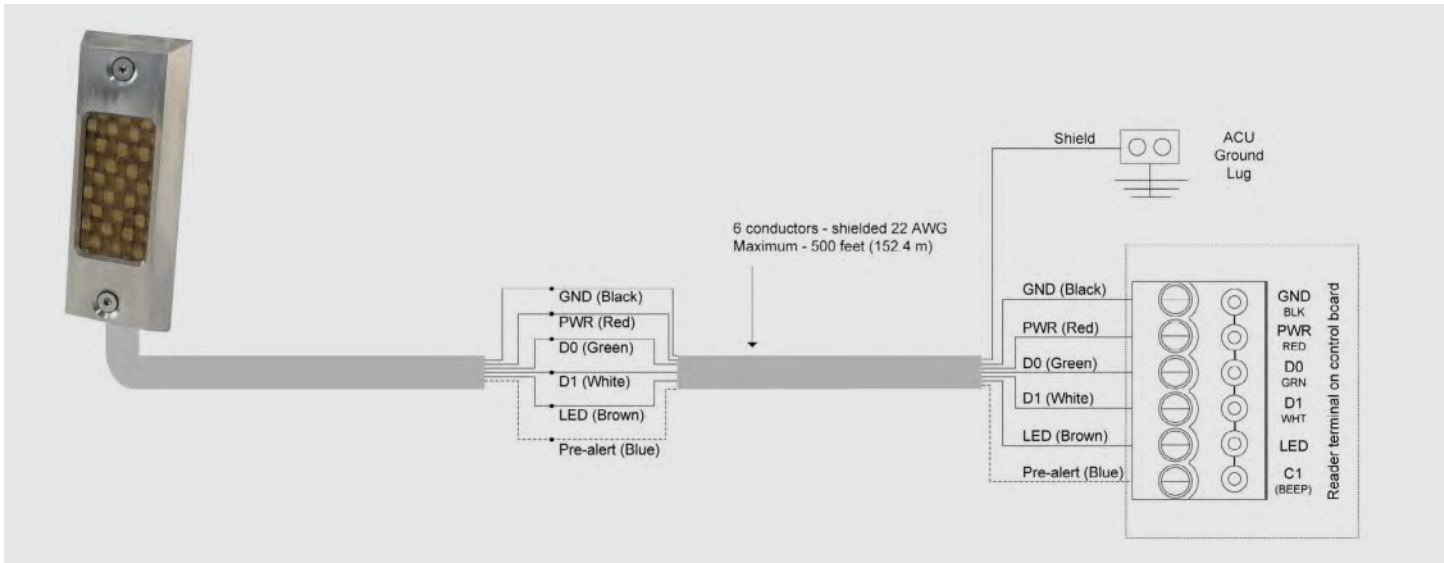

Specifications

Size	5.25" x 2.0" x 0.75" (13.4cm x 5.1cm x 1.9cm)
Read range	Up to 1 Inch (25mm)
Input voltage	12 VDC at reader
Typical current draw	90 mA
Operating temperature	-40°C to 65°C (-40°F to 149°F)
Cable	6 conductor shielded 22 AWG 12" Pigtail standard
Indoor/outdoor design	Easily installed in any location

© dormakaba 2025 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation.

Any questions? We would be happy to advise you.  
Contact us at: 1-888-539-7226