

# ICU 300/300T

## Healthcare manual sliding door



### Standard ICU features


- Heavy-duty Delrin® rollers
- Simple operation
- Electrostatic discharge grounding
- Low maintenance
- Easy installation
- Muntins

### Optional features

- Self-closing panels **NEW!**
- Electric shutter strike for access control **NEW!**
- Remote panel status monitoring
- Muntins
- Speciality finish options
- 7" & 10" bottom rails
- Smoke rated package:
  - Meets requirements of UL 1784
  - Positive latching
  - Santoprene rubber weather stripping

### Description

ICU300 healthcare doors are available in a wide range of sizes, configurations, and finishes. Single, biparting, or telescopic doors are available with either two, three, four, or six panels. A recessed track or trackless guide system allows for easy operation with or without a floor track. The ICU300 allows for continuous observation of patients, while allowing quick and easy access during emergency conditions. The door is capable of emergency egress of the sliding and fixed panels when required. Emergency release hardware allows for the door to swing out in the direction of egress when pushed.

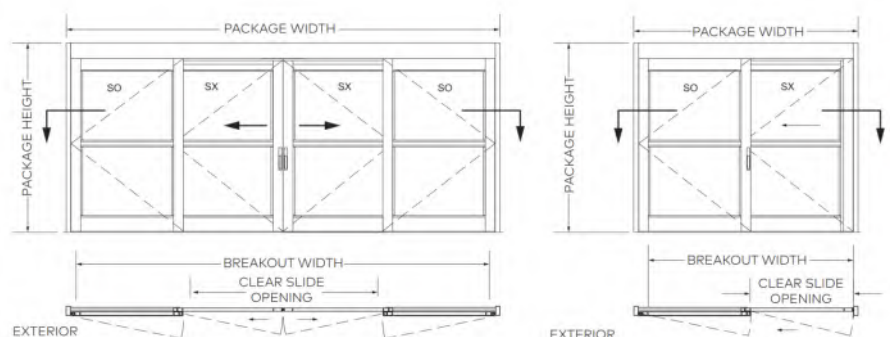

### Factsheet

# ICU300 Technical specification

Configuration		
Standard finishes	Clear or Dark Bronze Anodized	
Package height	up to 9'-0" (108")	
Pacakge width	[Single slide up to 9'-0"] (108") [Bi-part slide up to 16'-0"] (192") [Single telescopic slide up to 12'-0"] (108") [Bi-part telescopic slide up to 18'-0"] (216")	
Door panels	2-5/8" Narrow stile [Including 3/4" wide glass stop] 3-1/4" Muntin mounted at 41.75" [Including 3/4" wide glass stop] 4" Bottom rail [Including 3/4" wide Glass stop] 7" & 10" Bottom rails available	
Jamb tubes	1-3/4" x 4-1/2" smooth or double pocket 2" x 6" option available	
Bi-parting narrow stile	Minimum	Maximum
Overall frame width	8'-6"	16'
Rough opening width	8' - 6' 1/2"	16 1/2"
Clear slide opening	39 - 5/8"	84 - 5/8"
Header height	7'	9'
Rough opening height	7' - 1/4"	9' - 1/4"
Bi-parting telescopic	Minimum	Maximum
Overall frame width	12' - 7"	18'
Rough opening width	13' - 1/2"	16' - 1/2"
Clear slide opening	83 - 13/16"	107 - 13/16"
Header height	7'	9'
Rough opening height	7' - 1/4"	9' - 1/4"

Safety and security		
Lock	Maximum security two-point mortise lock Electric Shutter Strike	
Remote monitoring	Security contacts	
Features		
Threshold	Surface mounted or recessed	
Weather stripping	Brush or Santoprene rubber	
Glass stops	1/4" to 1" In door panels	
Single slide narrow stile	Minimum	Maximum
Overall frame width	6' - 6"	9'
Rough opening width	6' - 6 1/2"	9' - 1/2"
Clear slide opening	32 - 7/16"	47 - 7/16"
Header height	7'	9'
Rough opening height	7' - 1/4"	9' - 1/4"
Single slide telescopic	Minimum	Maximum
Overall frame width	7'	12'
Rough opening width	7'-1/2"	12'-1/2"
Clear slide opening	44' - 9/16"	84 - 9/16"
Header height	7' 4"	9'
Rough opening height	7' - 4 1/2"	9' - 1/4"

- Standards of compliance**
- 1. ICC/IBC - International Building Code
  - 2. NFPA 101 - Life Safety Code
  - 3. UL 1784 - Standard for Air Leakage

Any questions? We would be happy to assist.  
Contact Customer Service at 800 523 8483 or [automaticorders.us@dormakaba.com](mailto:automaticorders.us@dormakaba.com)