

ICU 200/200T

Healthcare manual sliding door



ICU300 shown

Standard ICU features


- Heavy-duty Delrin® rollers
- Simple operation
- Electrostatic discharge grounding
- Low maintenance
- Easy installation
- Muntins

Optional features

- Self-closing panels **NEW!**
- Electric shutter strike for access control **NEW!**
- Remote panel status monitoring
- Muntins
- Speciality finish options
- 7" & 10" bottom rails
- Smoke rated package:
 - Meets requirements of UL 1784
 - Positive latching
 - Santoprene rubber weather stripping

Description

ICU200 healthcare doors are available in a wide range of sizes, configurations, and finishes. Single, biparting, or telescopic doors are available with either two, three, four, or six panels. A recessed track or trackless guide system allows for easy operation with or without a floor track. The ICU200 allows for continuous observation of patients, while allowing quick and easy access during emergency conditions. The door is capable of emergency egress of the sliding panel when required. Emergency release hardware allows for the door to swing out in the direction of egress when pushed.

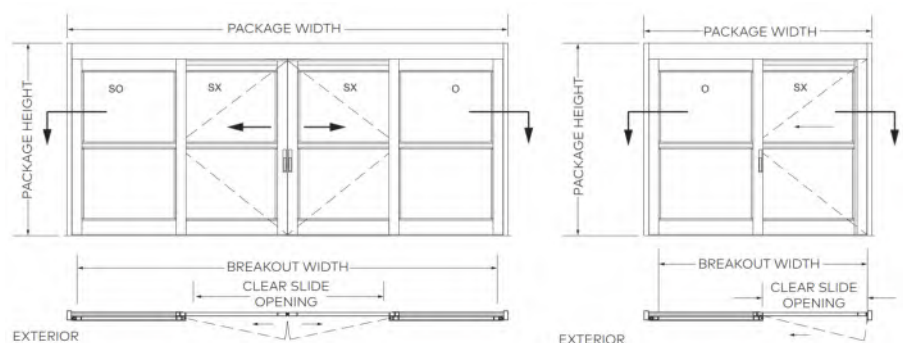

Factsheet

ICU200 Technical specification

Configuration			Safety and security		
Standard finishes	Clear or Dark Bronze Anodized		Lock	Maximum security two-point mortise lock Electric Shutter Strike	
Package height	up to 9'-0" (108")		Remote monitoring	Security contacts	
Pacakge width	[Single slide up to 9'-0"] (108") [Bi-part slide up to 16'-0"] (192") [Single telescopic slide up to 12'-0"] (108") [Bi-part telescopic slide up to 18'-0"] (216")		Features		
Door panels	2-5/8" Narrow stile [Including 3/4" wide glass stop] 3-1/4" Muntin mounted at 41.75" [Including 3/4" wide glass stop] 4" Bottom rail [Including 3/4" wide Glass stop] 7" & 10" Bottom rails available		Threshold	Surface mounted or recessed	
Jamb tubes	1-3/4" x 4-1/2" smooth or double pocket 2" x 6" option available		Weather stripping	Brush or Santoprene rubber	
			Glass stops	1/4" to 1" In door panels	
Bi-parting narrow stile	Minimum	Maximum	Single slide narrow stile	Minimum	Maximum
Overall frame width	8'-6"	16'	Overall frame width	6' - 6"	9'
Rough opening width	8' - 6' 1/2"	16 1/2"	Rough opening width	6' - 6 1/2"	9' - 1/2"
Clear slide opening	39 - 5/8"	84 - 5/8"	Clear slide opening	32 - 7/16"	47 - 7/16"
Header height	7'	9'	Header height	7'	9'
Rough opening height	7' - 1/4"	9' - 1/4"	Rough opening height	7' - 1/4"	9' - 1/4"
Bi-parting telescopic	Minimum	Maximum	Single slide telescopic	Minimum	Maximum
Overall frame width	12' - 7"	18'	Overall frame width	7'	12'
Rough opening width	13' - 1/2"	16' - 1/2"	Rough opening width	7'-1/2"	12'-1/2"
Clear slide opening	83 - 13/16"	107 - 13/16"	Clear slide opening	44' - 9/16"	84 - 9/16"
Header height	7'	9'	Header height	7' 4"	9'
Rough opening height	7' - 1/4"	9' - 1/4"	Rough opening height	7' - 4 1/2"	9' - 1/4"

- Standards of compliance**
- 1. ICC/IBC - International Building Code
 - 2. NFPA 101 - Life Safety Code
 - 3. UL 1784 - Standard for Air Leakage

Any questions? We would be happy to assist.
Contact Customer Service at 800 523 8483 or automaticorders.us@dormakaba.com