

# High Security Padlock

## P6062 CEN 4



### Description:

High security applications including remote sites within the utility and infrastructure sectors as well as general perimeter security and security on track side/road side enclosures and cabinets.

A key is required to open and lock the shackle.


Suitable for universal indoor and outdoor use.



LPS 1654: Issue 1  
Cert Number: 1452a

### Features:

- 60 mm body - hardened steel padlock and shackle
- Chrome plated
- 11 mm diameter open shackle
- Shackles available with 28 & 50 mm clearance
- EN 12320 Grade 4 (CEN4)
- Double locking hardened stainless steel ball bearing
- Available in fixed and removable shackles
- Uses a Swedish oval cylinder
- LPCB approved (LPS 1654: Issue 1 SR2) with Key Systems pextra+ (PXP/PXPA), expert (K56), expert Plus (K83), Quattro plus (K58 & K85) and Kaba 20 (K23 & K37)
- Padlock Retention chain available separately

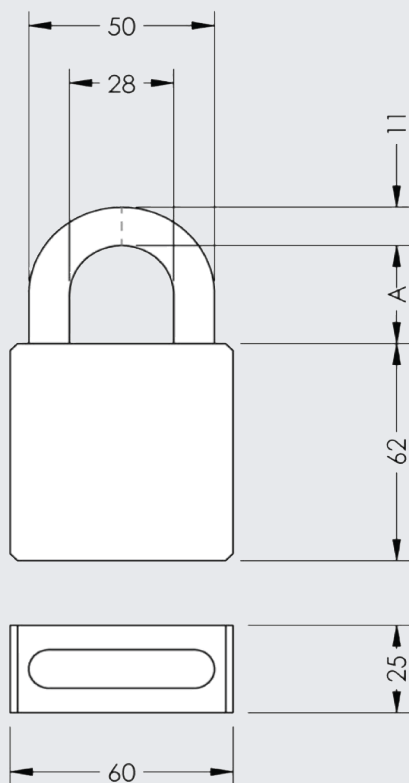

## Padlock Information

---

### Dimension A

- 28mm or 50mm

### Available Patented Systems:

- Kaba 20 (K37)
- quattro plus (K85)
- expert plus (K83)
- pextra Q (PXQ & PXQA)

### Available Legacy Systems:

- Kaba 20 (P1)
- quattro Plus (K58)
- expert (K56)
- pextra+ (PXP & PXPA)

**PDS-019-04**

**Any questions? We would be happy to advise you.**

Contact us on: **01884 256464**