

# High Security Padlock

## P8065 CEN 5



### Description:

High security applications including remote sites within the utility and infrastructure sectors as well as general perimeter security and security on track side/road side enclosures and cabinets.

A key is required to open and lock the shackle.


Suitable for universal indoor and outdoor use.



LPS 1654: Issue 1  
Cert Number: 1452a

### Features:

- 80mm hardened steel padlock and shackle
- Chrome plated
- 15mm diameter open shackle
- Available with a removable or fixed shackle
- Available with a 27mm or 50mm shackle clearance
- EN 12320 Grade 5 (CEN 5)
- Cylinder is protected by a 5mm thick hardened plate
- Double locking hardened stainless steel ball bearing
- Uses a Swedish oval cylinder
- LPCB approved (LPS 1654: Issue 1 SR3) with Key Systems expert (K56), expert Plus (K83), Quattro plus (K58 & K85) and Kaba 20 (K23 & K37)
- Padlock Retention chain available separately

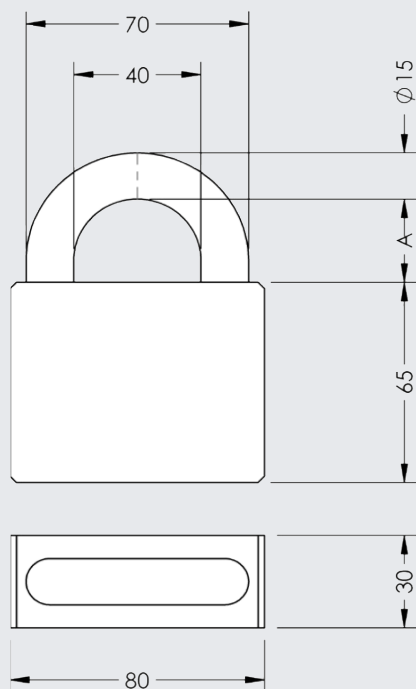

## Padlock Information

---

### Dimension A

- 27mm or 50mm

### Available Patented Systems:

- Kaba 20 (K37)
- quattro plus (K85)
- expert plus (K83)
- pextra Q (PXQ & PXQA)

### Available Legacy Systems:

- Kaba 20 (P1)
- quattro Plus (K58)
- expert (K56)
- pextra+ (PXP & PXPA)

**PDS-020-04**

**Any questions? We would be happy to advise you.**

Contact us on: **01884 256464**