

RCI 0162

3/4" Rim strike



RCI 0162 is a completely surface-mounted rim strike designed for use with Pullman latch rim exit devices.

Features

- Completely surface-mounted – no frame cutting required
- Accommodates 1/2" to 3/4" (13mm–19mm) latch projection
- Stainless steel ensures superior strength and creates a sleek aesthetic design
- Horizontal adjustment ensure proper latch positioning to compensate for door misalignment – up to 1/4" (6.4mm)
- The one-piece, conventional keeper design promotes even load distribution for increased security in the event of an attempted forced entry
- Plug-in wire connectors
- Lockdown holes for secure mount
- HEX socket head cap screws for added support
- Installation tool included (HEX key)
- Non-handed (featuring horizontal solenoid design)
- 1/16" (1.5mm) mounting spacers for additional latch engagement included
- Brushed Stainless Steel (32D) finish
- Factory tested to over 4-million cycles of operation



Energy
500mA (max at 12VDC)
Field-selectable
12/24VDC & 12-24VAC



Strength
1,500lbf static
70ft-lb dynamic



Warranty
10 year limited warranty



Fire-rated
Optional 3-hour model available
(F0162)



Mode
Fail-secure




Endurance
500,000 cycles



Latch Monitoring
Optional latch monitor
model available

Specifications

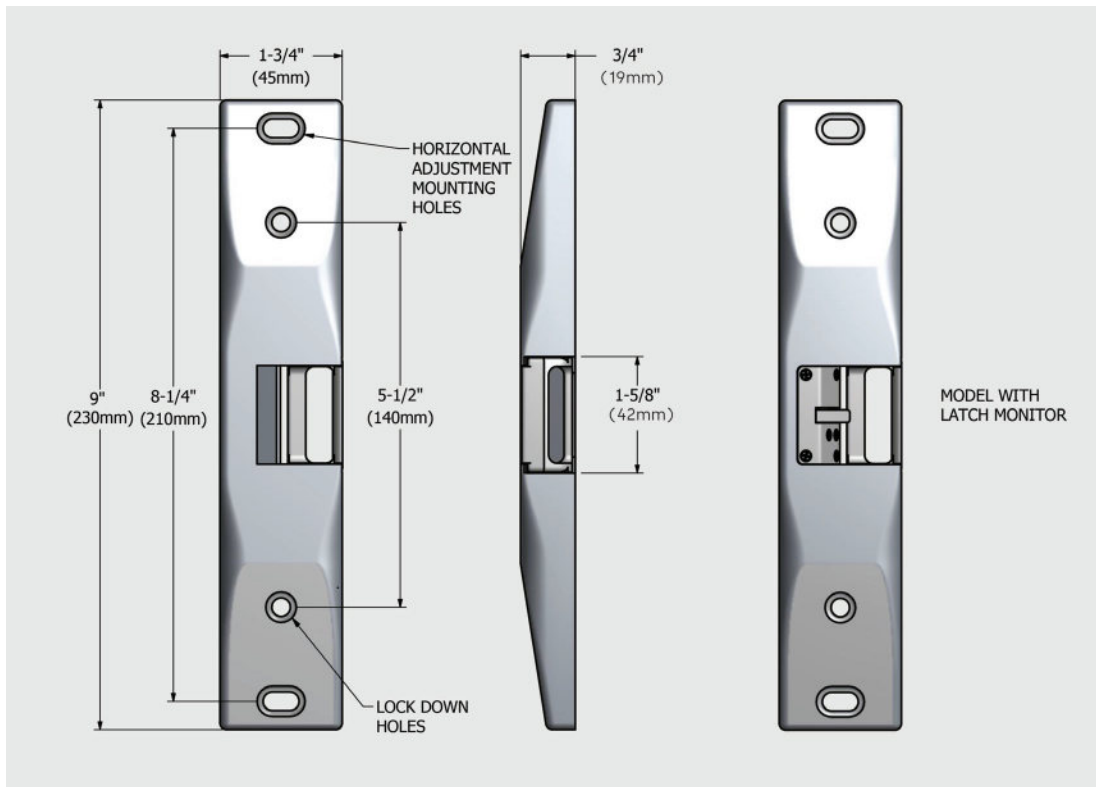

Certifications

- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles (0162X32D & F0162X32D)
- UL 294 Listed for Access Control Unit Accessory (6th Edition)
- UL 1034 burglary-resistant Listed
- UL 10C, 3-hour fire-rating Listed (F0162)
- CAN/ULC S104, 3-hour fire-rating Listed (F0162)
- California State Fire Marshal Listed (CSFM: 3776-2275:0501) (F0162)
- Patent #: US 7,722,097
- Patent #: Canadian 2,597,916



© dormakaba 2025 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation. All trademarks are the property of their respective owners.

Any questions? We would be happy to advise you.
Contact us at: 1-800-265-6630