

dormakaba terminal 96 00

Design meets function



Mobile Access



CardLink / AoC

Benefits at a glance

- 5" bright and colorful touchscreen with a scratch-resistant, hardened glass
- Employee identification via smartphone, RFID, or fingerprint
- USB port for barcode scanning and Digital I/O for controlling physical access or break signaling
- Camera for advanced features such as Employee Image Capture, QR Code Badge authentication, and Facial Recognition
- Text-to-speech for the visually impaired (patented feature)
- Rugged housing with VESA-compatible backplate
- Personalized user experience
- Energy conservation features extend the terminal's lifespan and reduce operating costs

Designed, manufactured, and supported by dormakaba

With its latest K7 generation, the dormakaba terminal 96 00 is engineered for use in diverse environments, featuring energy-efficient hardware components to extend lifespan and reduce operating costs. Its modern electronics enable efficient time and labor tracking, alongside intelligent features such as "text to speech" to enhance the employee experience. The high-resolution touchscreen display provides an intuitive and contemporary user interface, while the robust construction ensures durability and reliability, even in harsh environments.

The dormakaba Terminal 96 00 comes with a wide range of features that cater to the needs of HCM (Human Capital Management) customers globally. Employees are quickly identified using an RFID card or smartphone. Alternatively, biometric identification can be used to reduce time theft and buddy punching while eliminating the added cost of RFID cards. The included USB reader allows for the use of external readers, such as handheld barcode scanners. With an integrated Digital I/O relay setup, the value of your investment can be further extended by restricting access to authorized employees only or controlling signals on your floor to notify employees when it's time for a break.


Factsheet



dormakaba terminal 9600-K7	96 20	96 25	96 40	96 60
Device software				
B-Client_HR40 ¹	●	–	●	●
B-Client XML40 ²	–	●	–	–
Identification				
Multi-RFID reader, LEGIC / MIFARE (SM6300)	○	○	○	○
HID - iCLASS SE, iCLASS, Prox, Prox II	○	○	○	○
Biometrics (fingerprint identification)	○	○	○	○
Host interface				
10/100/1000 Ethernet interface (IPv4, IPv6)	●	●	●	●
WLAN	○	○	○	○
Applications				
Mobile Access	●	–	●	●
CardLink/Access on Card (AoC)	–	–	●	●
Door control & breaking signaling	–	●	–	●
Loudspeaker	●	●	●	●
Energy Saving Mode	●	●	●	●
Color camera	○	○	○	○
Memory Capacity				
50,000 offline records	●	●	●	●

1 For use with SAP ERP and SAP SuccessFactors HCM
2 For use with Workday, Oracle HCM, and PeopleSoft HCM

Standard ●
Optional ○
Not available –

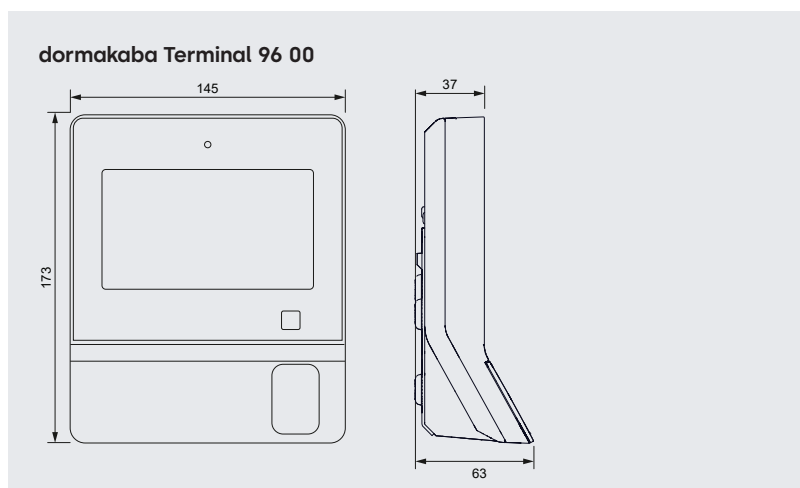

Technical data

System

- 5" HD touchscreen Display
- CPU: Mini Quad Processor
- Memory: 4 GB RAM, 16 GB eMMC Flash
- Operating system: dormakaba Android
- Microphone
- Speaker
- Real-time clock
- Motion Sensors
- Tamper switch

Interfaces

- Internal I/Os (two inputs, one output)
- 1x USB-C, 2.0

Power supply

- Power over Ethernet (IEEE 802.3af)
- Power class 0 (12.95 W)

Environment

- Ambient temperature:
–20 °C to +55 °C
–4 °F to +131 °F
- Relative humidity:
5% to 85% (non-condensing)
- Class of protection according to IEC 60529:
IP20/IP65 (depending on version)

Design and material

- IK08 Impact Resistant Housing
- Hardened-glass Display
- Cast metal back plate
- VESA mounting possible

Dimensions (W x H x D)

- 145 mm x 173 mm x 63 mm
- 5.70 in x 6.81 in x 2.48 in

To learn more about this amazing product, please contact your local expert. You will find further details and order information in the relevant dormakaba catalogues and system descriptions.

Subject to technical modifications.
© 2024 dormakaba. Edition 11/2025



Any questions? We will be happy to assist you.

dormakaba Workforce Solutions, LLC | 3082 North Commerce Parkway, Miramar Florida 33025 | time.clocks@dormakaba.com | dormakaba.com