

E-Plex® 2000

Self-Powered Standalone Pushbutton Lock



Features and benefits

- No wiring required to or through the door, no pinched wires
- Supports up to 100 unique PIN codes
- Non-handed design; field reversible
- ANSI/BHMA Grade 1 certified
- Battery powered (3 AA)
- Stores up to 1,000 audit trail events
- Simple, intuitive keypad programming
- Multiple operating modes including entry, storeroom, residence, privacy
- Available with cylindrical latch, mortise, or rim exit device locking options
- Optional Key-in-Lever cylinder in Schlage® "C" keyway or BEST SFIC or equivalent (6- or 7-pin)
- Easily manage users, PIN codes, programming, and permissions with complementary dormakaba LUNA™ software tool for locksmiths
- Audit trail reports can be retrieved from the lock using M-UNIT handheld

Proven Performance

The E-Plex 2000 electromechanical pushbutton lock eliminates the expense and administrative burden associated with issuing, tracking, and replacing mechanical keys.

Its familiar telephone-style keypad provides simple, reliable operation while delivering durable, cost-effective standalone access control.

E-Plex 2000 locks are powered by 3 AA batteries that load into a slide-up battery tray in the housing, which eliminates wires needed at the door and allows for continuous operation up to 100,000 cycles (depending on frequency of use) providing dependable performance with virtually no maintenance.

Smarter Lock Management with LUNA

E-Plex 2000 locks can now be programmed and managed using the LUNA software tool, allowing PIN codes, programming and user permissions to be centrally managed from a single computer and transferred directly to the lock.

Designed specifically for locksmiths and small standalone installations, LUNA simplifies electronic lock management without the complexity of traditional access control software.

Instead of programming each lock individually or managing PIN codes on paper, users can quickly create, organize, and maintain users, and access permissions in one intuitive application—saving time, reducing errors, and improving overall security.

Locking device options:

Cylindrical Latch:

- 3-hour UL/ULC fire-rated cylindrical latch

Rim Exit Device

- Compatible with most leading brands of rim exit devices
- Exit device and mounting hardware sold separately

Standard mortise:

- 1½ in. (32 mm) faceplate
- Available with: Standard mortise, Deadbolt, Auto-deadbolt configurations

Specifications

Programming	Program each E-Plex 2000 lock easily with LUNA software tool
Authority levels	Code length — Adjustable to accept 4 to 8 digits Anti-tamper lockout — Adjustable from 3 to 9 invalid attempts with an adjustable period of 0 to 90 seconds Relock time — Adjustable from 2 to 20 seconds
User Parameters	Four different levels allow who has access to specific lock functions, including: Master level — performs all set-up and programming functions Manager level — administers common programming functions Access user level — entry granted with valid PIN Service level — codes for single event or single day access, programmable in advance
Operation Modes	PIN access Passage — can be toggled on/off or can be pre-programmed to re-lock after a certain number of hours Lockout

Mechanical features

Construction	Heavy-duty commercial Grade 1 lockset, solid cast exterior housing, solid cast levers, cylindrical drive wear tested for extensive use in indoor and outdoor applications
Numeric Keypad	Vandal resistant, solid metal pushbuttons
Backset	Cylindrical: 2-3/4" (70 mm) backset, 2-3/8" (60 mm) backset Mortise: 2-3/4" (70 mm) backset Exit trim model: Varies by exit device
Latches	Cylindrical models: 1/2" (13 mm) throw latch Mortise models: 3/4" (19 mm) latch, 1" (25 mm) dead bolt (optional) and auto dead bolt (optional)
Strikes	Cylindrical locks packaged standard with both ANSI A115.3 "T" Strike and A115.2 ASA Strike
Exit Device	Will function with exit device (Exit device is not supplied; see list below for compatibility)
Exit Device Latch	Supplied with Exit Device
Exit Device Hub Rotation	Up to 60°
Minimum Stile Required	5" (127 mm)
Weight	Cylindrical and Mortise Models: 8 lbs. (3.63 kg)
Finishes	Satin Chrome 626 (26D) housing and levers Optional Satin Brass 606 (04) housings and levers

Exit device compatibility

- Arrow Rim # 3800
- Corbin Rim # 5200
- Detex Rim # F1001
- Detex Surface Vertical Rod #s 20/F20
- dormakaba Rim #F9300
- Precision Rim #s 21/FL21
- Exit Trim Models: 10lbs (4.54kg)
- BEST Precision Surface Vertical Rod #s 22/FL22
- Sargent Rim # 8800
- Von Duprin Concealed Vertical Rod #s 9847/9947
- Von Duprin Mortise #s 9875/9975
- Von Duprin Rim #s 89/99
- Von Duprin Surface Vertical Rod #s 9827/9927
- Yale Concealed Vertical Rod # 7160
- Yale Rim # 7100


Attention: Compatibility is subject to change if modifications are made by Exit Device manufacturers without dormakaba's knowledge.

Key override options


Key-in-lever cylinder	Optional Key-in-Lever cylinder in Schlage "C" Keyway with black cap
Interchangeable core	SFIC Best and equivalent (6 or 7-pin length); cylinder not included

Installation



Door preparation	Cylindrical and exit trim — ASA 161 (Easily installs on door preparation with three additional through bore holes (wood or metal doors) Mortise — ASA 86 door preparation with three additional through bore holes
Door thickness	Cylindrical model: 1-3/8" (35 mm) to 2-1/2" (64 mm); pre-assembled to accommodate doors 1-5/8" (41 mm) to 2" (50 mm) Exit Trim and Mortise Models: 1." (44 mm) to 2." (57 mm); Pre-assembled to accommodate doors 1." (44 mm) to 2 1/8" (54 mm)
Items supplied include	Cylindrical/Mortise: Lock assembly, installation manual, template, quick reference guide, operations manual, and required hardware Exit trim: Lock assembly, installation manual, template, quick reference guide, operations manual, and required hardware Exit Device and mounting hardware not included.
Additional items (Supplied with key-in-Lever model only)	Includes Universal dormakaba 1539 6-pin cylinder, two nickel silver keys, and Schlage "C" Keyway
Accessibility standard	Americans with Disabilities Act (ADA)
Fire rating	UL 10C, UL10B and CAN/ULC-S104 fire rated
Durability	ANSI/BHMA Grade 1 Certified (A156.25, A156.2, A156.13)
Environmental	Indoor/Outdoor approved; -31 °F (-35 °C) to 151 °F (66 °C); IP55 and Windstorm approved/certified
Warranty	3-year warranty

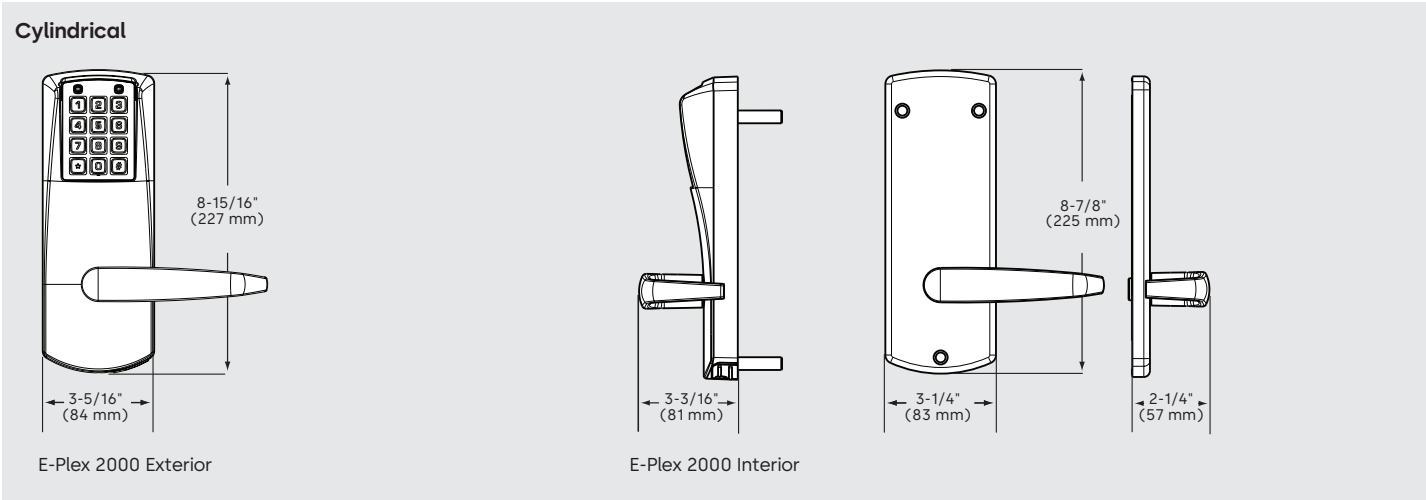



Mortise



E-Plex 2000 Exterior

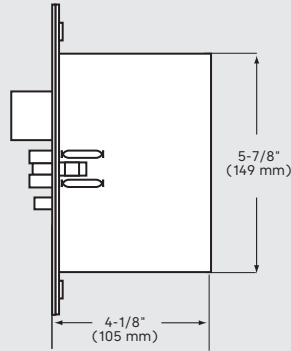


E-Plex 2000 Mortise


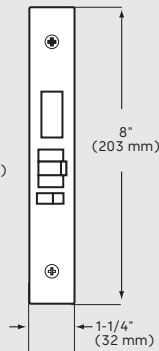


E-Plex 2000 Interior

Exit trim



E-Plex 2000 Exterior



E-Plex 2000 Interior
(Exit device not included)

© dormakaba 2026 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation. All trademarks are the property of their respective owners.

Any questions? We would be happy to advise you.
Contact us at: 1-800-849-8324