


Dual Monitor Cabinet Lock

In or Out... we make it Easy!"

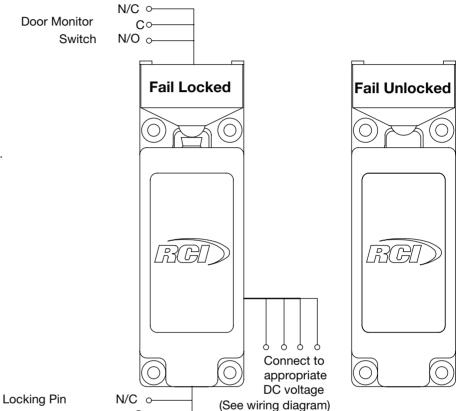


Instructions For Lock Mode Change

- 1. Remove the 2 screws on the bottom.
- 2. Remove base plate and solenoid.
- 3. Turn assembly 180° and install into housing.

NOTE: Care should be taken to prevent damage to switch lever.

4. Insert the two screws.


Overall and Mounting Dimensions

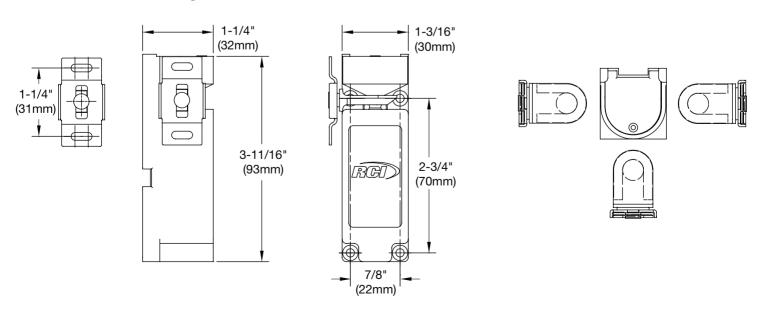

Monitor Switch


C ↔ N/O ↔

3513-DM Installation Instructions (Continued)

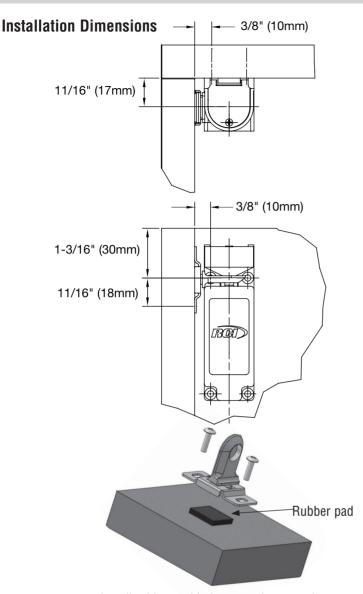


Install rubber pad in between the mounting surface and catch to secure catch position

Locking Pin Monitor Switch Wiring Diagram 125VAC; 1A / 30VDC; 0.5A



Door Monitor Switch Wiring Diagram 125VAC; 3A / 30VDC; 2A

NO	ORANGE	
NC	BLUE	_
C	BLACK	_

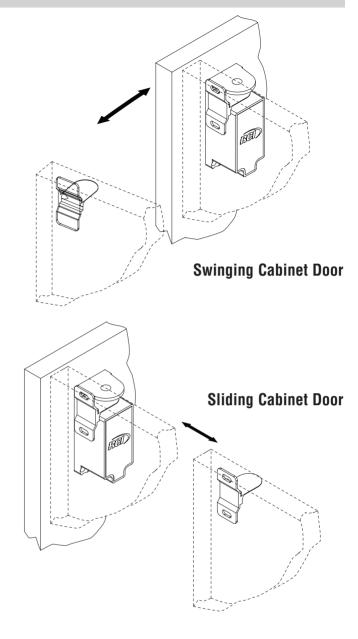

Cabinet Lock Dual Voltage Wiring Diagram 12VDC (200mA)

RED BLUE	12VDC
YELLOW BLACK	GND

Cabinet Lock Dual Voltage Wiring Diagram 24VDC (100mA)

RED		— 24VDC	
BLUE			
YELLOW			
BLACK		→ GND	