dormakaba

C300 Series
Grade 2 cylindrical locksets

C300 Series Grade 2 cylindrical locksets

Adjustable for 2-3/8" to 1-3/4" thick door

Cylindrical chassis

Optional fire rated latch

ADA compliant levers
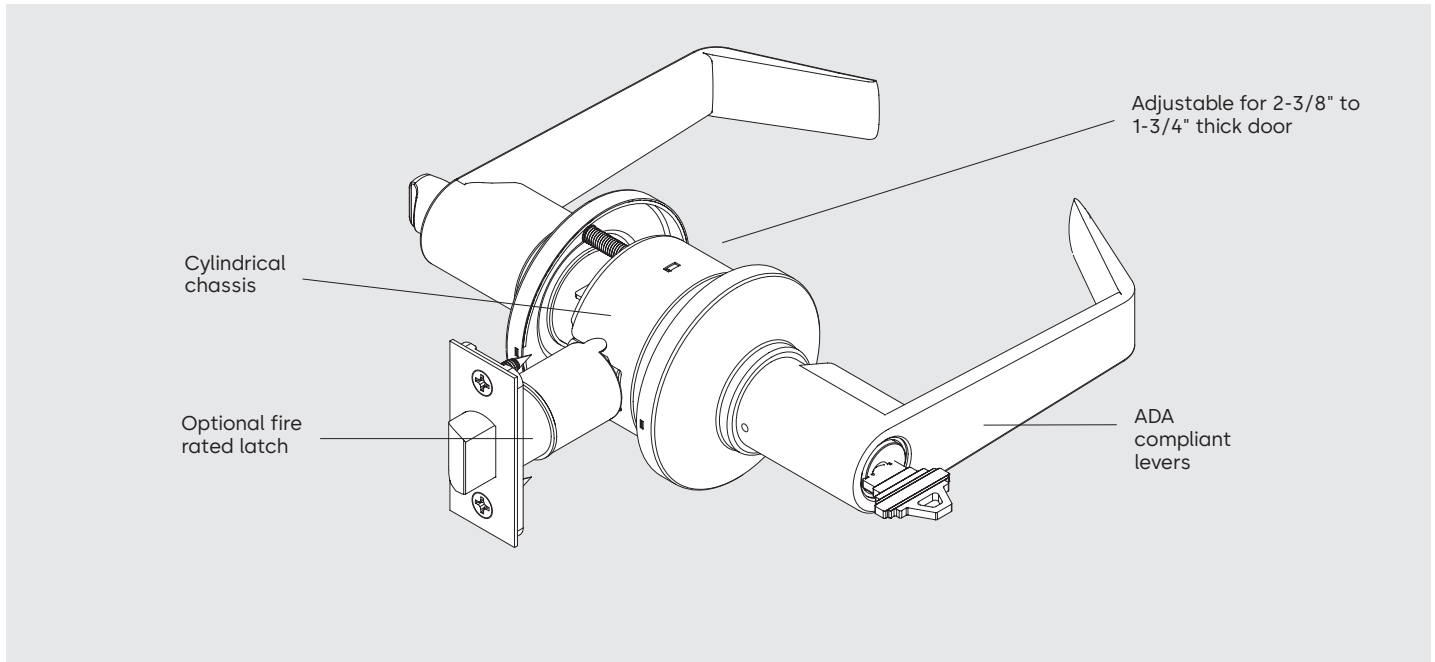
The C300 is an economy ANSI/BHMA certified Grade 2 cylindrical lever lockset geared for light-duty, price sensitive commercial applications.

The C300 features a 2-1/2" diameter rose and is suited for multifamily apartment units, condominiums, hotels, assisted living, and other commercial facilities of a light duty type.

Features

- Concealed fasteners on rose.
- Door thickness range from
- 1-3/8"–1-3/4".
- 1/2" throw latch.
- Available backsets: 2-3/8" or 2-3/4". Please specify when ordering.
- 2-1/2" diameter rose.
- Non-handed for easy installation (LS lever is handed).

Certification

- ANSI/BHMA A156.2
- Grade 2 certified.
- Optional UL listed 3 hour fire rated.
- Meets A117.1 accessibility code and ADA requirements for barrier-free accessibility.

Finishes

- 605 (Bright Brass)
- 613 (Dark Bronze)
- 619 (Satin Nickel)
- 626 (Satin Chrome)

Lever styles

- LR, LC, LG, LS

Recommended applications

- Apartments
- Assisted living
- Condominiums
- Other multifamily housing

Warranty

For details, refer to Limited Warranty on our website.

dormakaba USA Inc. quality and environmental management systems in Reamstown, PA and Steeleville, IL are certified to ISO 9001:2008 and ISO 14001:2004.

How to order C300 Series locksets

Product family
Grade 2 cylindrical lockset

Lever
Lever (handed)	LSB
Lever	LGB
Lever	LCB
Lever	LRB

Backset
2-3/8" fire	238F
2-3/4" fire	234F
2-3/8" non-fire*	238N
2-3/4"non-fire*	234N

Strike
ANSI strike, square corner	5001
T strike, square corner	5101
Full lip, square corner	5201
Full lip, radius corner	5202

Cylinder type
| D | Standard cylinder |

Keying

Order string: C3 | 53 | LRB | 626 | 234F | 100R | 5202 | RH | D | SCKD

Function
Single dummy	01
Passage	10
Patio	30
Privacy	40
Entry	53

Finish
626	Satin chrome
613	Dark bronze
619	Satin nickle
605	Bright brass

Faceplate
100S	1" square
118S	1-1/8" square
100R	1" radiused
DRIV	Drive-in

Handing
| RH |
| LH |

Keyway
| SC | SC keyway |
| D100 | DORMA SKC D100 keyway |

* C353 and C330 only available with fire rated latch.

Finish availability chart

	626	613	619	605
LR	•	•		
LC	•	•		•
LG	•	•	•	
LS		•	•	•

Trim options

Lever designs

LC Lever

2-1/2 (64) 4-1/2 (114) 2-5/8 (67)

LG Lever

3-5/16 (84) 4-1/2 (114) 2-3/8 (60)

LR Lever

2-1/2 (64) 4-1/2 (114) 2-5/8 (67)

LS Lever

2-1/2 (64) 4-1/2 (114) 2-5/8 (67)
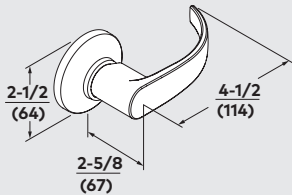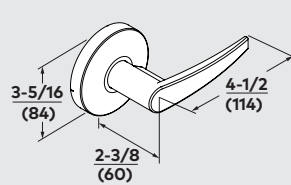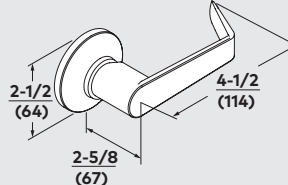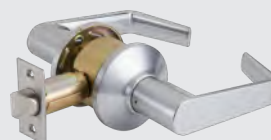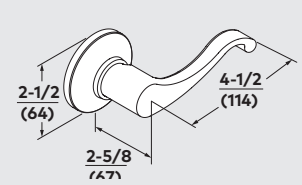
Functions

Function	Series	Outside/Inside	Description
Dummy trim one side	C301		• Used as pull or matching trim on pairs of doors. • Indicates rigid lever
Passage/closet	C310	**F75**	• Latch bolt operated by trim either side at all times.
Patio Only available with fire rated latch	C330	**F77A**	• Deadlocking latch bolt operated by trim either side. • Outside trim locked by push button inside. • Outside trim unlocked by trim inside. • Outside trim unlocked by closing door. • Inside trim always unlocked. • Do not use in rooms that have no other entrance.
Privacy, bedroom, or bath	C340	**F76A**	• Latch bolt operated by trim either side. • Outside trim locked by push button inside. • Outside trim unlocked by emergency release outside. • Outside trim unlocked by trim inside. • Outside trim unlocked by closing door. • Inside trim always unlocked.
Entry Only available with fire rated latch	C353	**F109**	• Deadlocking latch bolt operated by trim either side, except when outside trim locked by push button inside. • Key outside releases push button, unlocking outside trim, except when inside button pushed and turned to keep outside trim locked. • Operating inside trim releases push button, unlocking outside trim, except when inside button pushed and turned to keep outside trim locked. • Inside button must be turned to unlock outside trim. • Inside trim always operates latch bolt.

Lock options

Strikes

ANSI strike - 5001

T strike - 5101

Full lip - 5201 (square corner)
or 5202 (radius corner)