


9000 Series

Narrow stile exit devices

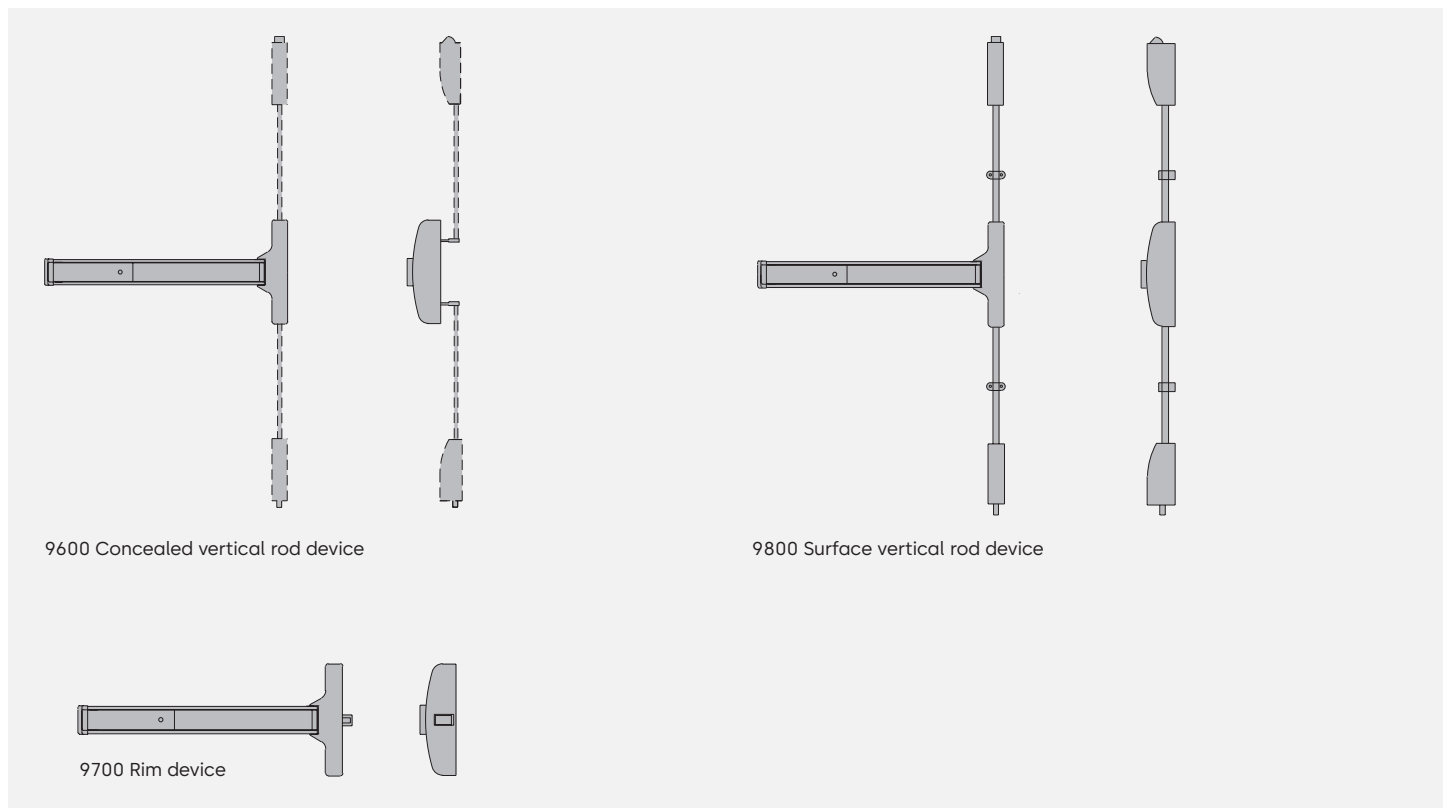

Applications

dormakaba's series of high quality exit devices includes a narrow stile design for installation on aluminum doors and frames. Products are available for both labeled and nonlabeled openings.

For construction documents:

- OmniClass™ 23-30 40 11 31 Door Locking Hardware.
- UniFormat™ B1050 Exterior Doors Hardware, C1030 Interior Doors Hardware.
- MasterFormat™ 08 71 00 Hardware.

Listings & approvals:

- Certified/listed to ANSI/BHMA 156.3, Grade 1 for exit devices.
- UL and CUL listed under their continuing reinspection programs and conforms to standards UL 10B & 10C positive pressure testing.
- Complies with NFPA 101 life safety code. Fire rated devices comply with NFPA 80 fire doors and windows.
- CSFM approved, California State Reference Code 1989 (title 19).
- Devices, trim, pulls, and levers comply with the Americans for Disabilities Act, 1994, and ANSI 117.1-2003 for accessible and usable buildings and facilities.
- Contributes to U.S. Green Building Council, LEED MR Credits 2.1, 4.1, 4.2 and 5.1.

Finishes

Architectural finishes

- Brass: 605 (Bright) or 606 (Satin)
- Bronze: 611 (Bright), 612 (Satin), or 613 (Oxidized Satin Oil Rubbed)
- Nickel: 619 (Satin) Chrome: 625 (Bright) or 626 (Satin)
- Stainless Steel: 630 (Satin)

Powder coated finishes

- Aluminum: 689
- Bronze: 691 (Dull) or 695 (Dark Duranodic)
- Black: 693
- Gold: 696

Clear powder coating: Specify P

Antimicrobial protected coating:
Specify AM

dormakaba Solutions

- Corrosion-resistant, heavy-duty gage stainless steel offered standard.
- 12 separate electronic monitoring and control options for managing critical access/egress control applications.
- Choose from 14 ANSI/BHMA standard architectural finishes, or dozens of dormakaba Custom RAL colors, or, for those unique interior designs, dormakaba's Designer Color special color matching system.
- Hundreds of trim and lever styles and finish combinations to satisfy the most demanding interior design requirement.
- Antimicrobial protected coating when ultra clean environments are specified.
- Clear powder coating for outdoor or highly corrosive environments that need added protection. Also minimizes the appearance of fingerprints.

Warranty

10 year mechanical/2 year electrical.

Functions

ANSI	Description	9600	9700	9800
1	Exit Only – No Trim	x	x	x
2	Entrance by trim when actuating bar is locked down.	x	x	x
3	Entrance by trim when latch bolt is retracted by key. Key removable only when locked.	x	x	x
4	Entrance by trim when latch bolt is retracted by key or set in retracted position by key.	x	x	x
8	Entrance by knob or lever. Key locks or unlocks knob or lever.	x	x	x
9	Entrance by knob or lever only when released by key. Key removable only when locked.	x	x	x
11	Entrance by thumbturn. Key locks or unlocks thumbturn.	x	x	x
12	Entrance by thumbturn when unlocked by key. Key removable only when trim is locked.	x	x	x
23	Entrance by knob or lever (no cylinder). Trim always active.	x	x	x
25	Entrance by thumbturn and pull (no cylinder). Thumbturn always active.	x	x	x

© dormakaba 2025 Information on this sheet is intended for general use only. dormakaba reserves the right to alter designs and specifications without notice or obligation.

Any questions? We would be happy to advise you.
Contact us at: 1-800-523-8483