



MUTO Comfort XL two door panels glass preparation

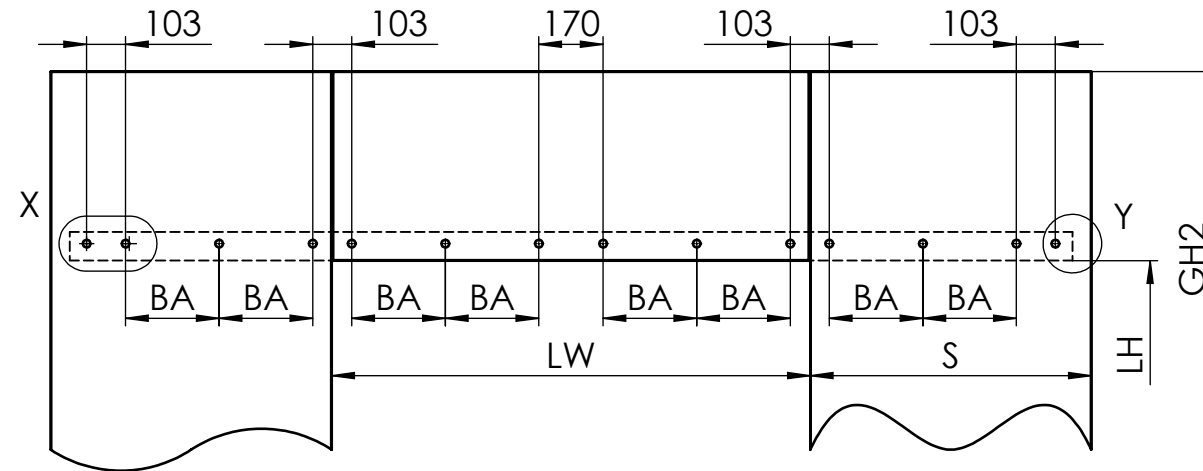


$A = LW/2 + 27$
$B = 4 \times A + 12$
$BA^* = 2 \times (LW - 106 - 170) / T$

A	Glass width	
AB	quantity of drilling	
B	Length of track	
BA	Drilling distance	
GH2	Glass height Sidelight	
LH	Clear opening height	
LW	Clear opening width	
S	Glass width sidelight	
T	quantity of drilling distance (BA*)	
	T	AB
$1200 < LW \leq 1500$	8	14
$1500 < LW \leq 2000$	12	18
$2000 < LW \leq 2900$	16	22

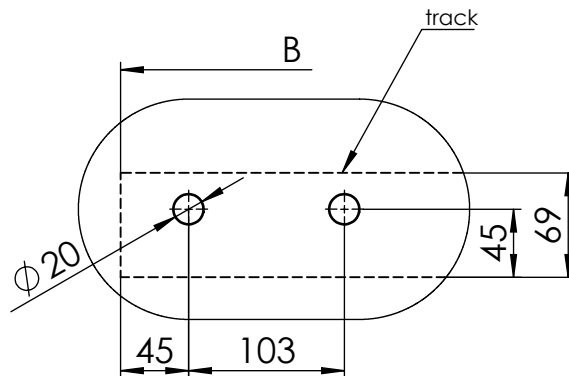

Detail X (1 : 5)



Detail Y (1 : 5)

	XL 150	XL DORMOTION 80	XL DORMOTION 150	XL Self-Closing
min. door width without DORMOTION:	660mm	660mm	660mm	-
min. clear opening width without DORMOTION:	1266mm	1266mm	1266mm	-
min. door width with DORMOTION:	-	810mm	1020mm	850mm
min. clear opening width with DORMOTION:	-	1566mm	1986mm	1646mm
max. door width:	1470mm	1470mm	1470mm	1470mm
max. clear opening	2886mm	2886mm	2886mm	2886mm
max. door height:	3000mm	3000mm	3000mm	3000mm
max. door weight:	150 kg	150 kg	150 kg	120 kg
Glass thickness:	TSG/LSG 8 - 13,5mm	TSG/LSG 8 - 13,5mm	TSG/LSG 8 - 13,5mm	TSG/LSG 8 - 13,5mm
DORMOTION	no	yes	yes	yes
performed to	DIN EN 1527	DIN EN 1527	DIN EN 1527	DIN EN 1527